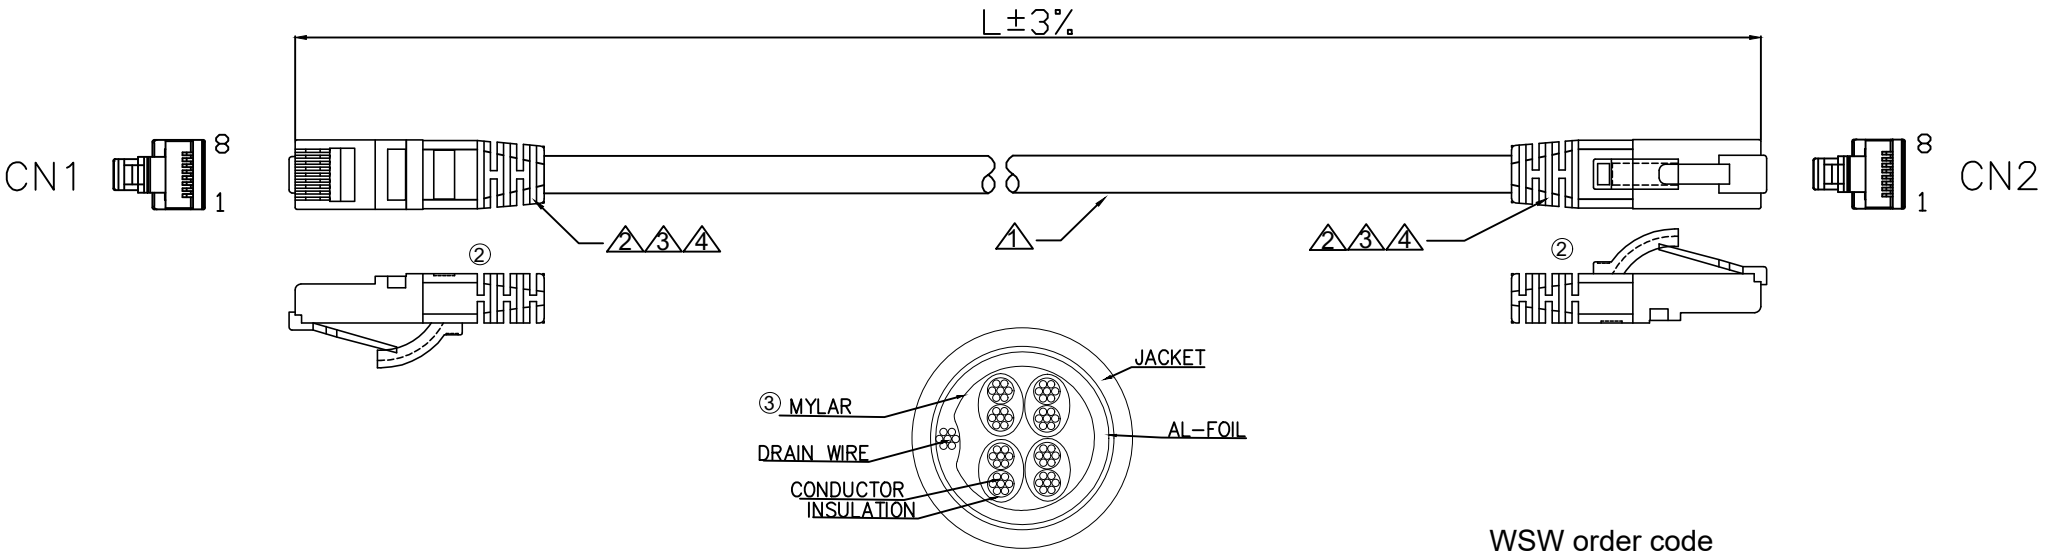


PIN OUT

CN1	WIRE COLOR	CN2
1	ORANGE/WHITE	1
2	ORANGE	2
3	GREEN/WHITE	3
6	GREEN	6
4	BLUE	4
5	BLUE/WHITE	5
7	BROWN/WHITE	7
8	BROWN	8
SHELL	DRAIN WIRE	SHELL

TEST CONDITION: ④
1.1OO% OPEN & SHORT TESTING
2.VOLTAGE:300V DC
3.INSULATION RESISTANCE:10M ohm
4.CONTACT RESISTANCE:3 ohm(1M~3M)
5 ohm(5M~10M)
8 ohm(15M)

NO:	NAME	DESCRIPTION	Q'TY	UNIT
④	AL-Foil	Double-sided conductive aluminum foil ②	2	PCS
③	Molding	PVC 65P Color: see order code ②	NA	KG
②	CONNECTOR	RJ45 8P8C two fork 3u" gold plated with metal shield	2	PCS
①	CABLE	CAT5e F/UTP (26AWG*1PR)*4+Mylar+D(AM)+A+PVC OD=5.2± 0.3MM Color: see order code ②③	NA	MM

WSW order code
AMJG0808-xxxx-xxB-26①

Cable length
0030: 0.3M
0050: 0.5M
0100: 1.0M
0150: 1.5M
0200: 2.0M
0300: 3.0M
0500: 5.0M
0700: 7.0M
1000: 10M
1500: 15M

Cable&Molding color
BK: Black
RD: Red
YE: Yellow
GN: Green
GY: Grey
BU: Blue
WH: White
BN: Brown

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	
DIM	TOL
Angle	TOL

Id.	Modification	Date	Name
④	Add test condition	11.03.2026	Luca
③	Add mylar into cable	20.08.2024	Luca
②	Change the plant	12.04.2022	Amy
①	Update the WSW order code	02.06.2017	Amy
⓪	Drawn	30.03.2017	Amy

		Date	Name
Drawn		30.03.2017	Amy
Approved		11.03.2026	Luca

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
① AMJG0808-xxxx-xxB-26

Drawing-No.
ASS 7947 CA

rev04

Replace

Sheet