
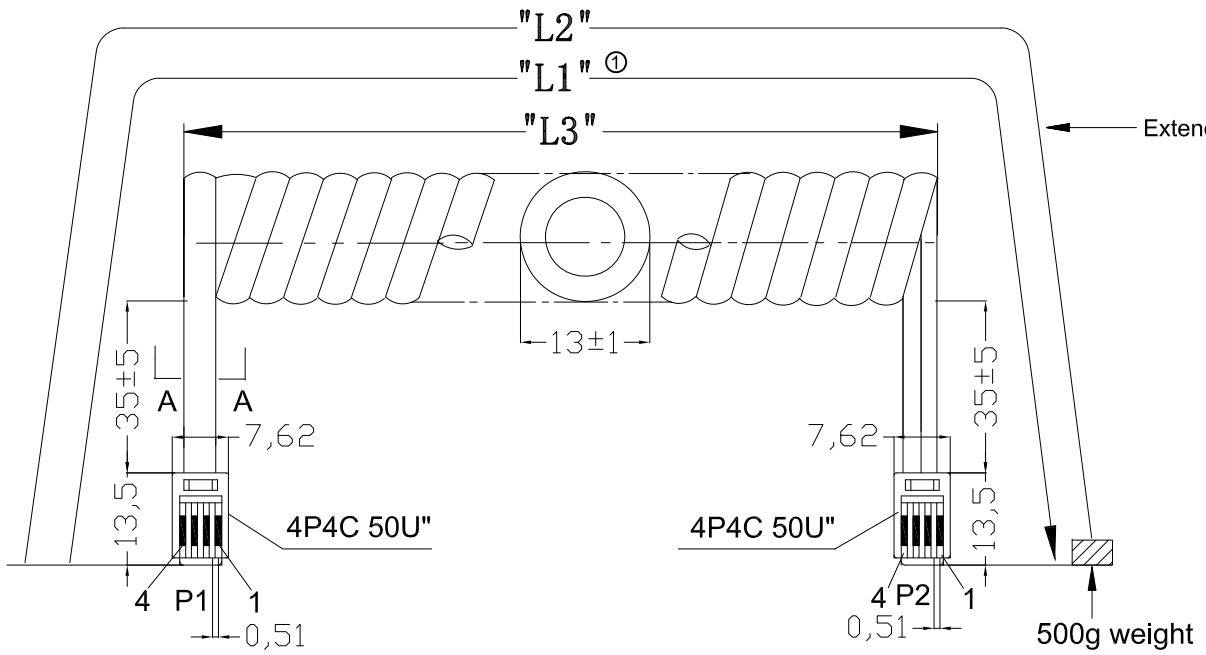


Note for plug:

Material:
Housing-Polycarbonate,clear.
Terminal-0.36[.014] thick phosphor bronze.
Thick gold in localized gold plate.
Area,Gold flash over the remainder.
Over 2.54mm[.000100] thick nickel underplate.

① Conductor: [26AWG(0.12x12) BARE COPPER]x4C.
① Insulation: (PP6331 ID:0.95-1.0)x4C.
① Jacket: PVC NOUL 80P.
① Package: Individual PE Bag.

SEC: A-A

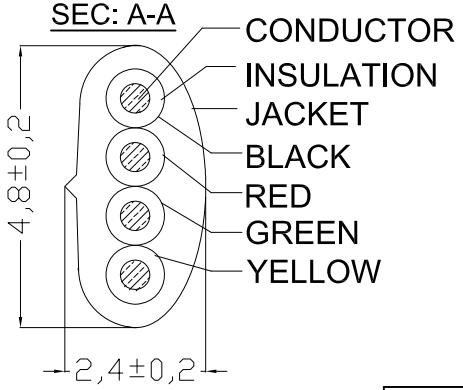

TERMINATION

P1		P2
1	Black	1
2	Red	2
3	Green	3
4	Yellow	4

Order code: AT-C-26-4/4/X-XX/R ①

Order color:
B: Black
W: White
S: Silver

Length Code	Retracted Length(L3)	Extended Length(L2)	Cut Length(L1)
5	330±30	5.0FT-5.75FT	2300-2400
7	470±30	7.0FT-8.05FT	3000-3200
10	630±50	10.0FT-11.5FT	4300-4500
12	800±50	12.0FT-13.8FT	5200-5400
14	850±50	14.0FT-16.1FT	5800-6000
25	1900±50	25.0FT-28.75FT	10800-11000

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	
.x	±0.50
.xx	±0.20
DIM	TOL
Angle	±2°

Id.	Modification	Date	Name
①	Update the notes, and add the cut length	08.05.2019	Segal
⓪	Drawn	18.12.2017	Amy

	Date	Name
Drawn	18.12.2017	Amy
Approved	08.05.2019	Amy

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
AT-C-26-4/4/X-XX/R

Drawing-No.
ASS 8161 CA

rev01

Replace