
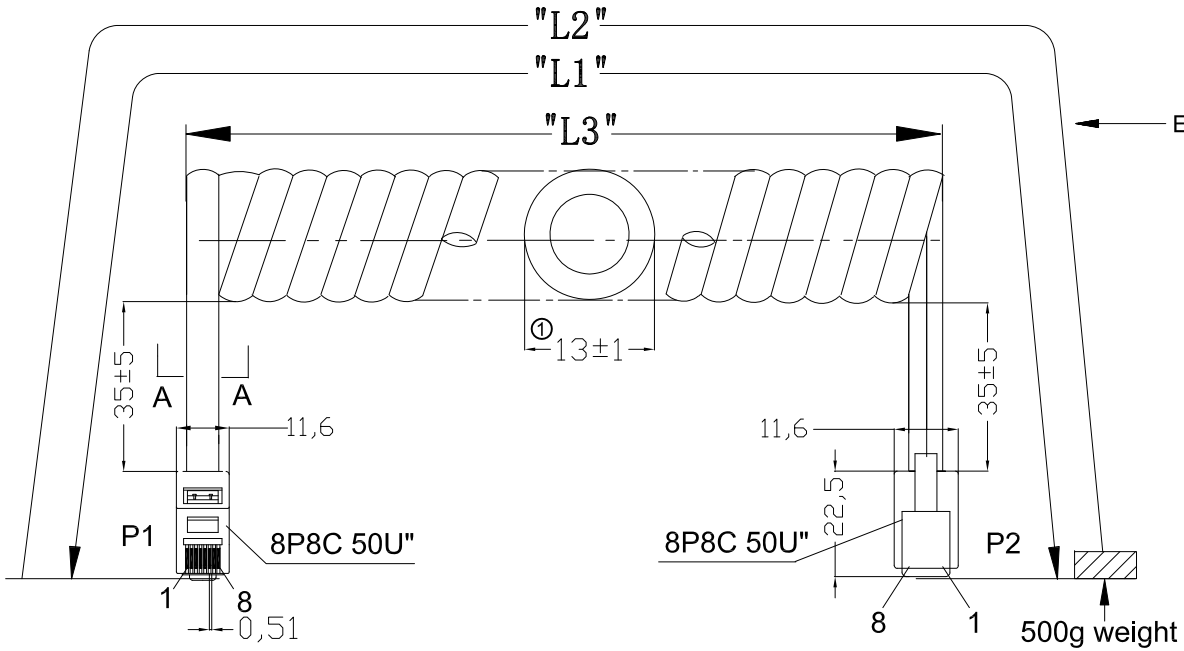


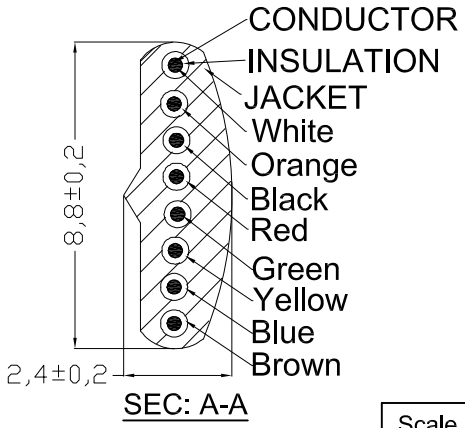

SEC: A-A

P1		P2
1	White	8
2	Orange	7
3	Black	6
4	Red	5
5	Green	4
6	Yellow	3
7	Blue	2
8	Brown	1

Note for plug:

Material:
Housing-Polycarbonate,clear.
Terminal-0.36[.014] thick phosphor bronze.
Thick gold in localized gold plate.
Area,Gold flash over the remainder.
Over 2.54mm[.000100] thick nickel underplate.
① Conductor: [26AWG(0.12x12) BARE COPPER]x8C.
① Insulation: (PP6331 ID:0.95-1.0)x8C.
① Jacket: PVC NOUL 80P.
① Package: Individual PE Bag.

Order code: AT-C-26-8/8/x-xx ①

Order color:
B: Black
W: White
S: Silver

	Length Code	Retracted Length(L3)	Extended Length(L2)	Cut Length(L1)
	5	700±50	5.0FT-5.75FT	2900-3000
	7	1000±50	7.0FT-8.05FT	4000-4200
	10	1500±50	10.0FT-11.5FT	5900-6100
	12	1650±50	12.0FT-13.8FT	7000-7200
	14	1900±50	14.0FT-16.1FT	7600-7800
②	25	3200±50	25.0FT-28.75FT	14300-14500

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	
.x	±0.50
.xx	±0.20
DIM	TOL
Angle	±2°

Id.	Modification	Date	Name
②	Update the code	08.05.2019	Segal
①	Update the dimension, notes, and add the cut length	22.02.2019	Segal
⓪	Drawn	18.12.2017	Amy

	Date	Name
Drawn	18.12.2017	Amy
Approved	08.05.2019	Amy

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
AT-C-26-8/8/x-xx

Drawing-No.
ASS 8164 CA
rev02

Replace