



	1	2	3	4	5	6	7		
A	②	Wire Spec		UL2725 (7/0.127TC*1P+D+AL+MYLAR)*2+7/0.127T*1P+7/0.20T*2C+F+ADB					A
B		Cores		2P	1P	2C			B
		Conductor	AWG	28AWG	28AWG	24AWG			
			Material	Tinned Copper	Tinned Copper	Tinned Copper			
			Construction	7/0.127±0.004mm	7/0.127±0.004mm	7/0.2±0.004mm			
O.D			0.38mm (REF)	0.38mm (REF)	0.60mm (REF)				
C		Insulation	Thickness	0.26mm (REF)	0.23mm (REF)	0.25mm (REF)			C
			O.D	0.90±0.05mm	0.84±0.05mm	1.10±0.05mm			
			Color	Yellow,Blue,Orange,Purple	WHITE, GREEN	RED, BLACK			
			Material	Foamed PE	HDPE	SR-PVC			
D		Filler	Filler	FILLER					D
E		Braid	Material	AL-MG					E
			Construction	16/6/0.12mm					
F		Shield	AL foil	Color :Blue					F
	MYLAR		White						
G	Drain	Material	Tinned Copper					G	
		Construction	7/0.127T						
H	Outer Jacket	Material	80°C PVC 80P					H	
		O.D	5.5±0.20mm						
		Color	Black						
		Font	White						
	②	Print: AWM STYLE 2725 80°C 30V 28AWG/3P 24AWG/2C --- c AWM I/II A 80°C 30V FT1 USB CABLE							
		RoHS compliant		Unit:mm					
		Scale	Free				Date	Name	Customer-No.
		TOLERANCE					Drawn	26.01.2018	Winnie
				③	Correct Brown to Purple	06.09.2018	Xavier	Approved	29.08.2018
				②	Update	29.08.2018	Xavier		
		DIM	TOL	①	Update	07.08.2018	Xavier		
				①	Drawn	26.01.2018	Winnie		
		Angle	TOL	Id.	Modification	Date	Name		
	1	2	3	4	5	6	7		

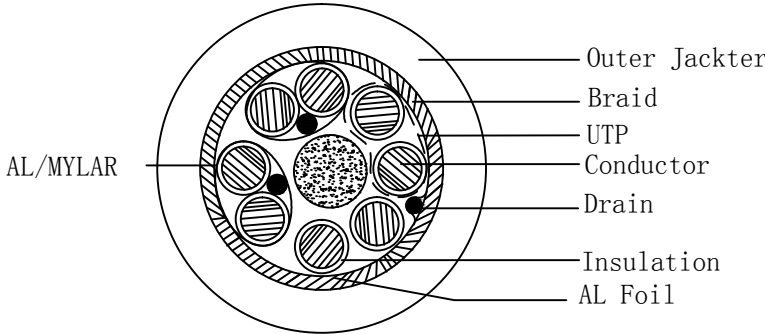

① Wire color assignment



Packing: 305M/Reel



ASS 8186 CA rev03

Sheet 1 / 1

CAB0844