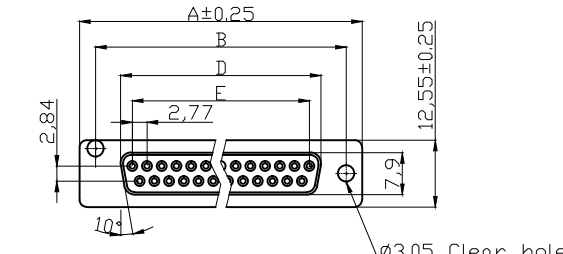
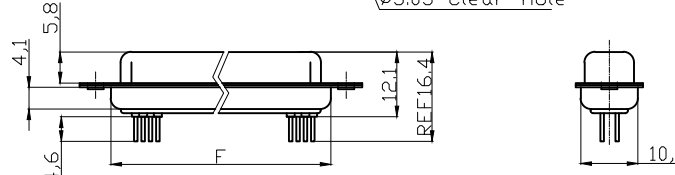
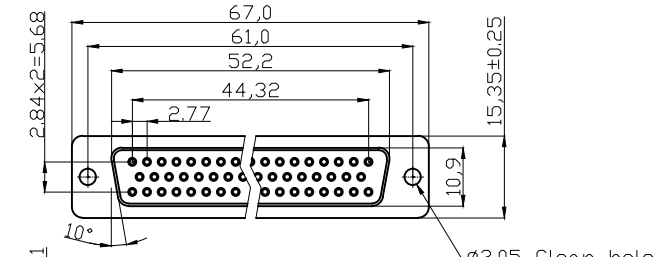
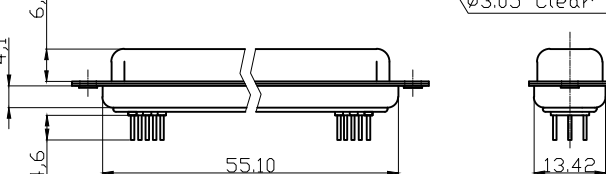
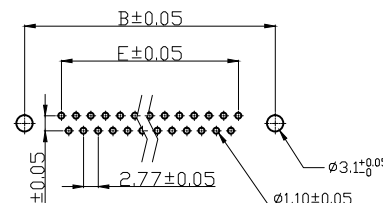
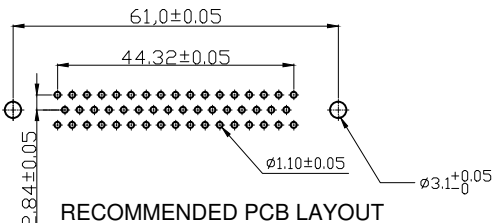


	1	2	3	4	5	6	7																																																																																					
A	Female     50 POSITIONS  RECOMMENDED PCB LAYOUT  RECOMMENDED PCB LAYOUT NOTES: MATERIAL 1.Insulator Material:Glass-filled thermoplastic PBT,UL94V-0, Black 2.Contact Material: Copper Alloy 3.Shell :Steel, 100 μ" Tin Over 50μ" min Copper 4.Clinch Nut :Brass,Nickel Plated 5.Contact plating : Gold flash full gold ELECTRICAL 1.Current Rating : 3AMP 2.Voltage Rating : 250V AC/rms 60Hz 3.Contact Resistance: 20mΩ 4.Insulation Resistance: 1000MΩ min at 500 VDC 5.Withstand Voltage: 1000V AC/rms 60Hz for 1 minute ENVIRONMENTAL ① 1.Temperature Range:-55°C~+105°C UL No. E198287							A																																																																																				
B								B																																																																																				
C								C																																																																																				
D								D																																																																																				
E								E																																																																																				
F								F																																																																																				
G	RoHS compliant Unit:mm <table><tr><td>Scale</td><td>Free</td><td></td><td></td><td></td><td></td><td>Date</td><td>Name</td><td>Customer-No.</td></tr><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td>Drawn</td><td>18.10.2018</td><td>Xavier</td></tr><tr><td>X.</td><td>±0.38</td><td></td><td></td><td></td><td></td><td>Approved</td><td>18.10.2018</td><td>Winnie</td></tr><tr><td>X.X</td><td>±0.25</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.XX</td><td>±0.13</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td>①</td><td>Update temperature range</td><td>04.06.2019</td><td>Xavier</td><td colspan="3" rowspan="3">ASSMANN WSW components</td></tr><tr><td>X.°</td><td>±3°</td><td>②</td><td>Drawn</td><td>18.10.2018</td><td>Xavier</td></tr><tr><td>X.X°</td><td>±1.0°</td><td></td><td></td><td></td><td></td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td colspan="3">ASS 8237 CO rev01</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td colspan="3">Replace Sheet 2/2</td></tr></table>							Scale	Free					Date	Name	Customer-No.	TOLERANCE						Drawn	18.10.2018	Xavier	X.	±0.38					Approved	18.10.2018	Winnie	X.X	±0.25								X.XX	±0.13								DIM	TOL	①	Update temperature range	04.06.2019	Xavier	ASSMANN WSW components			X.°	±3°	②	Drawn	18.10.2018	Xavier	X.X°	±1.0°					Angle	TOL	Id.	Modification	Date	Name	ASS 8237 CO rev01									Replace Sheet 2/2			G
Scale	Free					Date	Name	Customer-No.																																																																																				
TOLERANCE						Drawn	18.10.2018	Xavier																																																																																				
X.	±0.38					Approved	18.10.2018	Winnie																																																																																				
X.X	±0.25																																																																																											
X.XX	±0.13																																																																																											
DIM	TOL	①	Update temperature range	04.06.2019	Xavier	ASSMANN WSW components																																																																																						
X.°	±3°	②	Drawn	18.10.2018	Xavier																																																																																							
X.X°	±1.0°																																																																																											
Angle	TOL	Id.	Modification	Date	Name	ASS 8237 CO rev01																																																																																						
						Replace Sheet 2/2																																																																																						
H								H																																																																																				
	1	2	3	4	5	6	7	CON1370																																																																																				