



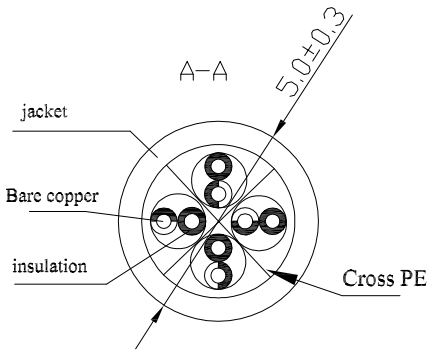

PIN OUT

P1	WIRE COLOR	P2
1	ORANGE/WHITE	1
2	ORANGE	2
3	GREEN/WHITE	3
6	GREEN	6
4	BLUE	4
5	BLUE/WHITE	5
7	BROWN/WHITE	7
8	BROWN	8



Material:

. Conductor: 26AWG 7*0.16±0.015mm
. Conductor Insulation color coding: (1)White/Orange, (1)Orange, (1)White/Green, (1)Green, (1)Blue, (1)White/Blue, (1)White/Brown, (1)Brown
. Included printing on cable jacket: *CM (UL) C(UL) 4P 26AWG UTP CAT.6 PATCH CABLE ISO/IEC & EN & ANSI/TIA-568-C.2*
. Cable Assembly: White cable tie, Wiring T568B color, Plug RJ45 8P8C 3μ pc UL 94V-2
. Cable Jacket color: Grey
. Length: L±3%m
. Dielectric strength: 2.5KV dc-2seconds
. Working temperatures: -20°C~60°C

RoHS compliant

Unit: mm

Order Code: A-MCU60**xxx**

Order lengths in meter: 0.5,1, 2,3,5,7,10,15,20,30

Scale	Free
TOLERANCE	
DIM	TOL
Angle	TOL

Id.	Modification	Date	Name
⓪	Drawn	08.05.2018	Segal

	Date	Name
Drawn	08.05.2018	Segal
Approved	08.05.2018	Amy

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
A-MCU60xxx

Drawing-No.
ASS 8285 CA

rev00

Replace

Sheet