
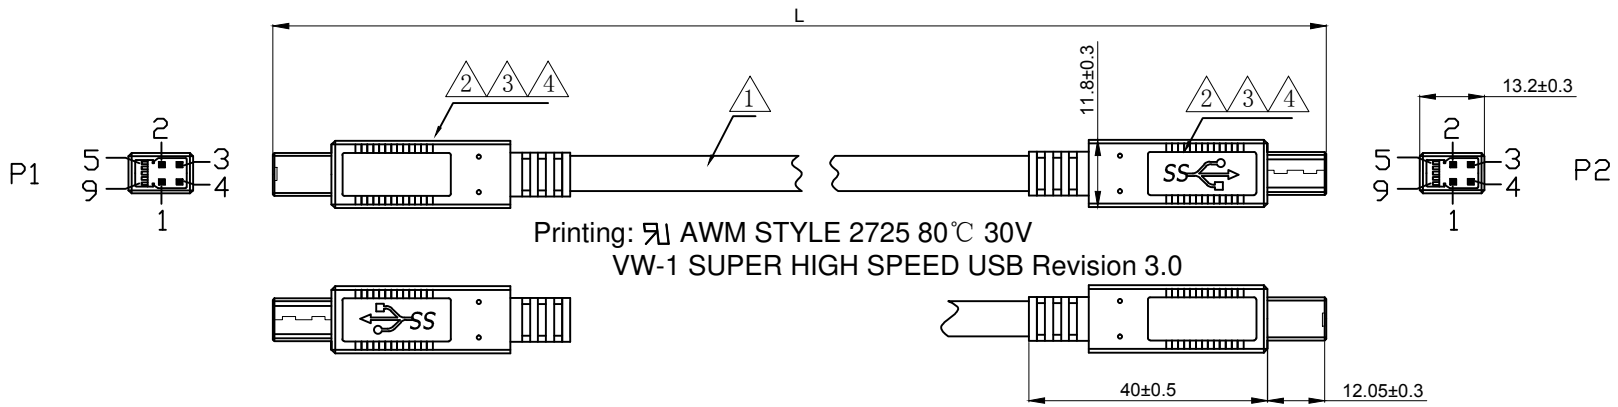
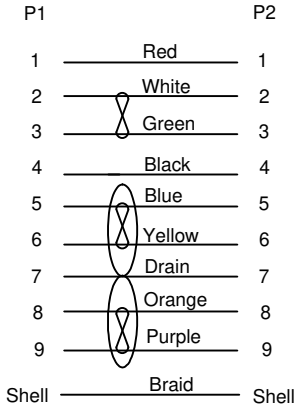



① Pin Assignment




NOTES:

1. Cable Must Be Open, Short, Miswire 100% Test
2. Voltage: 300V DC
3. Contact Resistance: 5ohms max.
4. Insulation Resistance: 10M ohms min.
5. 1Pcs/PE Bag

② 

| WSW P/N | Length(mm) | Qty/Per Carton |
|---|---|---|
| A-USB30BM-30BM-050 | 500±20 | 200 |
| A-USB30BM-30BM-100 | 1000±30 | 150 |
| A-USB30BM-30BM-200 | 2000±50 | 100 |
| A-USB30BM-30BM-300 | 3000±50 | 70 |
| A-USB30BM-30BM-500 | 5000±50 | 50 |

② 

| NO. | TITLE | DESCRIPTION |
|---|---|---|
| 4 | Inner Mold | LDPE WHITE |
| 3 | Over Mold | PVC 45P Black |
| 2 | CONN | USB3.0 B/M, Blue, PIN G/F, Shell Ni-Plated |
| 1 | CABLE | UL2725(Rev 3.0), OD:5.5mm BLACK, (1P#30+D+AL+Mylar)*2C+1P#30+2C#24+AL+B |

RoHS compliant

Unit: mm

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Scale | FREE | | | | | Date | Name | Customer-No. |
| TOLERANCE | | | | | Drawn | 07.01.2019 | Xavier | |
| | | | | | Approved | 11.12.2019 | Winnie | ASSMANN WSW-No. A-USB30BM-30BM-xxx |
| | | ② | Packing quantities & PVC hardness | 10.12.2019 | Winnie | | | |
| DIM | TOL | ① | Add wire color | 07.15.2019 | Xavier | | | Drawing-No. ASS 8455 CA rev02 |
| | | ⓪ | Drawn | 07.01.2019 | Xavier | | | |
| Angle | TOL | Id. | Modification | Date | Name | | | Replace / Sheet 1/1 |

ASSMANN WSW components

CAB0898