
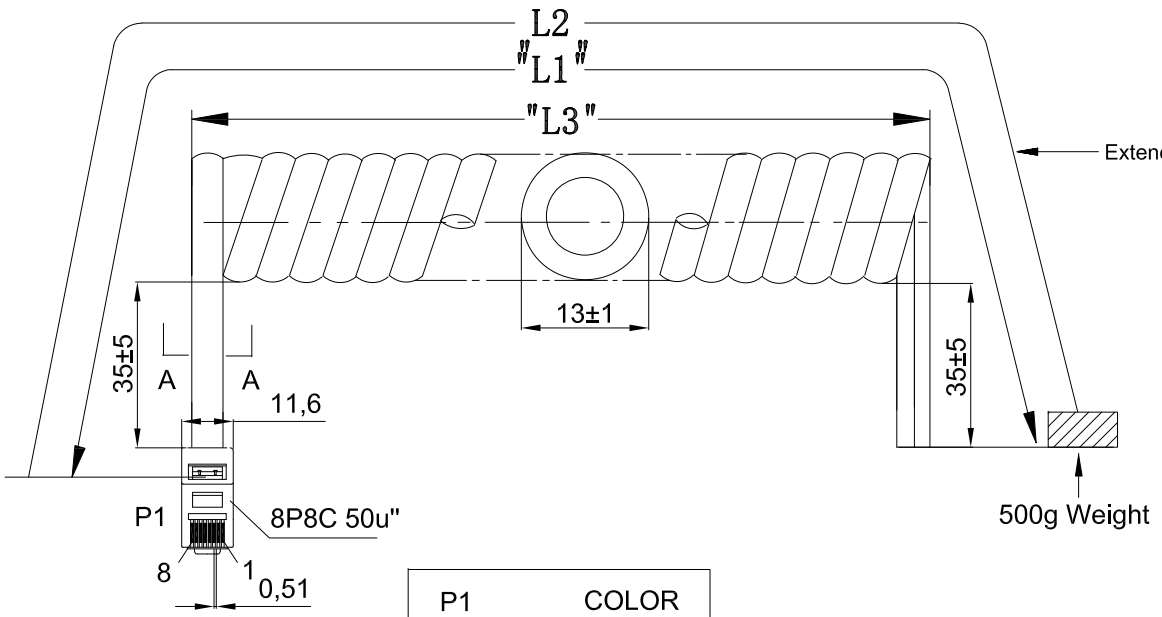


Material:
Plug Housing: Polycarbonate,clear.
Plug Terminal: 0.36[.014] thick phosphor bronze.
Connector: Thick gold in localized gold plate.
Area,Gold flash over the remainder.
Over 2.54mm[.000100] thick nickel underplate.
Conductor: [26AWG(0.12x12) Bare Copper]x8C
Insulation: (PP6331 ID: 0.95-1.0)x8C
Jacket: PVC NOUL 80P
Package: Individual PE Bag.

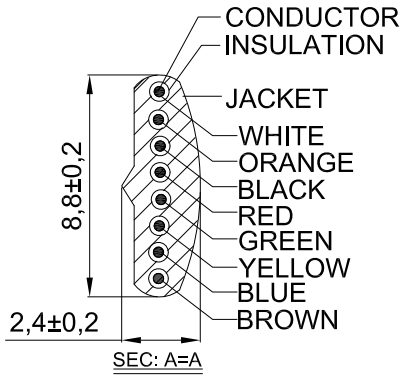

P1	COLOR
1	WHITE
2	ORANGE
3	BLACK
4	RED
5	GREEN
6	YELLOW
7	BLUE
8	BROWN

WSW P/N: AT-C-26-8/8/x-xx-OE

Order color:
B: Black
W: White
S: Silver

Length Code	Retracted Length(L3)	Extended Length(L2)	Cut Length(L1)
5	700±50	5.0FT-5.75FT	2900-3000
7	1000±50	7.0FT-8.05FT	4000-4200
10	1500±50	10.0FT-11.5FT	5900-6100
12	1650±50	12.0FT-13.8FT	7000-7200
14	1900±50	14.0FT-16.1FT	7600-7800
25	3200±50	25.0FT-28.75FT	14300-14500

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	
DIM	TOL
Angle	TOL

Id.	Modification	Date	Name
⓪	Drawn	21.02.2019	Segal

	Date	Name
Drawn	21.02.2019	Segal
Approved	21.02.2019	Segal

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
AT-C-26-8/8/x-xx-OE

Drawing-No.
ASS 8503 CA

rev00

Replace

Sheet