
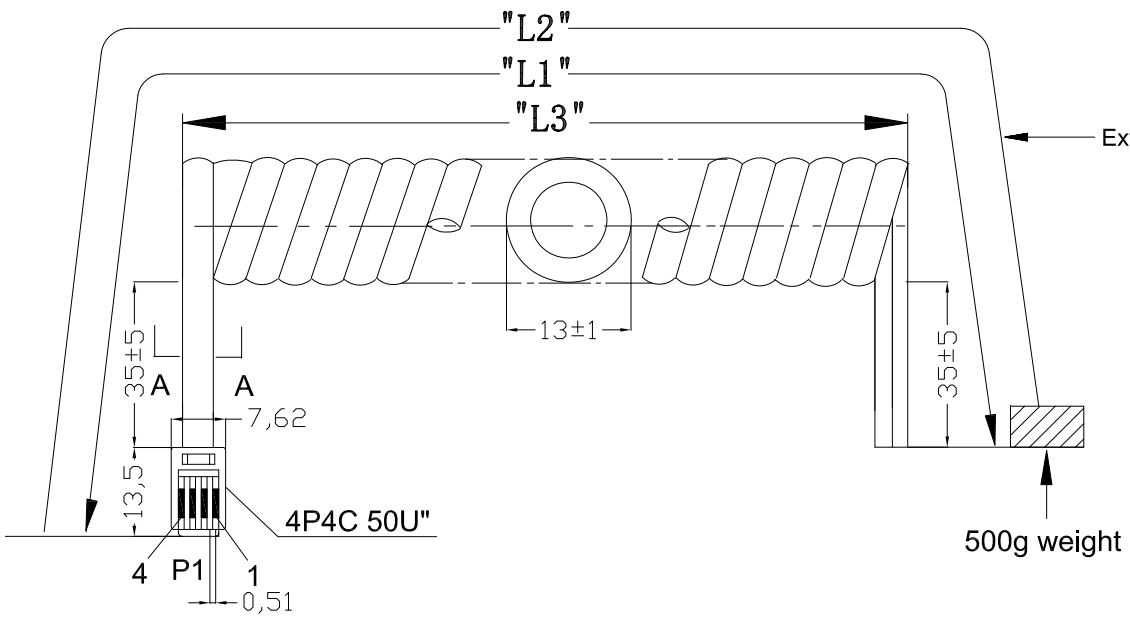


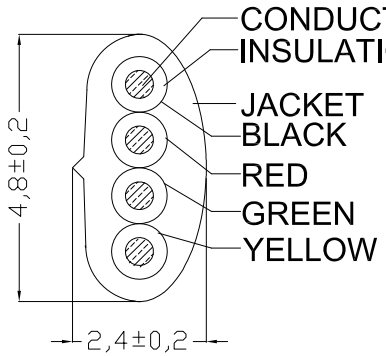

SEC: A-A

TERMINATION:

P1	COLOR
1	BLACK
2	RED
3	GREEN
4	YELLOW

Note for plug:

Material:
Housing-Polycarbonate,clear.
Terminal-0.36[.014] thick phosphor bronze.
Thick gold in localized gold plate.
Area,Gold flash over the remainder.
Over 2.54mm[.000100] thick nickel underplate.
Conductor: [26AWG(0.12x12) BARE COPPER]x4C.
Insulation: (PP6331 ID:0.95-1.0)x4C.
Jacket: PVC NOUL 80P.
Package: Individual PE Bag.

Order code: AT-C-26-4/4/x-xx-OE

Order color:
B: Black
W: White
S: Silver

Length Code	Retracted Length(L3)	Extended Length(L2)	Cut Length(L1)
5	330±30	5.0FT-5.75FT	2300-2400
7	470±30	7.0FT-8.05FT	3000-3200
10	630±50	10.0FT-11.5FT	4300-4500
12	800±50	12.0FT-13.8FT	5200-5400
14	850±50	14.0FT-16.1FT	5800-6000
25	1900±50	25.0FT-28.75FT	10800-11000

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	
.x	±0.50
.xx	±0.20
DIM	TOL
Angle	±2°

Id.	Modification	Date	Name
0	Drawn	25.06.2019	Segal

	Date	Name
Drawn	25.06.2019	Segal
Approved	25.06.2019	Segal

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
AT-C-26-4/4/x-xx-OE

Drawing-No.
ASS 8564 CA

rev00

Replace