



REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	RELEASE	26JUN15	JAH	
A2	-	REVISED COLOR AND IP RATING	20NOV2020	JAH	DH







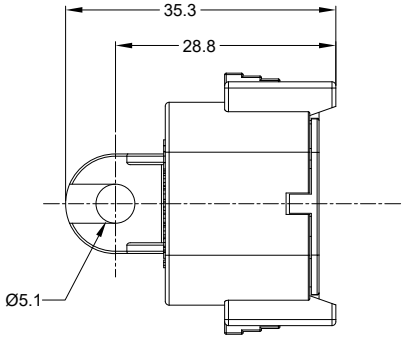




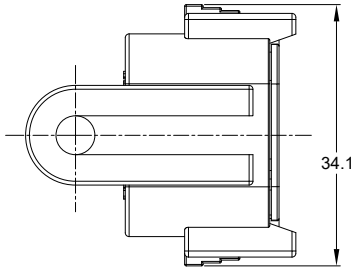






KEY-B CONFIGURATION
P/N ATM06-08SB-CAP
INSERT COLOR: BLACK



KEY-C CONFIGURATION
P/N ATM06-08SC-CAP
INSERT COLOR: GREEN



KEY-D CONFIGURATION
P/N ATM06-08SD-CAP
INSERT COLOR: BROWN

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL: THERMOPLASTIC, HOUSING COLOR: GREY
   INSERT COLOR: PER KEY CONFIGURATION
2. RoHS COMPLIANT
3. MOISTURE RESISTANCE: IP68 (1M OF WATER FOR
   A PERIOD OF 24 HOURS , MATED CONDITION)
4. TEMPERATURE RANGE: -55C~125C
5. USE WITH CONNECTORS ATM06-08SX*
   (X = A,B,C,D KEYS; * = MODIFICATIONS AND/OR COLORS)
6. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

	SEE KEY OPTIONS		
	PART NUMBER	DESCRIPTION	ITEM
QUANTITY	MATERIALS LIST		

UNLESS OTHERWISE SPECIFIED
1) All dimensions are in metric(mm).
2) Tolerances are as follows:
1 PL DEC ±0.30 | Fractions ±1/64
2 PL DEC ±0.15 | Angles ±1°
3 PL DEC ±0.08
3) Note reference = X

MATERIAL SPECIFICATIONS:

PROCESS SPECIFICATIONS:

NEXT ASSY:

SIGNATURES		DATE
DRAWN:	J. HEAD	23JUN2015
CHECKED:		
ENGINEER:		
APPROVAL:		
CUSTOMER:		

THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.

Amphenol

Sine Systems - www.amphenol-sine.com
44724 Morley Drive
Clinton Township, MI 48036

PROTECTIVE CAP, 8 POSITION, ATM-SERIES

SIZE	TYPE	DWG NO:	REVISION
B	C-	ATM06-08SX-CAP	A2

SCALE: NONE SHEET 1 OF 1

TITLE: PROTECTIVE CAP, 8 POSITION, ATM-SERIES
DWG NO: ATM06-08SX-CAP
REV: A2
SH: 1
OF: 1