AT Series
Fixed Attenuators Up to 2W Power




♦ Features

1. SMA, N, BNC, TNC, connector types are available.
2. Excellent high frequency characteristics
3. Stable performance under the conditions of vibration and changes in temperature and humidity
4. Wide varieties of attenuation levels from 0.5-30dB
5. Conforming to MIL standard
6. RoHS compliant


♦ Dimensions

SMA Type
(Plug - Jack)
AT-100V




*() indicates dimension for AT-130V.


N Type
AT-400

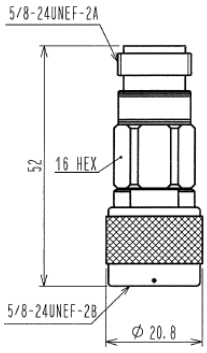

BNC Type
AT-500

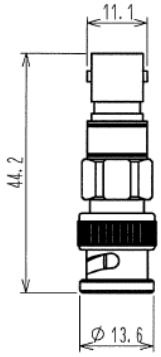

TNC Type
AT-600



All dimensions are in millimeters.

♦ Wide Varieties

Plug - Jack

Series (CL354)	Connector	Frequency (GHz)	Power (W) (at 25°C)	Attenuation (dB)
AT-100V	SMA	DC-18	2	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 20, 30
AT-400	N	DC-13	2	0.5, 1, 2, 3, 5, 6, 10, 13, 20, 30
AT-500	BNC	DC-4	2	1, 2, 3, 5, 6, 9, 10, 14, 20
AT-600	TNC	DC-6	2	1, 3, 4, 6, 7, 10, 20

Plug – Plug

AT-200	SMA	DC-18	2	3, 6, 10, 20

Jack – Jack

AT-300	SMA	DC-18	2	3, 6, 10, 20

Specifications herein are subject to change without notice. Contact Hirose for the latest specifications, drawings and availabilities.

HIROSE ELECTRIC CO.,LTD.
Issued: Jun. 15 , 2016

© 2016 HIROSE ELECTRIC CO., LTD. All rights reserved.