
AUIRGP4062D1
AUIRGP4062D1-E

INSULATED GATE BIPOLAR TRANSISTOR WITH ULTRAFAST SOFT RECOVERY DIODE



n-channel

V_{CES} = 600V

$I_{C(Nominal)}$ = 24A

$t_{SC} \geq 5\mu s$, $T_{J(max)}$ = 175°C

$V_{CE(on)}$ typ. = 1.57V

Features


- Low $V_{CE\ (on)}$ Trench IGBT Technology
- Low Switching Losses
- 5µs SCSOA
- Square RBSOA
- 100% of The Parts Tested for I_{LM}①
- Positive $V_{CE\ (on)}$ Temperature Coefficient.
- Ultra Fast Soft Recovery Co-pak Diode
- Lead-Free, RoHS Compliant
- Automotive Qualified *

Benefits


- High Efficiency in a Wide Range of Applications
- Suitable for a Wide Range of Switching Frequencies due to Low $V_{CE\ (ON)}$ and Low Switching Losses
- Rugged Transient Performance for Increased Reliability
- Excellent Current Sharing in Parallel Operation
- Low EMI

Applications

- Air Conditioning Compressor
- EV Inverter
- Battery charger
- DC-DC converter



TO-247AC
AUIRGP4062D1



TO-247AD
AUIRGP4062D1-E

G	C	E
Gate	Collector	Emitter

Ordering Information

Base part number	Package Type	Standard Pack		Complete Part Number
		Form	Quantity	
AUIRGP4062D1	TO-247AC	Tube	25	AUIRGP4062D1
AUIRGP4062D1-E	TO-247AD	Tube	25	AUIRGP4062D1-E

Absolute Maximum Ratings

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only; and functional operation of the device at these or any other condition beyond those indicated in the specifications is not implied.Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions. Ambient temperature (T_A) is 25°C, unless otherwise specified

	Parameter	Max.	Units
V_{CES}	Collector-to-Emitter Voltage	600	V
I_C @ T_C = 25°C	Continuous Collector Current	55	A
I_C @ T_C = 100°C	Continuous Collector Current	36	
$I_{NOMINAL}$	Nominal Current	24	
I_{CM}	Pulse Collector Current, V_{GE} = 15V	72	
I_{LM}	Clamped Inductive Load Current, V_{GE} = 20V ①	96	
I_F @ T_C = 25°C	Diode Continous Forward Current	55	
I_F @ T_C = 100°C	Diode Continous Forward Current	36	
I_{FM}	Diode Maximum Forward Current ②	96	
V_{GE}	Continuous Gate-to-Emitter Voltage	±20	V
	Transient Gate-to-Emitter Voltage	±30	
P_D @ T_C = 25°C	Maximum Power Dissipation	217	W
P_D @ T_C = 100°C	Maximum Power Dissipation	109	
T_J T_{STG}	Operating Junction and Storage Temperature Range	-55 to +175	°C
	Soldering Temperature, for 10 sec. (1.6mm from case)	300	
	Mounting Torque, 6-32 or M3 Screw	10 lbf·in (1.1N·m)	

Thermal Resistance

	Parameter	Min.	Typ.	Max.	Units
$R_{\theta JC}$ (IGBT)	Thermal Resistance Junction-to-Case (IGBT)③	–––	–––	0.69	°C/W
$R_{\theta JC}$ (Diode)	Thermal Resistance Junction-to-Case (Diode)③	–––	–––	1.2	
$R_{\theta CS}$	Thermal Resistance, Case-to-Sink (flat, greased surface)	–––	0.24	–––	
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	–––	40	–––	

*Qualification standards can be found at http://www.irf.com/

 © 2013 International Rectifier

Electrical Characteristics @ T_J = 25°C (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(BR)CES}$	Collector-to-Emitter Breakdown Voltage	600	—	—	V	V_{GE} = 0V, I_C = 100µA ④
$\Delta V_{(BR)CES}/\Delta T_J$	Temperature Coeff. of Breakdown Voltage	—	0.3	—	V/°C	V_{GE} = 0V, I_C = 10mA (25°C-175°C)
$V_{CE(on)}$	Collector-to-Emitter Saturation Voltage	—	1.57	1.77	V	I_C = 24A, V_{GE} = 15V, T_J = 25°C
		—	1.87	—		I_C = 24A, V_{GE} = 15V, T_J = 150°C
		—	1.94	—		I_C = 24A, V_{GE} = 15V, T_J = 175°C
$V_{GE(th)}$	Gate Threshold Voltage	4.0	—	6.5	V	V_{CE} = V_{GE}, I_C = 700µA
$\Delta V_{GE(th)}/\Delta TJ$	Threshold Voltage temp. coefficient	—	-17	—	mV/°C	V_{CE} = V_{GE}, I_C = 1.0mA (25°C - 175°C)
gfe	Forward Transconductance	—	12	—	S	V_{CE} = 50V, I_C = 24A, PW = 20µs
I_{CES}	Collector-to-Emitter Leakage Current	—	1.0	25	µA	V_{GE} = 0V, V_{CE} = 600V
		—	3.5	—	mA	V_{GE} = 0V, V_{CE} = 600V, T_J = 175°C
V_{FM}	Diode Forward Voltage Drop	—	1.57	—	V	I_F = 24A
		—	1.40	—		I_F = 19A
		—	1.47	—		I_F = 24A, T_J = 175°C
I_{GES}	Gate-to-Emitter Leakage Current	—	—	±100	nA	V_{GE} = ±20V

Switching Characteristics @ T_J = 25°C (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
Q_g	Total Gate Charge (turn-on)	—	51	77	nC	I_C = 24A
Q_{ge}	Gate-to-Emitter Charge (turn-on)	—	14	21		V_{GE} = 15V
Q_{gc}	Gate-to-Collector Charge (turn-on)	—	21	32		V_{CC} = 400V
E_{on}	Turn-On Switching Loss	—	532	754	µJ	I_C = 24A, V_{CC} = 400V, V_{GE} = 15V
E_{off}	Turn-Off Switching Loss	—	311	526		R_G = 10Ω, L = 210µH, T_J = 25°C
E_{total}	Total Switching Loss	—	843	1280		Energy losses include tail & diode reverse recovery
$t_{d(on)}$	Turn-On delay time	—	19	36	ns	I_C = 24A, V_{CC} = 400V, V_{GE} = 15V
t_r	Rise time	—	24	41		R_G = 10Ω, L = 210µH, T_J = 25°C
$t_{d(off)}$	Turn-Off delay time	—	90	109		
t_f	Fall time	—	23	40		
E_{on}	Turn-On Switching Loss	—	726	—	µJ	I_C = 24A, V_{CC} = 400V, V_{GE}=15V
E_{off}	Turn-Off Switching Loss	—	549	—		R_G=10Ω, L= 210µH,T_J = 175°C ④
E_{total}	Total Switching Loss	—	1275	—		Energy losses include tail & diode reverse recovery
$t_{d(on)}$	Turn-On delay time	—	12	—	ns	I_C = 24A, V_{CC} = 400V, V_{GE} = 15V
t_r	Rise time	—	23	—		R_G = 10Ω, L = 200µH, L_S = 150nH
$t_{d(off)}$	Turn-Off delay time	—	92	—		T_J = 175°C
t_f	Fall time	—	84	—		
C_{ies}	Input Capacitance	—	1487	—	pF	V_{GE} = 0V
C_{oes}	Output Capacitance	—	118	—		V_{CC} = 30V
C_{res}	Reverse Transfer Capacitance	—	44	—		f = 1.0Mhz
RBSOA	Reverse Bias Safe Operating Area	FULL SQUARE				T_J = 175°C, I_C = 96A V_{CC} = 480V, Vp ≤ 600V Rg = 10Ω, V_{GE} = +20V to 0V
SCSOA	Short Circuit Safe Operating Area	5	—	—	µs	V_{CC} = 400V, Vp ≤ 600V Rg = 10Ω, V_{GE} = +15V to 0V
Erec	Reverse Recovery Energy of the Diode	—	773	—	µJ	T_J = 175°C
t_{rr}	Diode Reverse Recovery Time	—	102	—	ns	V_{CC} = 400V, I_F = 24A
I_{rr}	Peak Reverse Recovery Current	—	32	—	A	V_{GE} = 15V, Rg = 10Ω, L =210µH

Notes:

① V_{CC} = 80% (V_{CES}), V_{GE} = 20V, L = 210µH, R_G = 50Ω.
② Pulse width limited by max. junction temperature.
③ R_θ is measured at T_J of approximately 90°C.
④ Maximum limits are based on statistical sample size characterization.

 © 2013 International Rectifier

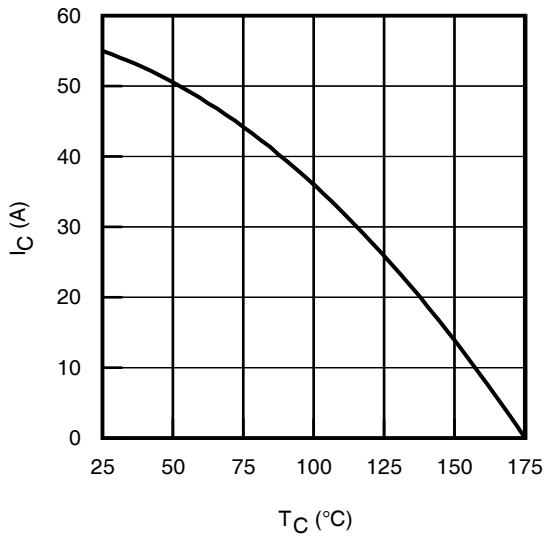


Fig. 1 - Maximum DC Collector Current vs. Case Temperature

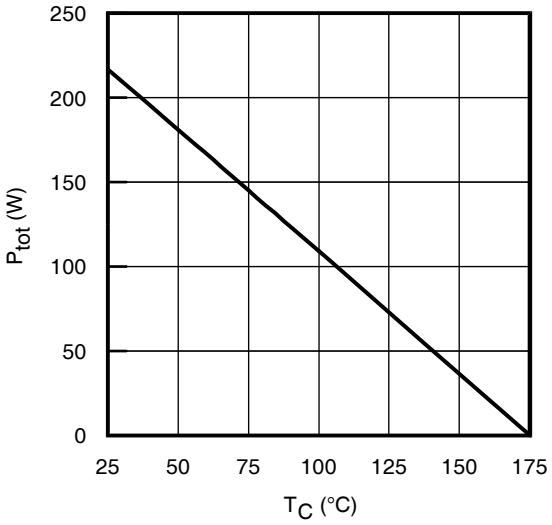


Fig. 2 - Power Dissipation vs. Case Temperature

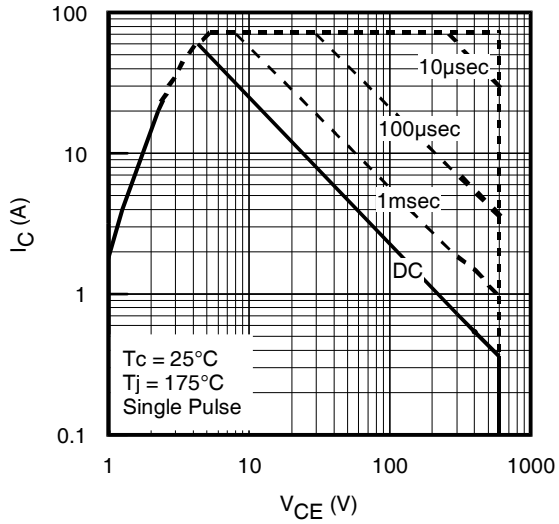


Fig. 3 - Forward SOA
$T_C = 25°C$, $T_J \leq 175°C$; $V_{GE} = 15V$

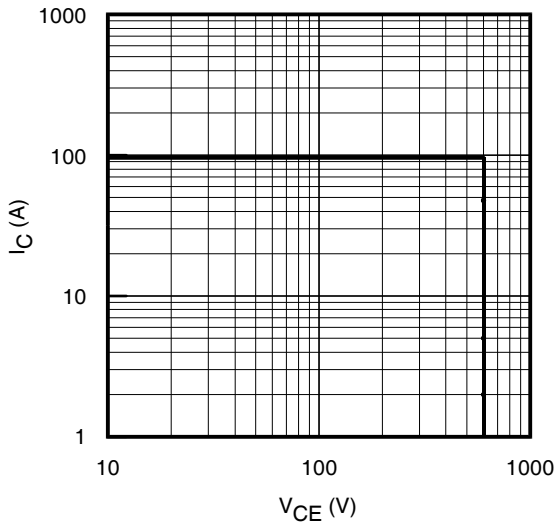


Fig. 4 - Reverse Bias SOA
$T_J = 175°C$; $V_{GE} = 20V$

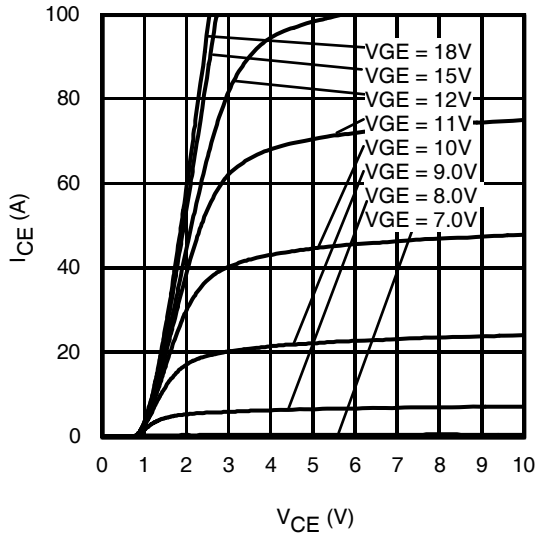


Fig. 5 - Typ. IGBT Output Characteristics
$T_J = -40°C$; tp = 20µs

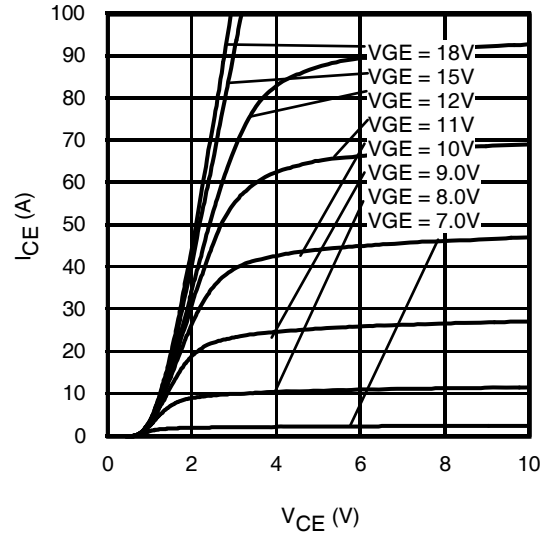


Fig. 6 - Typ. IGBT Output Characteristics
$T_J = 25°C$; tp = 20µs

 © 2013 International Rectifier

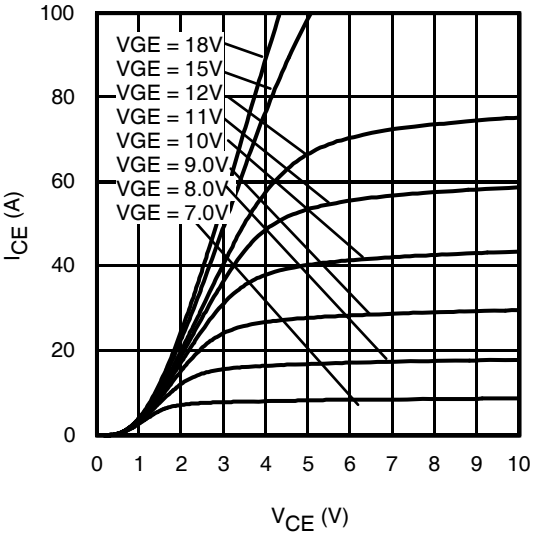


Fig. 7 - Typ. IGBT Output Characteristics
T_J = 175°C; tp = 20µs

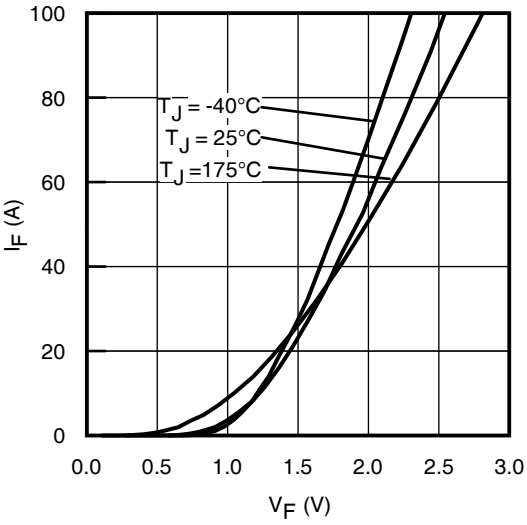


Fig. 8 - Typ. Diode Forward Characteristics
tp = 20µs

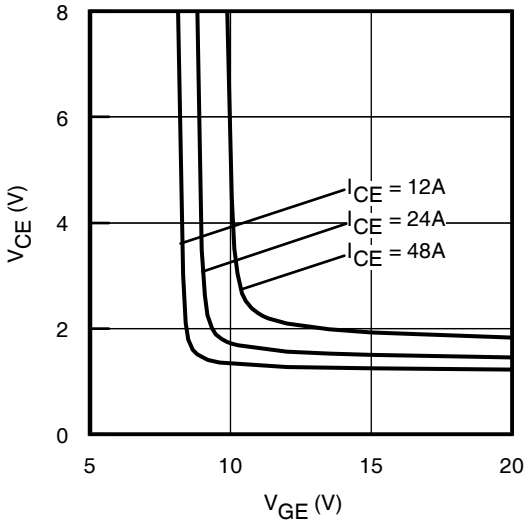


Fig. 9 - Typical V_{CE} vs. V_{GE}
T_J = -40°C

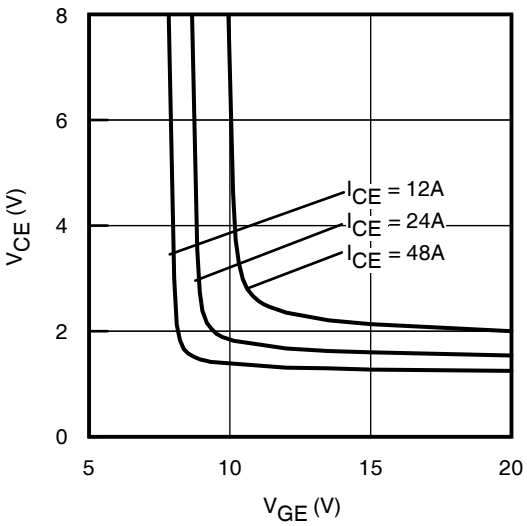


Fig. 10 - Typical V_{CE} vs. V_{GE}
T_J = 25°C

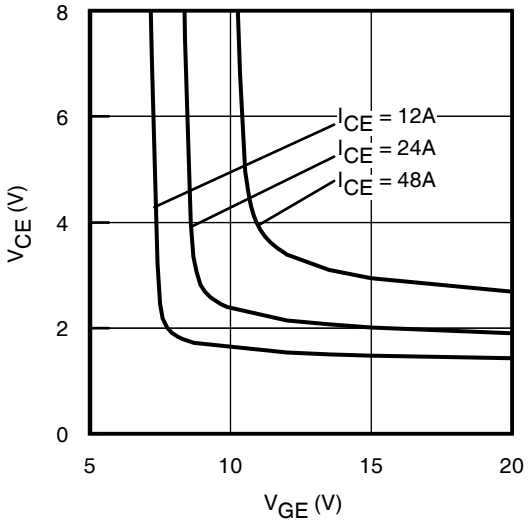


Fig. 11 - Typical V_{CE} vs. V_{GE}
T_J = 175°C

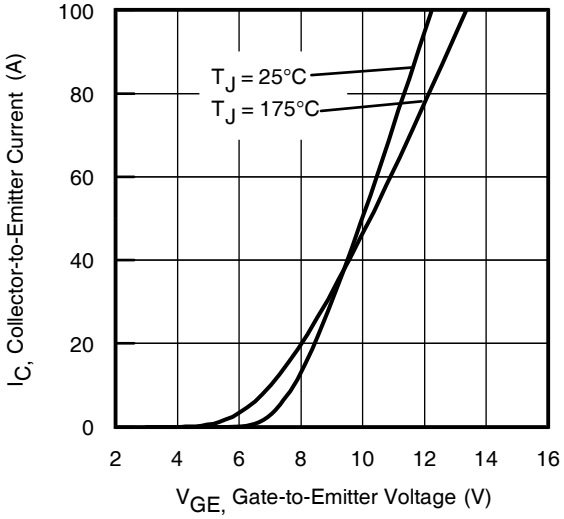


Fig. 12 - Typ. Transfer Characteristics
V_{CE} = 50V; tp = 20µs

 © 2013 International Rectifier

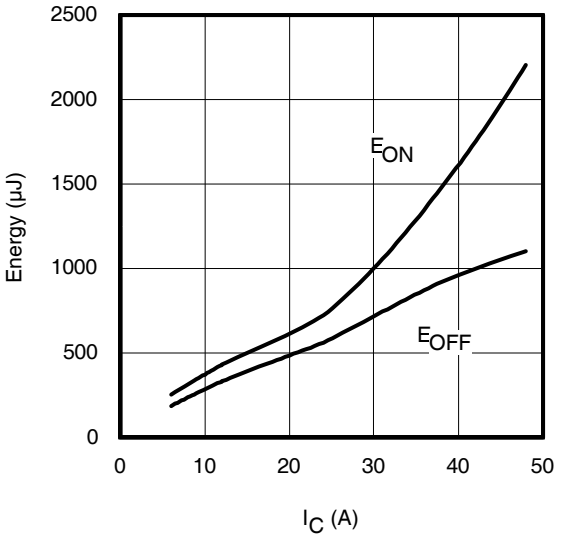


Fig. 13 - Typ. Energy Loss vs. I_C
$T_J = 175°C$; $L = 210µH$; $V_{CE} = 400V$, $R_G = 10Ω$; $V_{GE} = 15V$

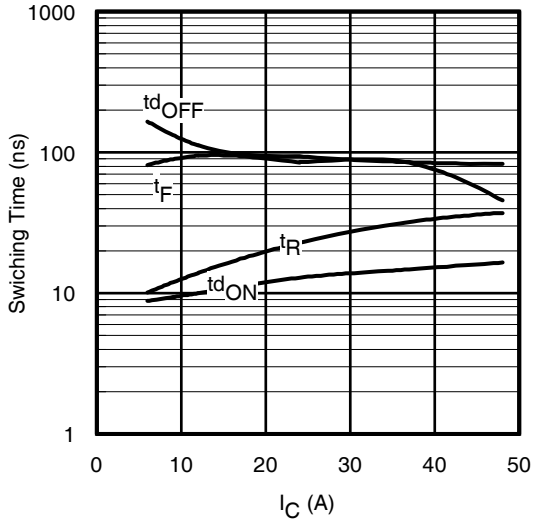


Fig. 14 - Typ. Switching Time vs. I_C
$T_J = 175°C$; $L = 210µH$; $V_{CE} = 400V$, $R_G = 10Ω$; $V_{GE} = 15V$

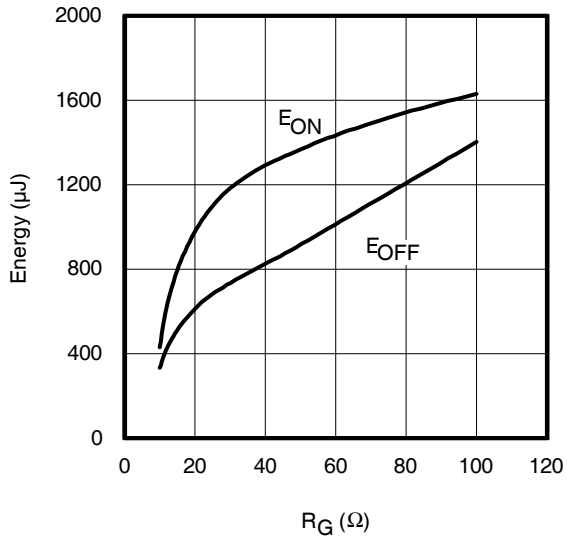


Fig. 15 - Typ. Energy Loss vs. R_G
$T_J = 175°C$; $L = 210µH$; $V_{CE} = 400V$, $I_{CE} = 24A$; $V_{GE} = 15V$

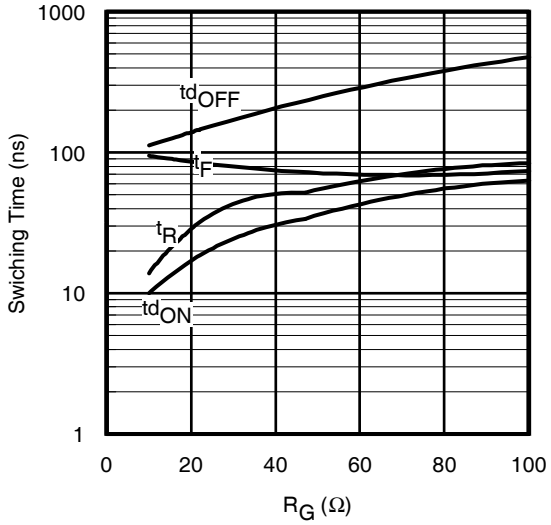


Fig. 16 - Typ. Switching Time vs. R_G
$T_J = 175°C$; $L = 210µH$; $V_{CE} = 400V$, $I_{CE} = 24A$; $V_{GE} = 15V$

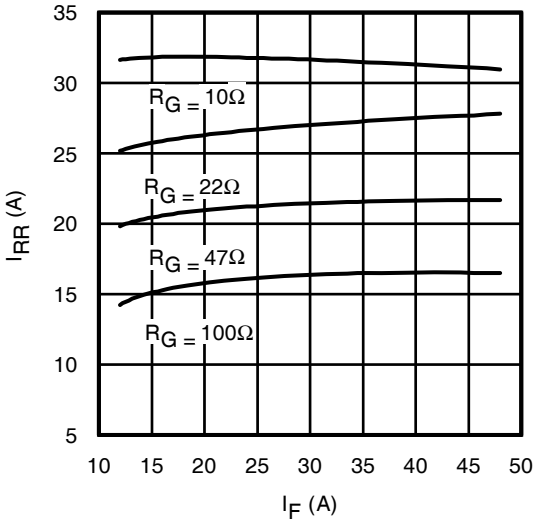


Fig. 17 - Typ. Diode I_{RR} vs. I_F
$T_J = 175°C$

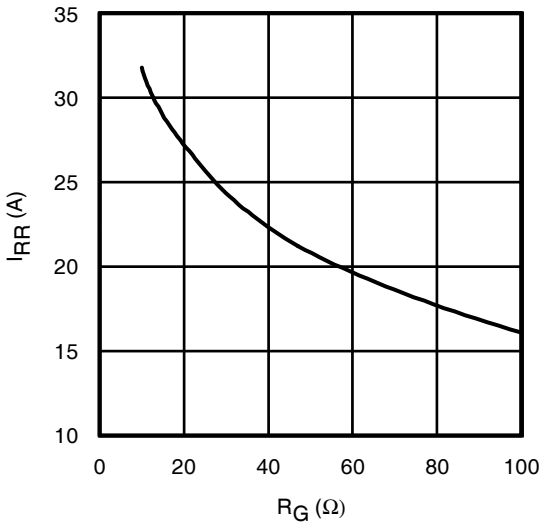


Fig. 18 - Typ. Diode I_{RR} vs. R_G
$T_J = 175°C$

 © 2013 International Rectifier

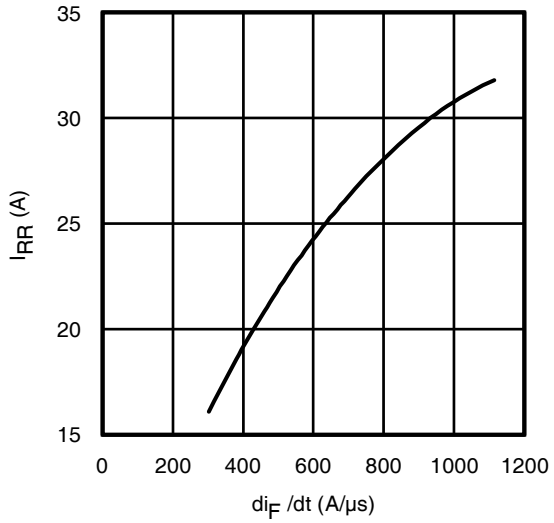


Fig. 19 - Typ. Diode I_{RR} vs. di_F/dt
V_{CC} = 400V; V_{GE} = 15V; I_F = 24A; T_J = 175°C

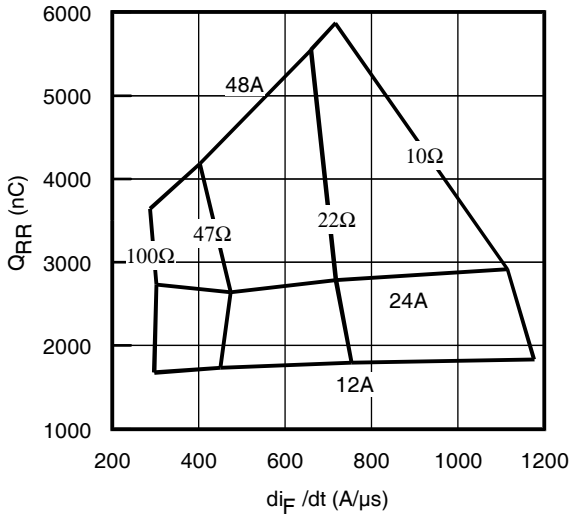


Fig. 20 - Typ. Diode Q_{RR} vs. di_F/dt
V_{CC} = 400V; V_{GE} = 15V; T_J = 175°C

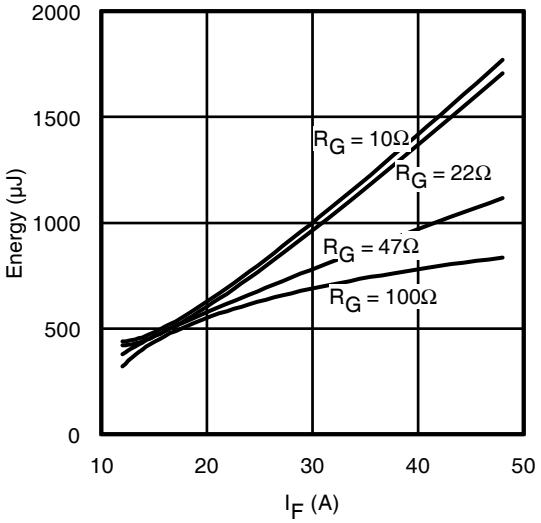


Fig. 21 - Typ. Diode E_{RR} vs. I_F
T_J = 175°C

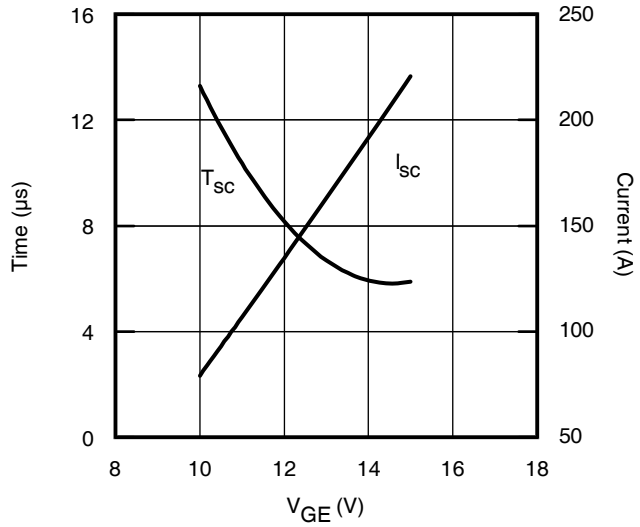


Fig. 22 - V_{GE} vs. Short Circuit Time
V_{CC} = 400V; T_C = 25°C

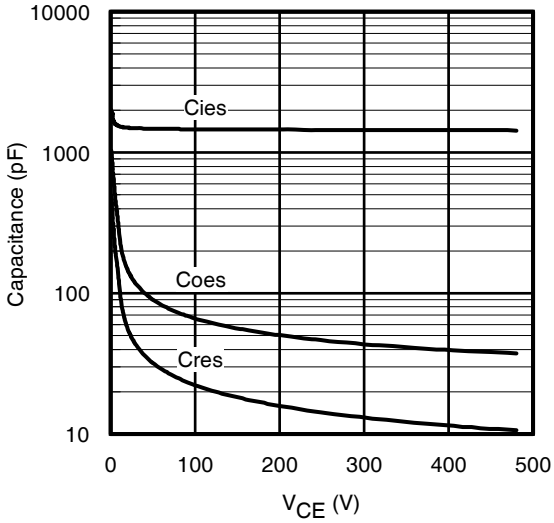


Fig. 23 - Typ. Capacitance vs. V_{CE}
V_{GE}= 0V; f = 1MHz


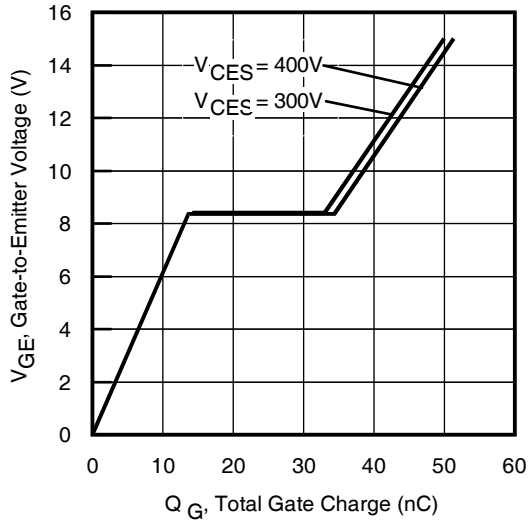


Fig. 24 - Typical Gate Charge vs. V_{GE}
I_{CE} = 24A; L = 585µH

 © 2013 International Rectifier

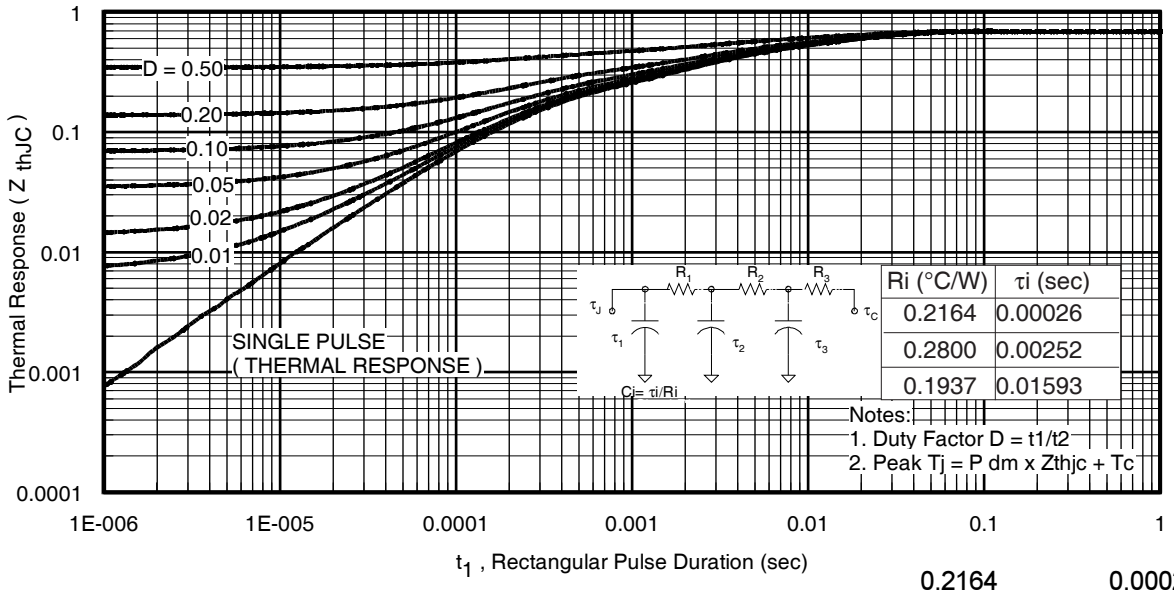

0.2164 0.00026
0.2800 0.00252
0.1937 0.01593

Fig 25. Maximum Transient Thermal Impedance, Junction-to-Case (IGBT)

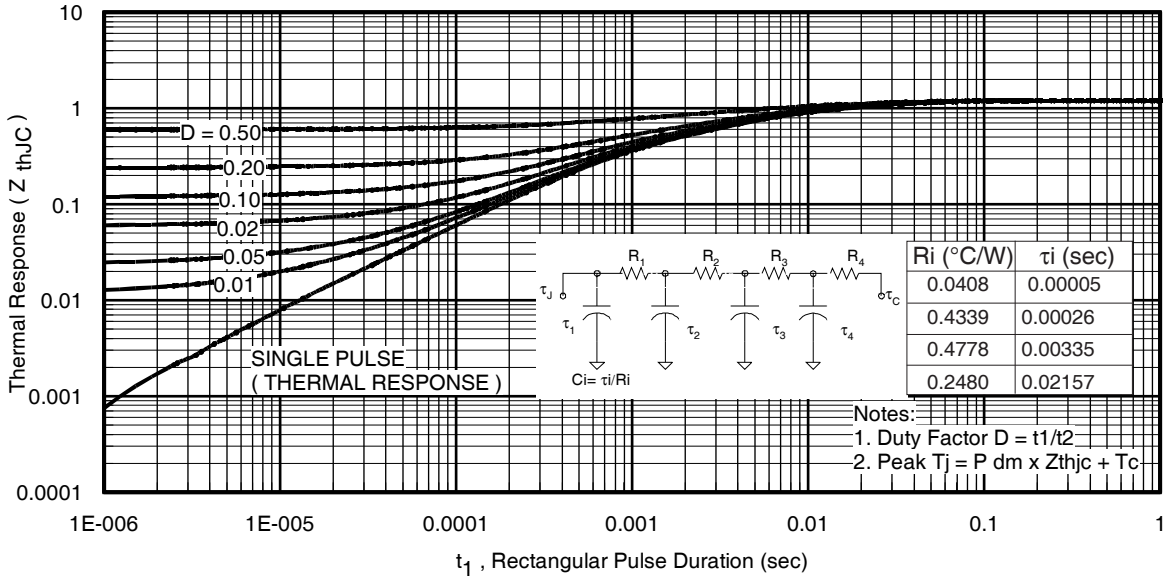


Fig. 26. Maximum Transient Thermal Impedance, Junction-to-Case (DIODE)

 © 2013 International Rectifier

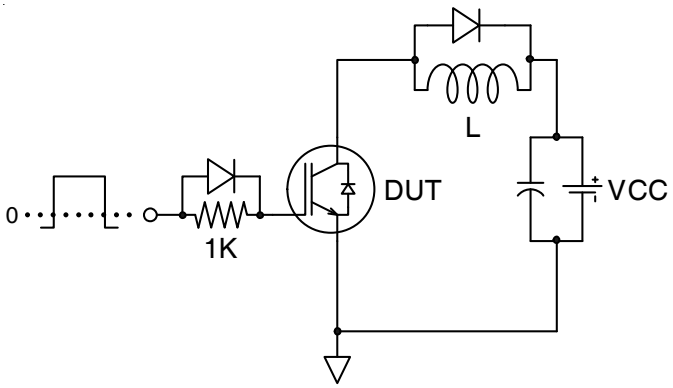


Fig.C.T.1 - Gate Charge Circuit (turn-off)


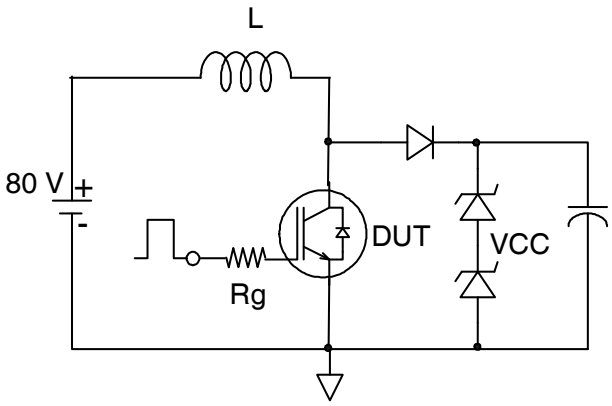


Fig.C.T.2 - RBSOA Circuit

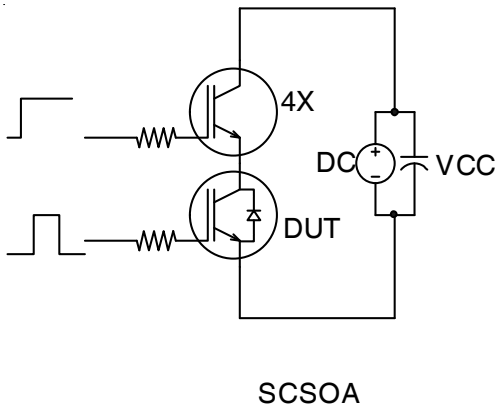

SCSOA

Fig.C.T.3 - S.C. SOA Circuit

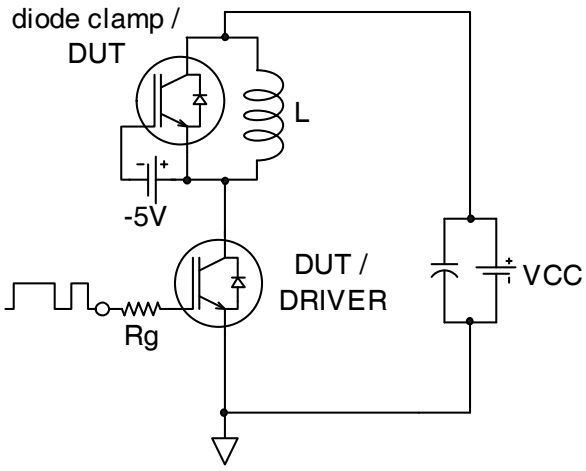


Fig.C.T.4 - Switching Loss Circuit

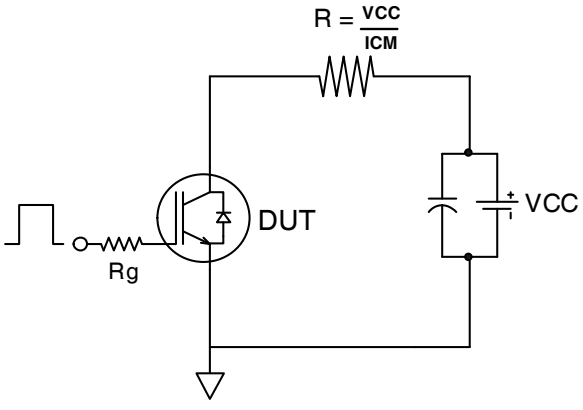


Fig.C.T.5 - Resistive Load Circuit

 © 2013 International Rectifier

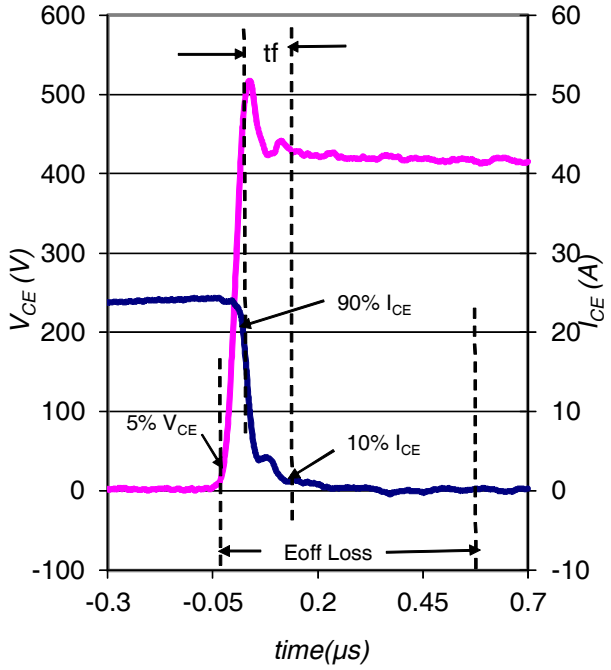


Fig. WF1 - Typ. Turn-off Loss Waveform
@ T_J = 175°C using Fig. CT.4

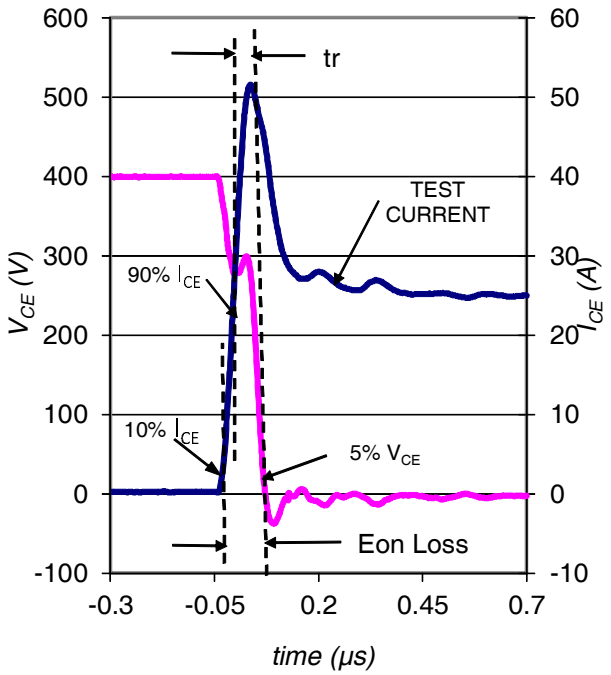


Fig. WF2 - Typ. Turn-on Loss Waveform
@ T_J = 175°C using Fig. CT.4

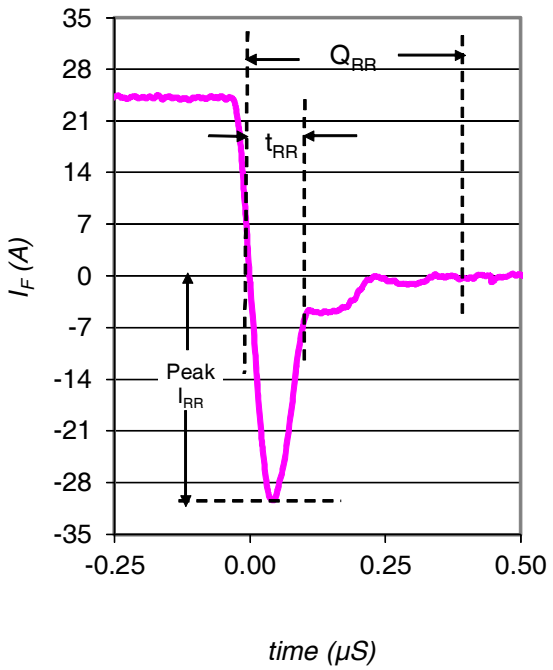


Fig. WF3 - Typ. Diode Recovery Waveform
@ T_J = 175°C using Fig. CT.4


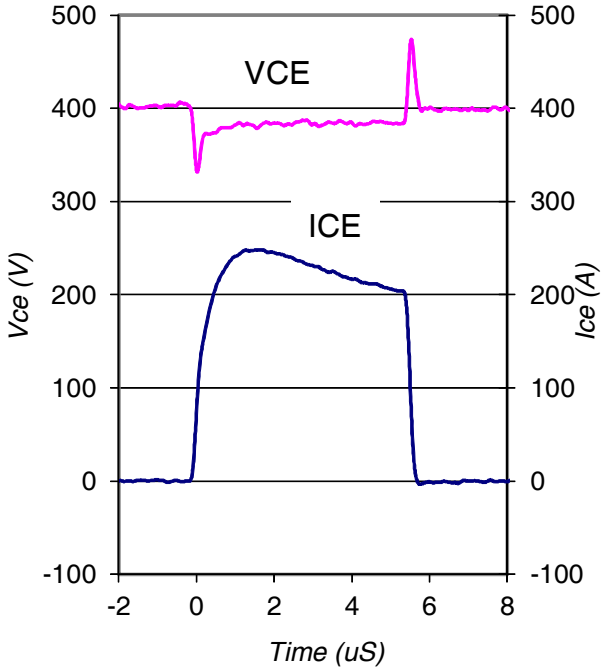



Fig. WF4 - Typ. S.C. Waveform
@ T_J = 25°C using Fig. CT.3


 © 2013 International Rectifier


TO-247AC Package Outline

Dimensions are shown in millimeters (inches)

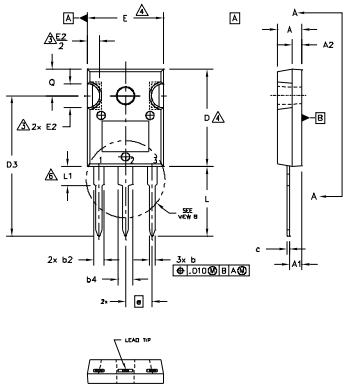







NOTES:

1. DIMENSIONING AND TOLERANCING AS PER ASME Y14.5M 1994.
2. DIMENSIONS ARE SHOWN IN INCHES.
3. CONTOUR OF SLOT OPTIONAL.
4. DIMENSION D & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED .005" (0.127) PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY.
5. THERMAL PAD CONTOUR OPTIONAL WITHIN DIMENSIONS D1 & E1.
6. LEAD FINISH UNCONTROLLED IN L1.
7. øP TO HAVE A MAXIMUM DRAFT ANGLE OF 1.5 ° TO THE TOP OF THE PART WITH A MAXIMUM HOLE DIAMETER OF .154 INCH.
8. OUTLINE CONFORMS TO JEDEC OUTLINE TO-247AC .

SYMBOL	DIMENSIONS				NOTES
	INCHES		MILLIMETERS		
	MIN.	MAX.	MIN.	MAX.	
A	.183	.209	4.65	5.31	
A1	.087	.102	2.21	2.59	
A2	.059	.098	1.50	2.49	
b	.039	.055	0.99	1.40	
b1	.039	.053	0.99	1.35	
b2	.065	.094	1.65	2.39	
b3	.065	.092	1.65	2.34	
b4	.102	.135	2.59	3.43	
b5	.102	.133	2.59	3.38	
c	.015	.035	0.38	0.89	
c1	.015	.033	0.38	0.84	
D	.776	.815	19.71	20.70	4
D1	.515	–	13.08	–	5
D2	.020	.053	0.51	1.35	
D3	1.122	1.161	28.50	29.50	
E	.602	.625	15.29	15.87	4
E1	.530	–	13.46	–	
E2	.178	.216	4.52	5.49	
e	.215 BSC		5.46 BSC		
øk	.010		0.25		
L	.559	.634	14.20	16.10	
L1	.146	.169	3.71	4.29	
øP	.140	.144	3.56	3.66	
øP1	–	.291	–	7.39	
Q	.209	.224	5.31	5.69	
S	.217 BSC		5.51 BSC		

SPECIAL NOTE:

a) ADDED D3 FOR SPECIAL REQUIREMENT

PART NUMBERS AFFECTED:

AUIRG4PH50S
AUIRGP4066D1/E
AUIRGP4063D/E
AUIRGP50B60PD1/E
AUIRGP35B60PD/E
AUIRGP4062D1/E
AUIRGP65A20D0
AUIRGP65G20D0
AUIRGP/F66524D0
AUIRGP/F76524D0
AUIRGP/F66548D0
AUIRGP/F76548D0

LEAD ASSIGNMENTS

HEXFET

1.– GATE
2.– DRAIN
3.– SOURCE
4.– DRAIN


IGBTs, CoPACK

1.– GATE
2.– COLLECTOR
3.– EMITTER
4.– COLLECTOR

DIODES

1.– ANODE/OPEN
2.– CATHODE
3.– ANODE

TO-247AC Part Marking Information

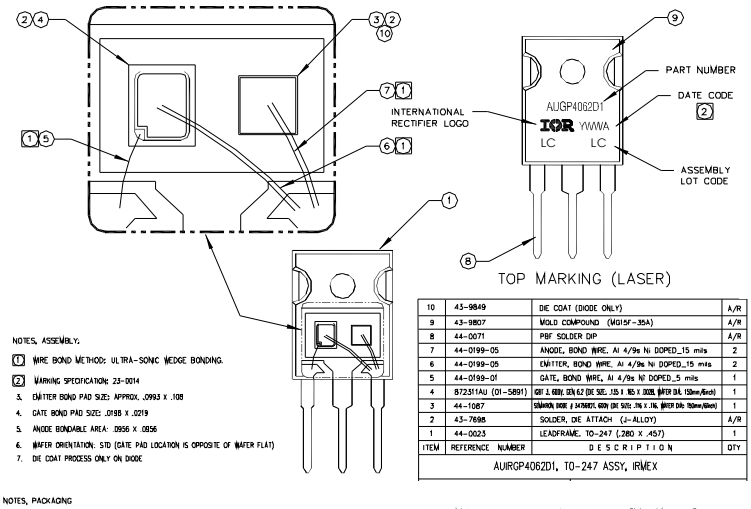

NOTES, ASSEMBLY:

1. WIRE BOND METHOD: ULTRA-SONIC WEDGE BONDING.
2. MARKING SPECIFICATION: 23-0014
3. EMITTER BOND PAD SIZE: APPROX. .0993 X .108
4. GATE BOND PAD SIZE: .0198 X .0219
5. ANODE BONDABLE AREA: .0956 X .0856
6. WAFER ORIENTATION: STD (GATE PAD LOCATION IS OPPOSITE OF WAFER FLAT)
7. DIE COAT PROCESS ONLY ON DIODE

ITEM	REFERENCE NUMBER	DESCRIPTION	QTY
10	43-9849	DIE COAT (DIODE ONLY)	A/R
9	43-9807	MOLD COMPOUND (MG15F-35A)	A/R
8	44-0071	PBF SOLDER DIP	A/R
7	44-0199-05	ANODE, BOND WIRE, Al 4/9s Ni DOPED_15 mils	2
6	44-0199-05	EMITTER, BOND WIRE, Al 4/9s Ni DOPED_15 mils	2
5	44-0199-01	GATE, BOND WIRE, Al 4/9s Ni DOPED_5 mils	1
4	87231AU (01-5891)	IGBT 1.6KV, 62A (DIE SIZE .135 X .165 X .0028, WAFER DIA. 150mm/6inch)	1
3	44-1087	SILICON DIODE 4.3A/600V, 40A (DIE SIZE .216 X .116, WAFER DIA. 150mm/6inch)	1
2	43-7698	SOLDER, DIE ATTACH (Ji-ALLOY)	A/R
1	44-0023	LEADFRAME, TO-247 (.280 X .457)	1

AUIRGP4062D1, TO-247 ASSY, IRMEX

NOTES, PACKAGING

1. TUBE – 25 UNITS/TUBE


ALL DIMENSIONS ARE SHOWN IN INCHES [MILLIMETERS]

Note: For the most current drawing please refer to IR website at http://www.irf.com/package/

 © 2013 International Rectifier

TO-247AD Package Outline

Dimensions are shown in millimeters (inches)

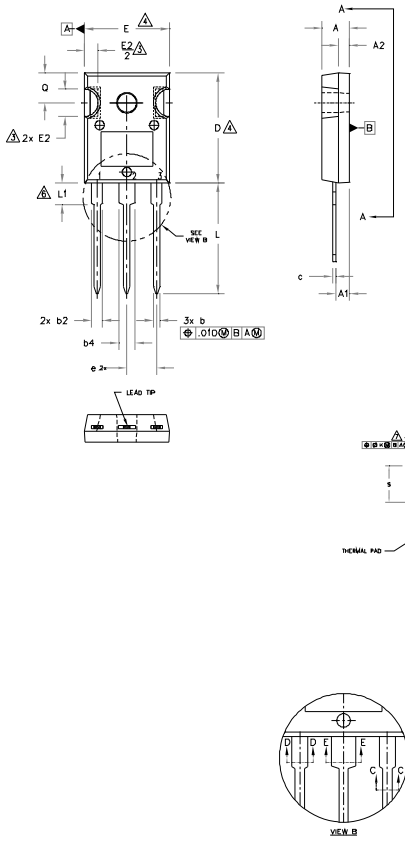

NOTES:

1. DIMENSIONING AND TOLERANCING AS PER ASME Y14.5M 1994.
2. DIMENSIONS ARE SHOWN IN INCHES.
3. CONTOUR OF SLOT OPTIONAL.
4. DIMENSION D & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED .005" (0.127) PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY.
5. THERMAL PAD CONTOUR OPTIONAL WITHIN DIMENSIONS D1 & E1.
6. LEAD FINISH UNCONTROLLED IN L1.
7. øP TO HAVE A MAXIMUM DRAFT ANGLE OF 1.5 ° TO THE TOP OF THE PART WITH A MAXIMUM HOLE DIAMETER OF .154 INCH.
8. OUTLINE CONFORMS TO JEDEC OUTLINE TO-247AD.

SYMBOL	DIMENSIONS				NOTES
	INCHES		MILLIMETERS		
	MIN.	MAX.	MIN.	MAX.	
A	.190	.203	4.83	5.13	
A1	.087	.102	2.21	2.59	
A2	.059	.098	1.50	2.49	
b	.039	.055	0.99	1.40	
b1	.039	.053	0.99	1.35	
b2	.065	.094	1.65	2.39	
b3	.065	.092	1.65	2.34	
b4	.102	.135	2.59	3.43	
b5	.102	.133	2.59	3.38	
c	.015	.035	0.38	0.89	
c1	.015	.033	0.38	0.84	
D	.776	.815	19.71	20.70	4
D1	.515	–	13.08	–	5
D2	.020	.053	0.51	1.35	
E	.602	.625	15.29	15.87	4
E1	.530	–	13.46	–	
E2	.178	.216	4.52	5.49	
e	.215 BSC		5.46 BSC		
øk	.010		0.25		
L	.780	.827	19.57	21.00	
L1	.146	.169	3.71	4.29	
øP	.140	.144	3.56	3.66	
øP1	–	.291	–	7.39	
Q	.209	.224	5.31	5.69	
S	.217 BSC		5.51 BSC		

LEAD ASSIGNMENTS

HEXFET

1.– GATE
2.– DRAIN
3.– SOURCE
4.– DRAIN


IGBTs, CoPACK

1.– GATE
2.– COLLECTOR
3.– EMITTER
4.– COLLECTOR

DIODES

1.– ANODE/OPEN
2.– CATHODE
3.– ANODE

TO-247AD Part Marking Information

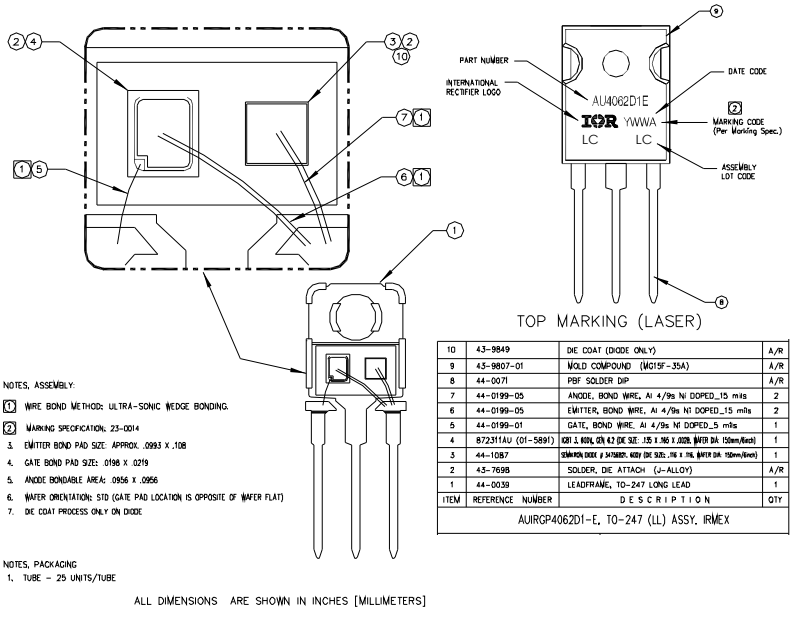

NOTES, ASSEMBLY:

1. WIRE BOND METHOD: ULTRA-SONIC WEDGE BONDING.
2. MARKING SPECIFICATION: 23-0014
3. EMITTER BOND PAD SIZE: APPROX. .0093 X .108
4. GATE BOND PAD SIZE: .0198 X .0219
5. ANODE BONDABLE AREA: .0956 X .0956
6. WAFER ORIENTATION: STD (GATE PAD LOCATION IS OPPOSITE OF WAFER FLAT)
7. DIE COAT PROCESS ONLY ON DIODE

ITEM	REFERENCE NUMBER	DESCRIPTION	QTY
10	43-9849	DIE COAT (DIODE ONLY)	A/R
9	45-9807-01	MOLD COMPOUND (MG15F-35A)	A/R
8	44-0071	PBF SOLDER DIP	A/R
7	44-0199-05	ANODE, BOND WIRE, Al 4/9a Ni DOPED_.15 mils	2
6	44-0199-05	EMITTER, BOND WIRE, Al 4/9a Ni DOPED_.15 mils	2
5	44-0199-01	GATE, BOND WIRE, Al 4/9a Ni DOPED_5 mils	1
4	872311AU (01-5891)	KAT 3, KERF, QTY 42 (DIE SIZE: .135 X .165 X .0028, WAFER DIA 150mm/6inch)	1
3	44-1087	SEMITRON DIODE p SI7585DP, KERF (DIE SIZE: .116 X .176, WAFER DIA 150mm/6inch)	1
2	43-7698	SOLDER, DIE ATTACH (J-ALLOY)	A/R
1	44-0039	LEADFRAME, TO-247 LONG LEAD	1

AUIRGP4062D1-E, TO-247 (LL) ASSY, IRMEX

NOTES, PACKAGING

1. TUBE – 25 UNITS/TUBE

ALL DIMENSIONS ARE SHOWN IN INCHES [MILLIMETERS]

Note: For the most current drawing please refer to IR website at http://www.irf.com/package/

 © 2013 International Rectifier

Qualification Information†

Qualification Level		Automotive (per AEC-Q101) ††	
		Comments: This part number(s) passed Automotive qualification. IR's Industrial and Consumer qualification level is granted by extension of the higher Automotive level.	
Moisture Sensitivity Level		3L-TO-247AC	N/A
		3L-TO-247AD	
ESD	Machine Model	Class M4 (+/- 700V) (per AEC-Q101-002)	
	Human Body Model	Class H1C (+/- 2000V) (per AEC-Q101-001)	
	Charged Device Model	Class C5(+/- 2000V) (per AEC-Q101-005)	
RoHS Compliant		Yes	

† Qualification standards can be found at International Rectifier's web site: http//www.irf.com/

†† Highest passing voltage.

 © 2013 International Rectifier

IMPORTANT NOTICE

Unless specifically designated for the automotive market, International Rectifier Corporation and its subsidiaries (IR) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or services without notice. Part numbers designated with the “AU” prefix follow automotive industry and / or customer specific requirements with regards to product discontinuance and process change notification. All products are sold subject to IR’s terms and conditions of sale supplied at the time of order acknowledgment.

IR warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with IR’s standard warranty. Testing and other quality control techniques are used to the extent IR deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

IR assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using IR components. To minimize the risks with customer products and applications, customers should provide adequate design and operating safeguards.

Reproduction of IR information in IR data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alterations is an unfair and deceptive business practice. IR is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of IR products or serviced with statements different from or beyond the parameters stated by IR for that product or service voids all express and any implied warranties for the associated IR product or service and is an unfair and deceptive business practice. IR is not responsible or liable for any such statements.

IR products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or in other applications intended to support or sustain life, or in any other application in which the failure of the IR product could create a situation where personal injury or death may occur. Should Buyer purchase or use IR products for any such unintended or unauthorized application, Buyer shall indemnify and hold International Rectifier and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that IR was negligent regarding the design or manufacture of the product.

Only products certified as military grade by the Defense Logistics Agency (DLA) of the US Department of Defense, are designed and manufactured to meet DLA military specifications required by certain military, aerospace or other applications. Buyers acknowledge and agree that any use of IR products not certified by DLA as military-grade, in applications requiring military grade products, is solely at the Buyer’s own risk and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

IR products are neither designed nor intended for use in automotive applications or environments unless the specific IR products are designated by IR as compliant with ISO/TS 16949 requirements and bear a part number including the designation “AU”. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, IR will not be responsible for any failure to meet such requirements.

For technical support, please contact IR’s Technical Assistance Center

http://www.irf.com/technical-info/

WORLD HEADQUARTERS:

101 N. Sepulveda Blvd., El Segundo, California 90245

Tel: (310) 252-7105

 © 2013 International Rectifier