2.5 x 2.0mm INDUSTRIAL GRADE CERAMIC RESONATOR



2.5 x 2.0 x 1.0 mm

AWSZT-CW

RoHS/RoHS II compliant
Pb in ceramic, exemption (7c-I)

Moisture Sensitivity Level (MSL) – This product is not Moisture Sensitive - MSL = 1

FEATURES:

- Low resonant impedance
- Built-in load capacitors
- IR reflow capable

APPLICATIONS:

- Remote controls, Microprocessor clocks, Mobile phones, DVD & CD-Roms, Electric appliances
- Consumer electronics

ELECTRICAL CHARACTERISTICS:

Parameters		Minimum	Typical	Maximum	Units	Notes
Frequency Range		20.00		60.00	MHz	
Resonant Impedance (Ro)				60	Ω	20.00 MHz – 25.99 MHz
				50		26.00 MHz – 35.00 MHz
				50		35.01 MHz – 60.00 MHz
Load Capacitance for Test Circuit (C1=C2)		10 – 20%	10	10 + 20%	pF	20.00 MHz – 25.99 MHz
		5 – 20%	5	5 + 20%		26.00 MHz – 35.00 MHz
		5 – 20%	5	5 + 20%		35.01 MHz – 60.00 MHz
Frequency Tolerance @25 ºC		-0.5		0.5	%	
Frequency Stability @ -25ºC to +85ºC		-0.2		0.2	%	
Withstanding Voltage			50		V	DC , 1 min
Rating Voltage	(1) D.C.Voltage			6	V	
	(2) A.C. Voltage			15	Vp-p.	
Insulation Resistance		500			MΩ	10V, 1min
Operation Temperature		-25		85	ºC	
Storage Temperature		-55		85	ºC	
Aging Rate (Fosc) (10 years)		-0.2		0.2	%	

OPTIONS & PART IDENTIFICATION:


AWSZT – XX.XX CW - □

Frequency
Frequency in MHz

Packaging
T: 3000pcs/Reel
Blank: Bulk

TEST CONDITION AND TEST CIRCUIT:

Parts shall be measured under a condition (Temp.: 20±15°C, Humidity: 65±20% R.H.) unless the standard condition (Temp: 25±3°C, Humidity: 65±10% R.H.) is regulated to measure

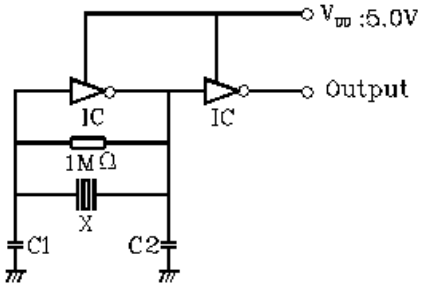

X: Ceramic Resonator
C1=C2: 10pF ±20% (20.00MHz~25.99MHz)
5pF ±20% (26.00MHz~35.00MHz)
5pF ±20% (35.01MHz~60.00MHz)

EOL

30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

2.5 x 2.0mm INDUSTRIAL GRADE CERAMIC RESONATOR




2.5 x 2.0 x 1.0 mm


AWSZT-CW

RoHS/RoHS II compliant
Pb in ceramic, exemption (7c-I)

OUTLINE DRAWING:

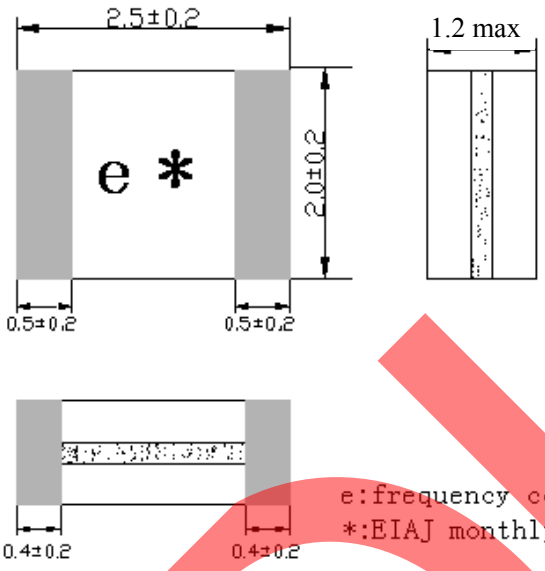


Recommended Land Pattern

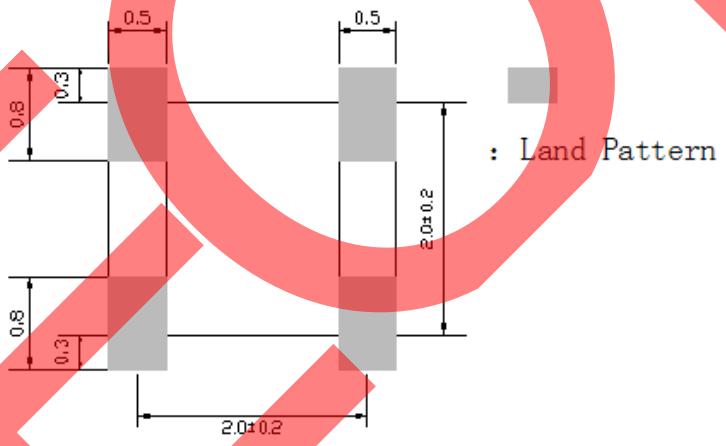

Dimension: mm

REFLOW PROFILE:

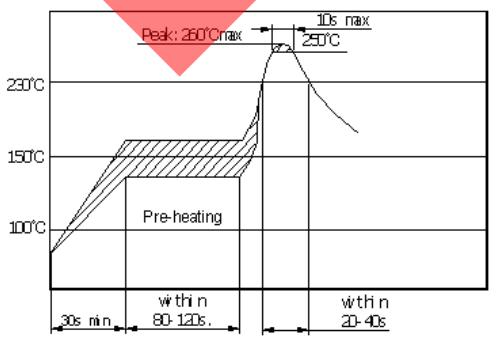

EOL

30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

2.5 x 2.0mm INDUSTRIAL GRADE CERAMIC RESONATOR




2.5 x 2.0 x 1.0 mm

AWSZT-CW


RoHS/RoHS II compliant
Pb in ceramic, exemption (7c-I)


TAPE & REEL:


T: tape and reel (3,000pcs/reel)

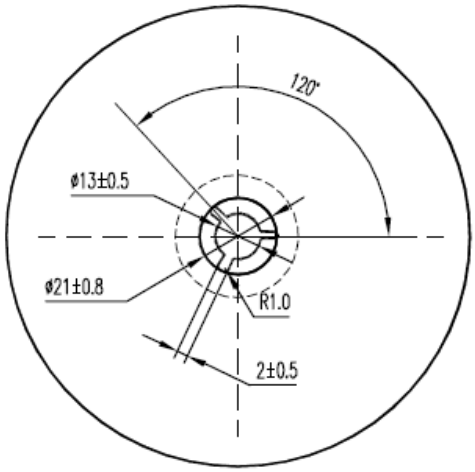

ΦA	ΦB	W	T	Carrier tape size
180±3	60 min.	8.4 min	12.4 max	8

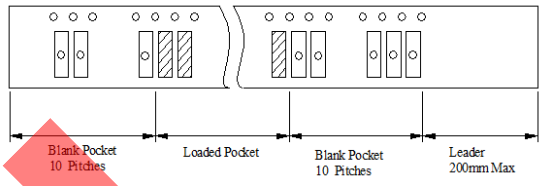

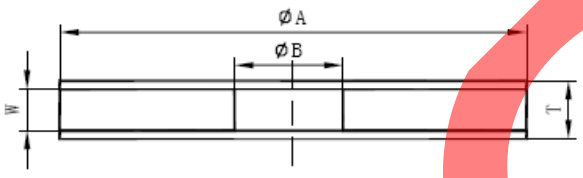

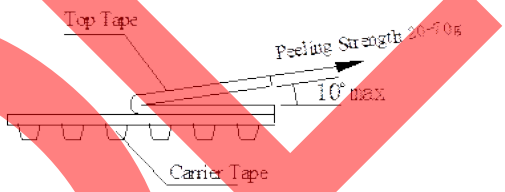

Note: upon opening the original packaging, it is recommended that the product be used within 1 year. If the product will not be used within 1 year, it is recommended that the product be re-sealed in airtight packaging according to MSL 1 requirements to maintain solderability.

Dimension: mm

CAUTION:

(1) Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
(2) This component is not hermetically sealed. Do not clean or wash the component.
(3) Reflow Soldering: Do not use strong acidity flux, such as flux with chlorine content of greater than 0.2wt% during Reflow Soldering.
(4) Do not expose the component to open flame.
(5) This specification applies to the functionality of the component as a single unit.
(6) Storage Conditions: If the product is to be stored for a period greater than Six Months after the Delivery Date, it is recommended that customers confirm the solderability and characteristics for the product prior to use.
(7) This product is not recommended for use in the following applications: Automotive, Medical, Military, Safety, or any other high-reliability, life dependant applications. Contact Abracon Corporation prior to using this product when in doubt.

EOL

30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com