




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020-01-17	Allen Pan	Rev.03 To Rev.A

AX - XX B M M B - Q L 8 A P 0


AU(2A)
AD(5A)

02: 2Pin
03: 3Pin
04: 4Pin
05: 5Pin
06: 6Pin
08: 8Pin

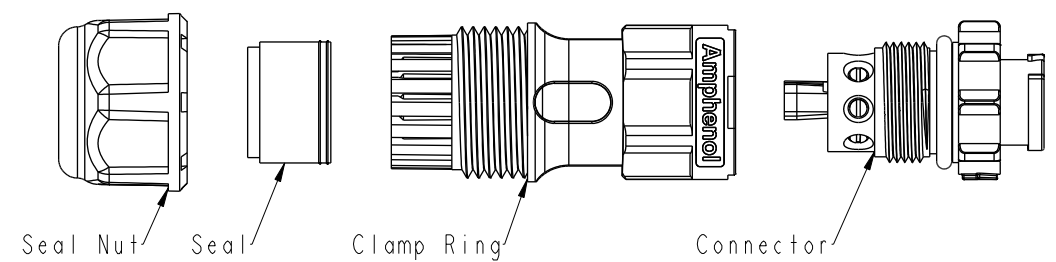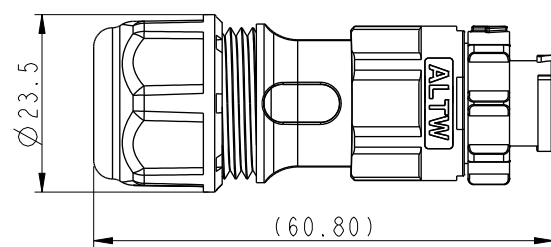

Note:

- * IP: IP68 (Mated)
- * Connector: Thermoplastic, Black.
- * Pin: Copper Alloy, Gold Plated.
- * Clamp Ring: Thermoplastic, Black.
- * Seal Nut: Thermoplastic, Black.
- * Seal: Rubber.
- 1.Red Color Seal 1, Cable OD 4.0~6.0mm
- 2.Blue Color Seal 2, Cable OD 6.0~8.0mm
- * Wire Conductor: 20AWG~24AWG.

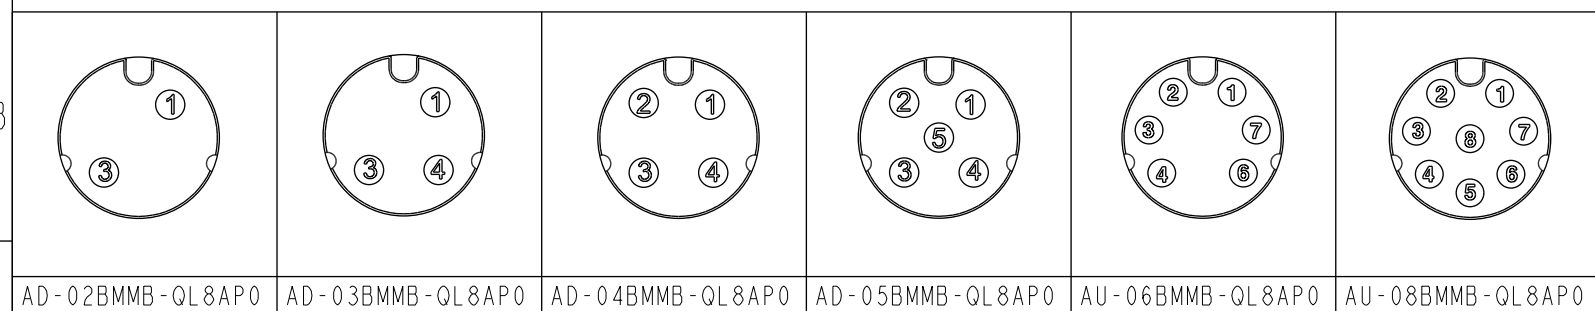

AD-02BMMB-QL8AP0 AD-03BMMB-QL8AP0 AD-04BMMB-QL8AP0 AD-05BMMB-QL8AP0 AU-06BMMB-QL8AP0 AU-08BMMB-QL8AP0

UNIT:mm		TOLERANCE		TITLE		ITEM NO		DRAWN BY		DATE	
±0.5 mm				X-Lok A-Size Field Installable Screw-in Type M Conn. M Pin		AX-XXBMMB-QL8AP0		Allen Pan		2020-01-17	
		SCALE		SIZE		DWG NO		CHECKED BY		DATE	
REV. A		1:1		A4		ALTW		Sam Ho		2020-01-17	
		WC-REV.		A.5		CUSTOMER		APPROVED BY		DATE	
				QC: Inspection item		ALTW		Fred Lee		2020-01-17	

Amphenol LTW
安費諾亮泰企業股份有限公司