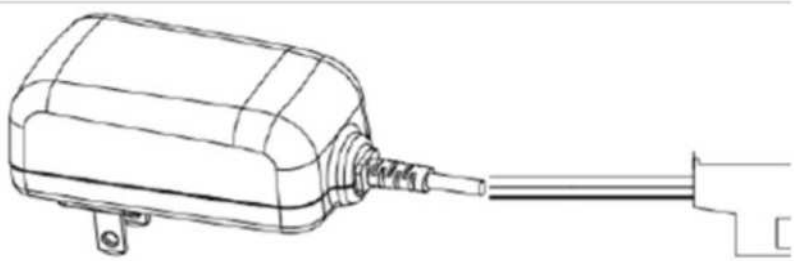
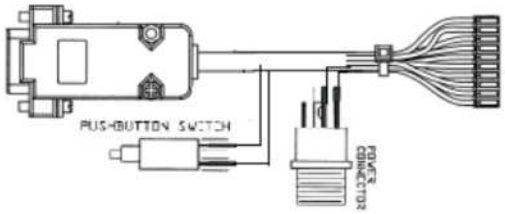
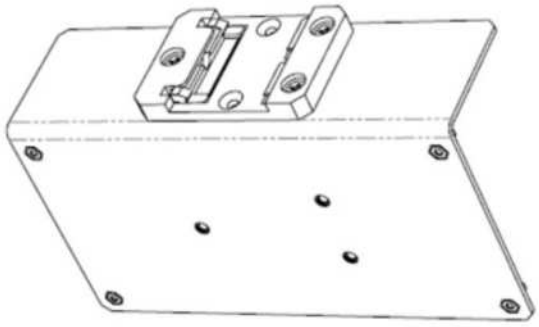
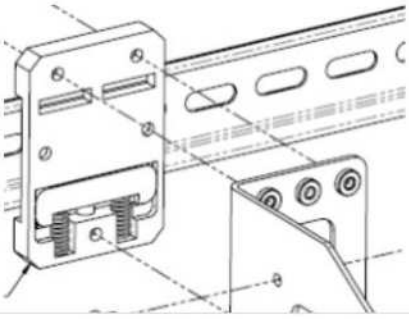
ASC0409DC	6 feet	Diagnostics Port and Programming. **3-Pin** to **DB-9** enclosed Wireless Data Transceiver Connector to DB9 of **enclosed** serial radio	FGR2, FGR3 GX, LRS

EMD1280 AX	EMD1280UX	Input: 100-240 VAC, 50/60 HZ Output: 12.0 VDC, 800 mA 2-pin Phoenix Connector (HTPlus-type Connector)	Z9-P2 Z9-PE2 FGR2-PE FGR2-CE FGR3-CE GX-CE HT-CE HTP-900 LRS-455-CE	

ASC3610DJ	3 foot	Data Interface cable, 10-in board Level Connector to DB-9, Plus a power jack (2mm Barrel power connector), and setup Switch. RS-232 only (Rainbow Cable + Power + setup Switch)	FGRIO, FGR2-C, FGR3-C, GX-C, LRS-C	

ECN3102MF	Adapter, **N-Type Male** to **SMA Female**, Gold contact pin	Part of **EAN0900NR**	

MHS-WMS	Shoe for new enclosure, for the gannet.	FGR2-CE, FGR2-PE, FGR3-CE, HT-PE, GX-CE, FGR2-IOS-CE	
AOH0001HT	DIN Rail Bracket Kit (Includes **MIL0001HT**)	FGR2-P, HT-P, Z9-P, Z9-P2, ZIQ-P	
MBRK-DIN-N **AOB7001AA**	DIN Rail Mount Bracket Assembly for the gannet. (Includes **ASM7002DR**)	FGR2-CE, FGR2-PE, FGR3-CE, HT-PE, GX-CE, FGR2-IOS-CE	
AOH4003SP	DIN Rail bracket kit, reversible ZumLink Z9-PE/Z9-PE2	Z9-PE, Z9-PE2	

ECN1234TN	Adapter, **TNC Male** to **N-Type Female**	Enclosed (FGR2, FGR3, ZumLink, I2, GX)	

EAN0900SR	900 MHz, Whip Stub, Half Wave, **2 dBi**, Right Angle-360 degree swivel, with Straight **SMA Male** RF connector. (Larsen SPDA24918, Mobile Mark PSKN3-925S) Weight 0.06 lbs (26 grams)	

EAN0906WB	902 - 928 MHz, **6 dBi**, 65" Omni directional fiberglass antenna with heavy duty mounting bracket and N-Type Female RF Connector. Does not include cable. (Laird/ANTENEX	

EAN2405WC	2.4-2.5 GHz, **5 dBi**, omni-directional. Does not include mounting hardware or cable. (Maxrad BMAXC24505) Weight 0.16 lbs (0.073 kg)	GX, GXM, I2	