CLIFF

AIRTIGHT XLR RANGE



The airtight XLR is the latest XLR connector designed and made by Cliff UK. It is an airtight connector, primarily intended for applications such as active speakers, where it is detrimental to have air movement in and out of the enclosure. The movement of the speaker diaphragm can cause air pressure changes. This air can produce noise if leaked in and out of the enclosure via any small holes.

A gasket is supplied to seal the socket flange against the enclosure. The gasket can be fitted on the front or rear of the XLR depending on preferred mounting. 3 mounting types available. Contacts are gold plated. Female versions are available with a latch.

Rated Current:	3 Pin 5A. Nominal, 15A. Max.*
Rated Voltage:	250VAC Max.*

Part Numbers:

CP30060	ATXLR MALE SOLDER CUP
CP30070	ATXLR FEMALE SOLDER CUP
CP30080	ATXLR FEMALE LATCHING SOLDER CUP
CP30061	ATXLR MALE PCB
CP30071	ATXLR FEMALE PCB
CP30081	ATXLR FEMALE LATCHING PCB
CP30062	ATXLR MALE 90° PCB
CP30072	ATXLR FEMALE 90° PCB
CP30082	ATXLR FEMALE LATCHING 90° PCB

© CLIFF 06/2021 ISS. 4

*** For further information, contact sales@cliffuk.co.uk**

Cliff Electronic Components Limited,
76 Holmethorpe Avenue, Holmethorpe Ind. Estate,
Redhill, Surrey RH1 2PF U.K.
Tel: +44 (0)1737 771375 Fax: +44 (0)1737 766012


www.cliffuk.co.uk


✓RoHS


Product Drawings


Non Latching Models

90° PCB Mounting

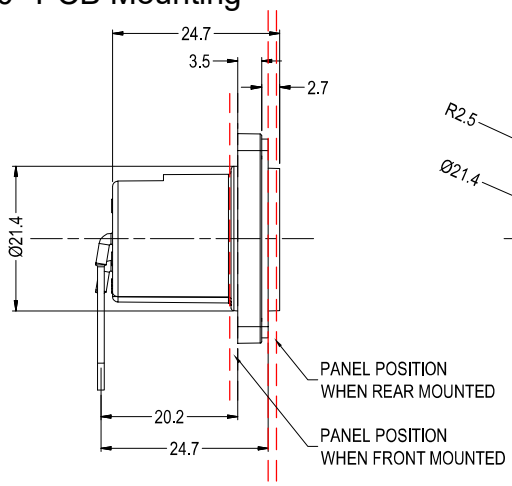


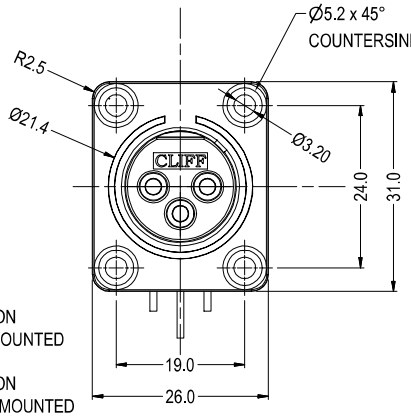








PCB Mounting

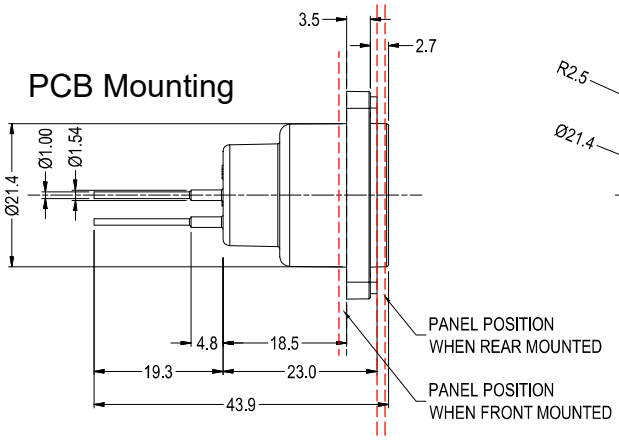

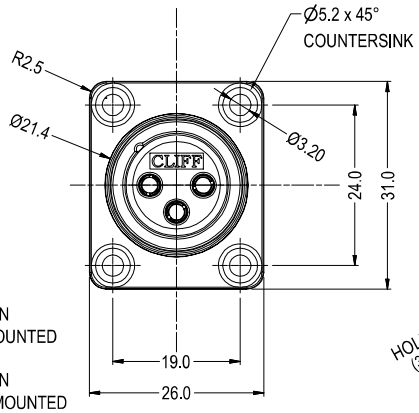





Latching Models

Female Latching with solder cup

