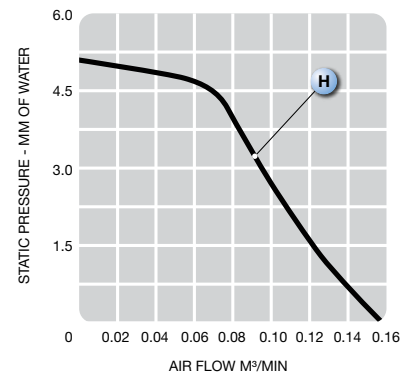
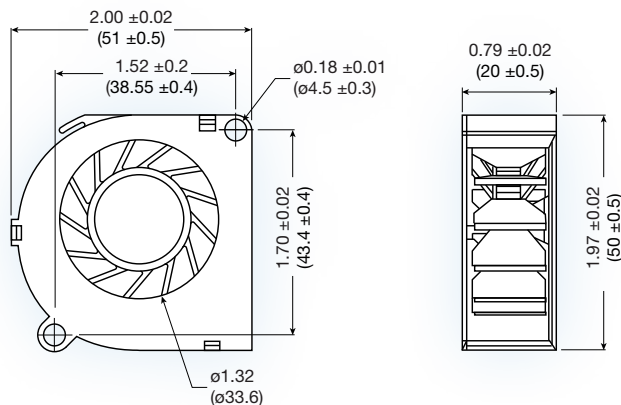


B5020 series

**(51 x 50 x 20 mm)**

2.00 x 1.97 x 0.79 inches

Features:	compact size exhaust blower
Construction:	UL94V-0 PBT impeller and frame
Bearing option:	2 ball bearing or fluid dynamic bearing
Connection:	lead wires
Protection:	thermal
Options:	tachometer output or locked rotor alarm signal

Model No.	Rated Voltage V	Current mA			Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dB(A)	Weight g
		5	12	24		M³/Min.	CFM	MM	INCH		
B5020L*	5/12/24	250	120	90	4,000	0.16	6	5.10	0.20	29	22

*This speed not UL recognized