BR2/3A
LITHIUM POLY-CARBONMONOFLUORIDE




Features & Benefits

- High energy density
- Long shelf life
- Stable operation
- High rate discharge
- Strong leakage resistance
- Excellent durability


Specifications

Nominal Capacity:	1200 mAh
Nominal Voltage:	3V
Weight:	Approximately 13.5g
Operating Temperature:	-40°C - +85°C


Dimensions

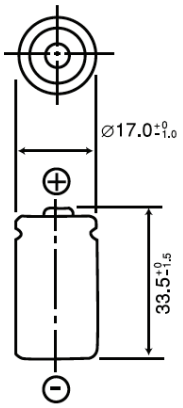

Temperature Characteristics

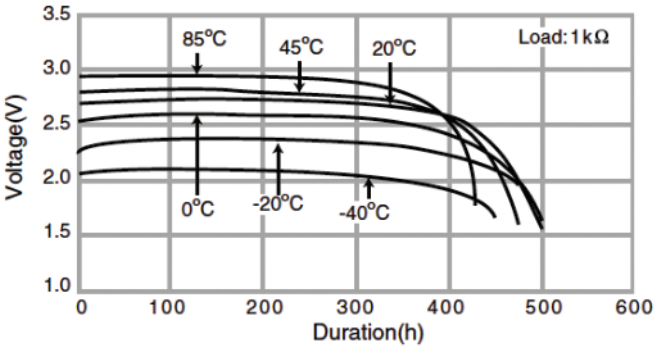

Operating Voltage vs. Discharge Current (voltage at 50% discharge depth)

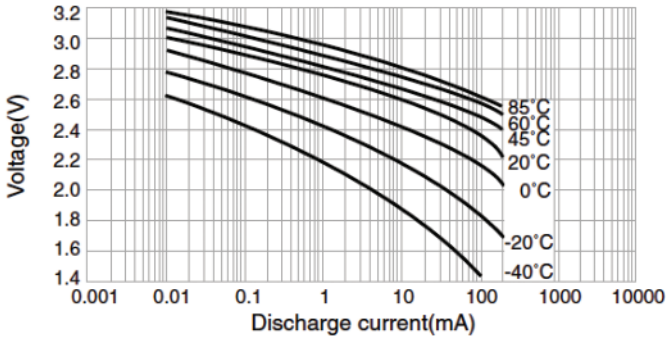

LithiumPoly-Carbonmonofluoride/BR2/3A/Copyright@2015 Panasonic Corporation of America. All Rights Reserved.

For more information on how Panasonic can assist you with your battery power solution needs call **877-726-2228**, visit **www.na.industrial.panasonic.com/products/batteries** or e-mail **oembatteries@us.panasonic.com.**

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.