NOTES: UNLESS OTHERWISE SPECIFIED


1. P/N: 40 PROBE
   HOUSING: MOLDED NYLON. AVAILABLE IN BLACK OR RED
   CONTACT: NICKEL PLATED BRASS.
   TUBING: CLEAR ACRYLIC
   ADAPTER : ANODIZED ALUMINUM. AVAILABLE IN BLACK OR RED

2. P/N: 9214COLOR
   HOUSING: MOLDED ACETAL. AVAILABLE IN BLK & RED
   FRAME: NICKEL PLATED BRASS.
   CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.

3. P/N: W-600/COLOR
   18AWG TINNED COPPER
   0.144 [3.66] O.D. PVC INSULATION
   AVAILABLE IN TEN COLORS.

4. PERFORMANCE:
   MAXIMUM CURRENT: 4.0 AMPS
   MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC
   HANDS FREE: 3500 VRMS
   MAXIMUM TEMPERATURE: 176°F (80°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

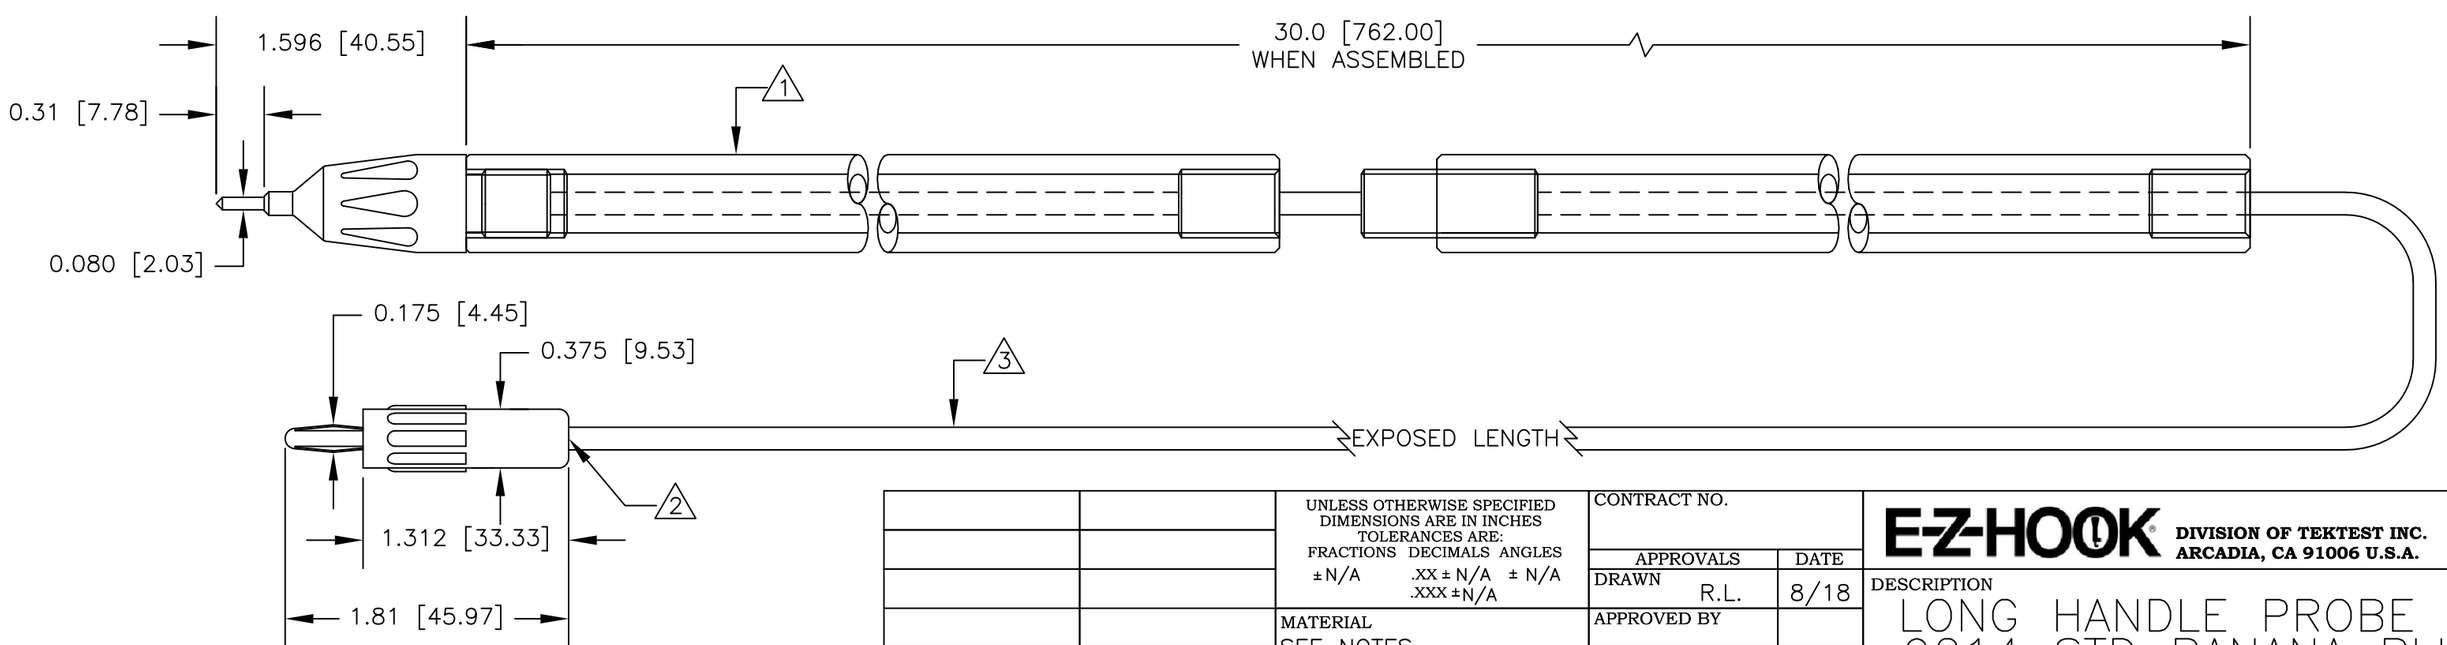

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ±N/A .XX ± N/A ± N/A .XXX ±N/A	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
			DRAWN R.L.	8/18	DESCRIPTION LONG HANDLE PROBE TO 9214 STD BANANA PLUG
		MATERIAL SEE NOTES	APPROVED BY		
		FINISH SEE NOTES			SIZE B | CODE IDENT NO. 08505 | DRAWING NO. BX640 | REV.
NEXT ASSY	USED ON				SCALE 1:1 | SHEET 1 OF 1
APPLICATION		DO NOT SCALE DRAWING			

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC.
MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.