
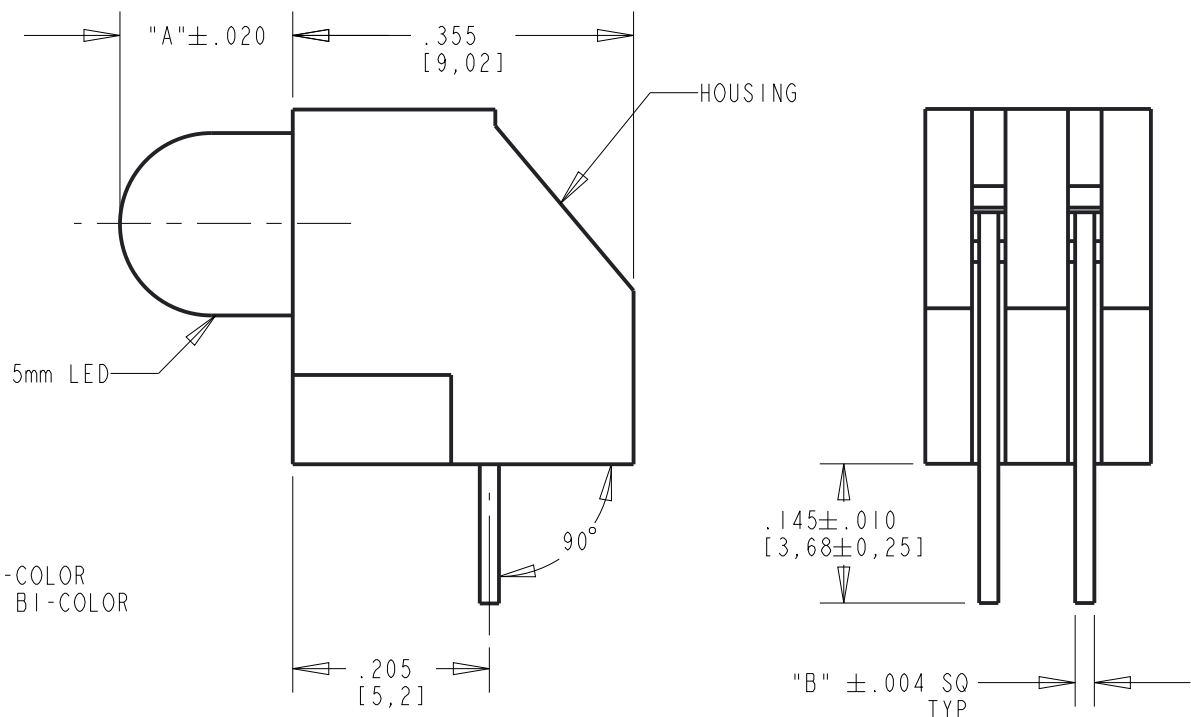


DIALIGHT PART NUMBER	LED COLOR	DIM "A"	DIM "B"	DIM "C"	OPERATING CHARACTERISTICS AT 25°C AMBIENT										ABSOLUTE MAXIMUM RATINGS AT 25°C AMBIENT							
					LUMINOUS INTENSITY TEST CONDITION	LUMINOUS INTENSITY (mcd)			FORWARD VOLTAGE / FORWARD CURRENT TEST COND	FORWARD VOLTAGE (V) [* = FORWARD CURRENT (mA)]		REVERSE CURRENT (μA)	DOMINANT WAVELENGTH (nm)	PEAK WAVELENGTH (nm)	VIEWING ANGLE (DEG)	POWER DISSIP- ATION (mW)	DC FORWARD CURRENT (mA) ** = FORWARD VOLTAGE (V)	PEAK FORWARD CURRENT (mA)	REVERSE VOLTAGE (V)	STORAGE TEMP (°C)	OPERATING TEMP (°C)	SOLDERING TEMP FOR 5 SECONDS (°C)
						MIN	TYP	MAX		TYP	MAX											
550-0208F	GREEN DIFF. LOW PROFILE	.123	.020	.043	I _F = 10mA	12.6	40	—	I _F = 20mA	2.1	2.6	100	569	565	60	100	30	120	5	-55 TO +100	-55 TO +100	260
550-0308F	YELLOW DIFF. LOW PROFILE	.123	.020	.043	I _F = 10mA	3.7	1.6	—	I _F = 20mA	2.1	2.6	100	588	585	60	60	20	80	5	-55 TO +100	-55 TO +100	260
550-0408F	RED DIFF. LOW PROFILE	.123	.020	.043	I _F = 10mA	19	60	—	I _F = 20mA	2.0	2.6	100	623	635	60	100	30	120	5	-55 TO +100	-55 TO +100	260
550-0508F	RED DIFF. INT RES (5 VOLT)	.187	.025	.050	V _F = 5V	2.1	—	—	V _F = 5V	* 10	* 15	100	626	635	60	—	** 7.5	—	5	-55 TO +100	-40 TO +85	260
550-0708F	GREEN DIFF. INT RES (5 VOLT)	.187	.025	.050	V _F = 5V	2.0	8.0	—	V _F = 5V	* 12	* 15	100	—	565	60	—	** 7.5	—	5	-55 TO +100	-20 TO +85	260
550-0808F	YELLOW DIFF. INT RES (5 VOLT)	.187	.025	.050	V _F = 5V	2.0	2.0	—	V _F = 5V	* 10	* 15	100	—	583	60	—	** 7.5	—	5	-55 TO +100	-40 TO +85	260
550-1008F	BLUE NON-DIFF WATER CLEAR	.183	.020	.043	I _F = 20mA	520	—	1500	I _F = 20mA	3.8	4.0	100	472	470	30	120	30	100	5	-40 TO +100	-40 TO +80	260
550-1108F	RED DIFF. LOW CURRENT	.187	.018	.040	I _F = 2mA	1.5	2.3	4.2	I _F = 2mA	1.7	2.0	50	626	635	50	24	7	7	5	-55 TO +100	-55 TO +100	260
550-1208F	YELLOW DIFF. LOW CURRENT	.187	.018	.040	I _F = 2mA	1.2	1.8	—	I _F = 2mA	1.9	2.7	50	—	583	50	36	7	7	5	-55 TO +100	-55 TO +100	260
550-1308F	GREEN DIFF. LOW CURRENT	.187	.018	.040	I _F = 2mA	1.2	1.8	—	I _F = 2mA	1.8	2.2	50	—	565	50	24	7	7	5	-55 TO +100	-55 TO +100	260
550-2208F	GREEN DIFF.	.180	.020	.043	I _F = 10mA	3.6	10	—	I _F = 10mA	2.1	3.0	10	—	563	65	75	25	60	3	-30 TO +100	-25 TO +85	260
550-2308F	YELLOW DIFF.	.187	.020	.040	I _F = 10mA	19	40	100	I _F = 10mA	2.1	2.6	100	590	585	50	52	20	60	5	-40 TO +100	-40 TO +85	260
550-2408F	RED DIFF.	.180	.020	.043	I _F = 10mA	2.2	6.3	—	I _F = 10mA	2.2	2.55	10	—	650	50	60	20	60	3	-30 TO +100	-25 TO +85	260
550-2508F	ORANGE DIFF.	.187	.018	.040	I _F = 10mA	4.0	7.0	—	I _F = 10mA	1.9	2.4	100	602	600	60	135	30	90	5	-40 TO +100	-40 TO +100	260
550-3008F	R/G BI-COLOR	.180	.020	.043	I _F = 20mA	29/12	90/40	—	I _F = 20mA	1.8/2.1	2.4/2.8	100	638/569	660/565	60	100/100	40/30	200/120	4/5	-55 TO +100	-55 TO +100	260
550-3108F	Y/G BI-COLOR	.180	.020	.043	I _F = 20mA	2.5	8.7	—	I _F = 20mA	2.1/2.1	2.8/2.8	100	588/569	585/565	50	60/100	20/30	80/120	5/5	-55 TO +100	-55 TO +100	260
550-5108F	RED DIFF.	.180	.020	.043	I _F = 10mA	19	40	90	I _F = 20mA	2.1	2.6	100	623	635	50	81	30	90	5	-40 TO +100	-40 TO +85	260
550-5208F	GREEN DIFF.	.180	.020	.043	I _F = 10mA	19	40	90	I _F = 20mA	2.1	2.6	100	571	569	50	52	20	60	5	-40 TO +100	-40 TO +85	260
550-5308F	OBSOLETE, USE 550-2308F																					
550-5408F	AMBER DIFF.	.180	.020	.043	I _F = 10mA	12.6	40	90	I _F = 20mA	2.0	2.6	100	602	610	50	60	20	60	5	-40 TO +100	-40 TO +85	260
550-5508F	RED NON-DIFF WATER CLEAR	.187	.018	.040	I _F = 20mA	80	125	—	I _F = 20mA	2.2	3.0	100	626	635	24	135	30	90	5	-55 TO +100	-55 TO +100	260
550-5608F	GREEN NON-DIFF WATER CLEAR	.187	.018	.040	I _F = 20mA	80	120	—	I _F = 20mA	2.3	3.0	100	569	565	24	135	30	90	5	-55 TO +100	-20 TO +100	260
550-5708F	YELLOW NON-DIFF WATER CLEAR	.187	.018	.040	I _F = 20mA	80	140	—	I _F = 20mA	2.2	3.0	100	585	583	24	85	20	60	5	-55 TO +100	-55 TO +100	260
550-5808F	AMBER NON-DIFF WATER CLEAR	.180	.024	.049	I _F = 20mA	60	90	—	I _F = 20mA	2.2	2.5	100	—	605	20	125	50	100	4	-30 TO +100	-30 TO +85	260

REV	ECN NO	REVISIONS	DRN	CKD	APP	DATE
A	—	NEW RELEASE	KLJ	NO		10-24-08
B	91121	UPDATED LED SPECS FOR 550-5108F, 550-5208F, 550-2308F & 550-5408F, OBSOLETE 550-5308F	LD	NO		3-23-22

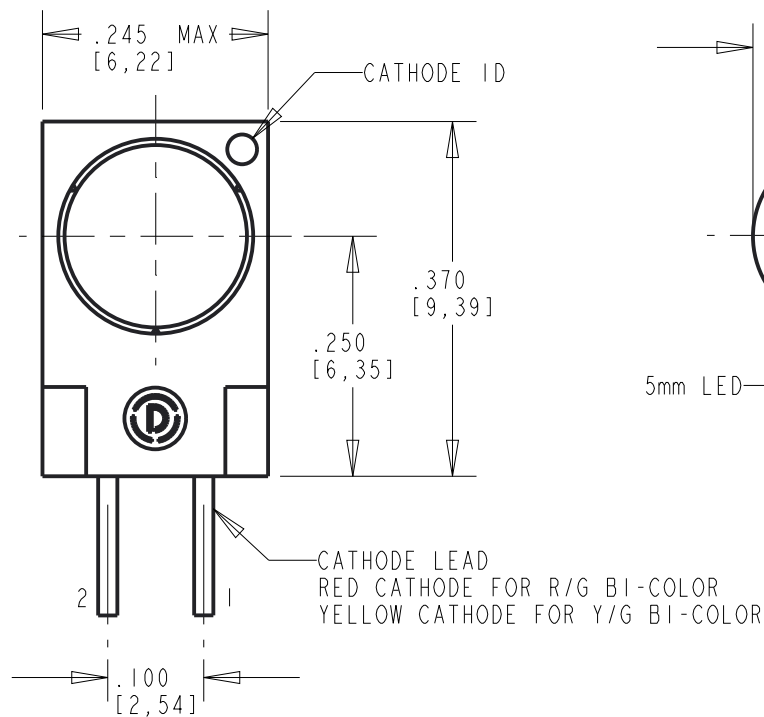

RoHS COMPLIANT 550-XX08F




Part Numbers with the "F" suffix ending are RoHS Compliant.
For example: 550-5108F
Packaging is marked with "RoHS Compliant" label or equivalent markings. Parts can be wave soldered, dip soldered or hand soldered using typical lead-free soldering process with max 260°C temp. for 5 sec.



ATTENTION:
OBSERVE PRECAUTIONS FOR
HANDLING ELECTROSTATIC
SENSITIVE DEVICES

NOTES:

- LED LEAD DIMENSIONS SHOWN ARE MEASURED AT HOUSING EXIT.
- LEADS TO FIT INTO HOLES SPACED AS PER PATTERN.
- PIN NUMBERS FOR REFERENCE ONLY, DESIGNATION NON-EXISTENT ON PART.
- DIALIGHT PART NUMBERS: 550-XX08F.
- THIS ASSEMBLY CONTAINS ELECTROSTATIC DISCHARGE SENSITIVE DEVICES (ESDS). MAINTAIN ALL PRECAUTIONARY MEASURES DURING ASSEMBLY, HANDLING, AND STORAGE IN ACCORDANCE WITH IPC-A-610.

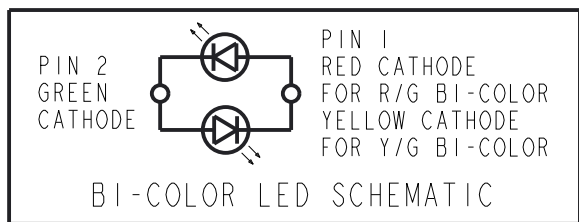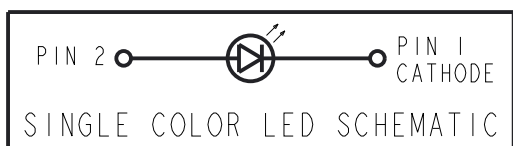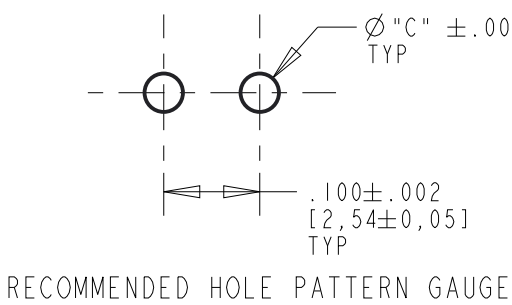

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT CORP. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT CORP.		
SCALE: 5.000	DRAWING NUMBER	REV
ALL DIM'S IN: INCHES (MM)	C-17673	B
TOLERANCES: UNLESS OTHERWISE SPECIFIED	TITLE	5mm LED CBI RoHS COMPLIANT
FRACTIONS: ±1/64 DECIMALS (.XX): ±.02 DECIMALS (.XXX): ±.015	MATERIAL	
ANGLES: ±3°		
FINISH		
FSCM 83330	SHEET 1 OF 1	FAMILY TABLE:

Dialight

1501 ROUTE 34 SOUTH
FARMINGDALE, NJ 07727
(732) 919-3119
www.dialight.com