NOTES:

1. MATERIALS AND FINISHES:
   BODY,SLEEVE,CONTACT,BRAID CLAMP, PIN
   CLAMP NUT,COUPLING NUT -BRASS,SILVER PLATING
   INSULATOR - COPOLYMER OF STYRENE
   GASKET - SILICONE RUBBER, RED
   GASKET - SYNTHETIC RUBBER
   RETAINING RING - PHOSPHOR BRONZE

2. PACKAGING:
   A. QUANTITY: SINGLE PACK
   B. MARKING: BAG TO BE MARKED
      "AMPHENOL RF, 32225, AND DATE CODE"


3. FOR CABLE ASSEMBLY INSTRUCTIONS,SEE SPEC C19.

4 SHOWS CABLE ENTRY DIMENSIONS.


THIRD ANGLE PROJ.

REVISIONS


REV	DESCRIPTION	DATE	ECO	APPR
--	RELEASE TO MFG.	--	--	--
U	REDRAWN IN PRO-E & COD SHEET ADDED	6/18/15	50333	AAP

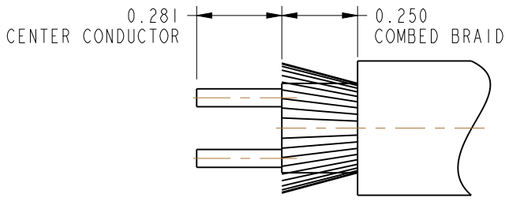

RECOMMENDED CABLE STRIPPING DIMENSIONS



SCALE 1.100

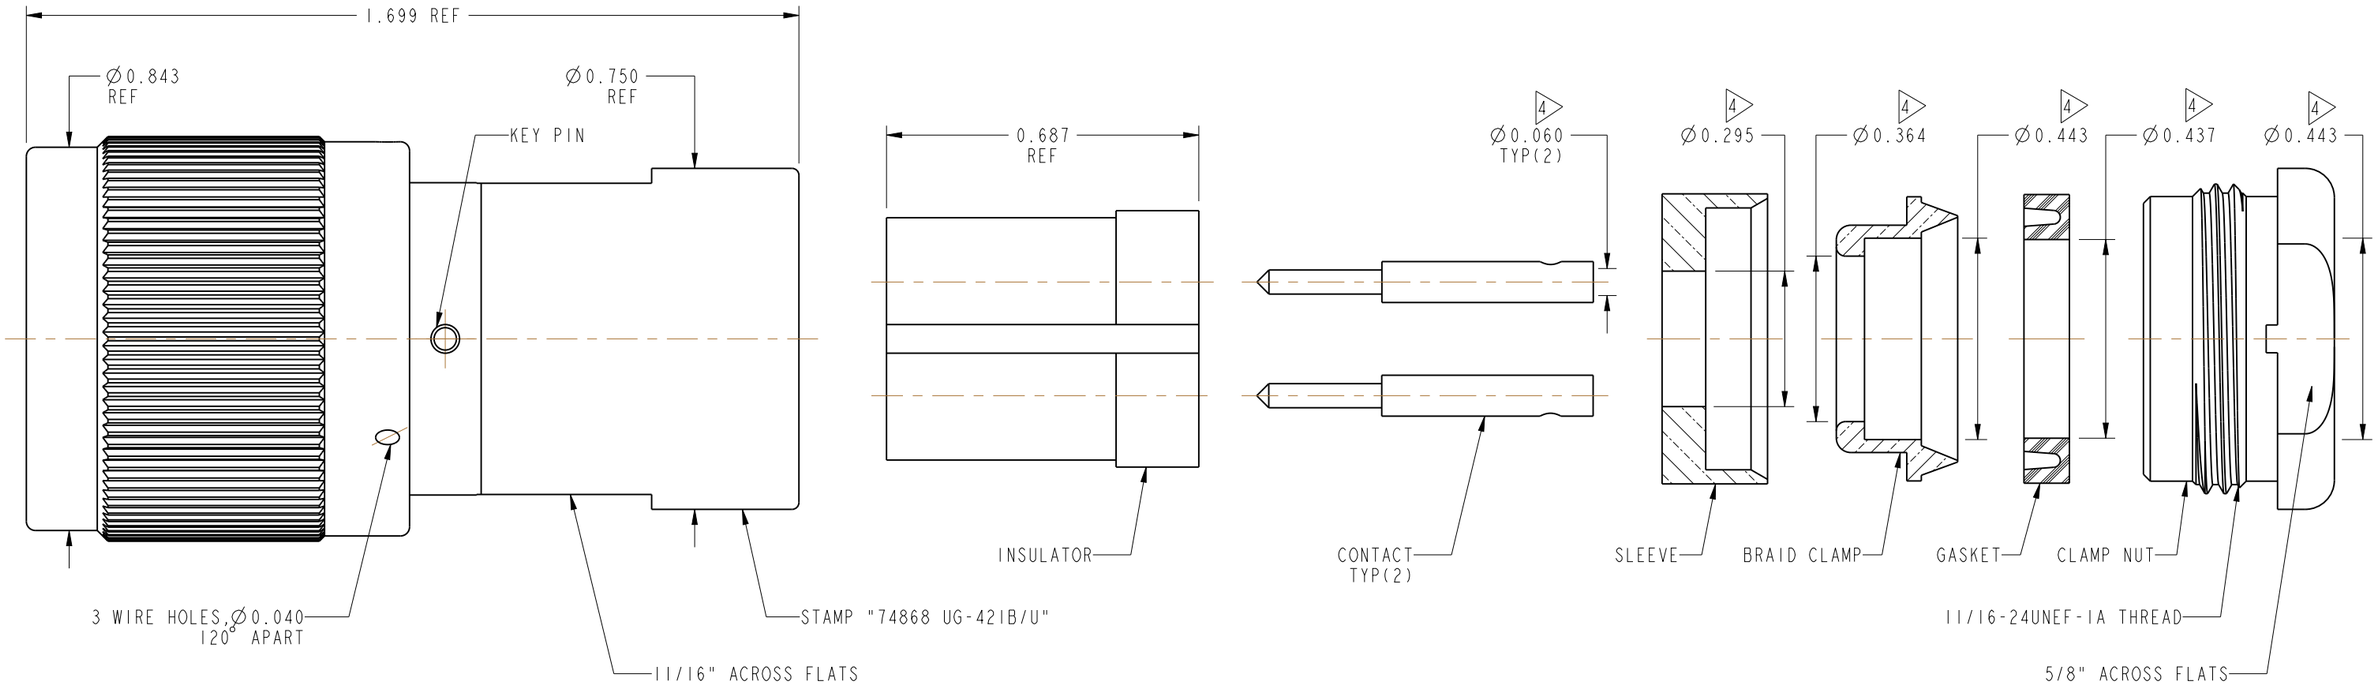

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:
2 PLACE DECIMAL ±.015 (0,381 mm) | 3 PLACE DECIMAL ±.005 (0,127 mm) | ANGLES ± 1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL
SEE NOTES

REFERENCE
REB 49320
MIL-C-3655-II

CONFIGURATION LEVEL: In Work

FINISH

DRAWN	A ARUN PRABU	DATE 02-Jan-15
ENGINEER	K.CAPOZZI	DATE 02-Jan-15
APPROVED	K. CAPOZZI	DATE 6/18/15
CAD FILE		

TITLE
TWINAX STR PLUG
FOR RG-22/U CABLE

SCALE: 3.0:1.0 | SHEET 2 OF 2

DWG SIZE B | REV U

Amphenol RF
www.amphenolrf.com

DRAWING NO.32225
ITEM NO.32225
PART NO.32225