



NOTES:

1. MATERIALS AND FINISHES:
BODY,BRAID CLAMP,CLAMP NUT,
COUPLING NUT & OUTER CONTACT - BRASS,SILVER PLATING
CONTACT - BeCu,SILVER PLATING
INSULATORS - PTFE,NATURAL
RETAINING RING - PHOSPHOR BRONZE
WASHER - COPPER,SILVER PLATING
GASKETS - SILICONE RUBBER,RED
2. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65° C TO +165° C
3. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL RF, 82-3218 AND DATE CODE"
4. SHOWS CABLE ENTRY DIMENSIONS.


THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
--	RELEASE TO MFG.	-----	-----	-----
C	REDRAWN IN PRO-E & COD ADDED	12/10/14	50200	CL

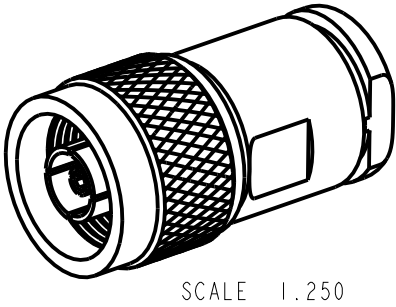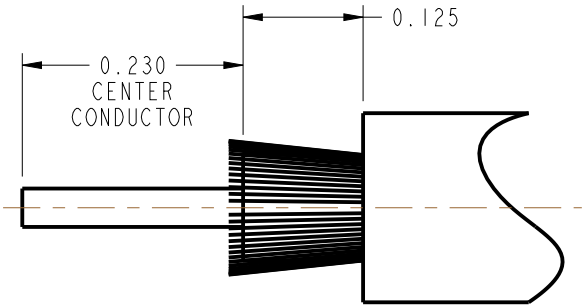

RECOMMENDED CABLE STRIPPING DIMENSIONS

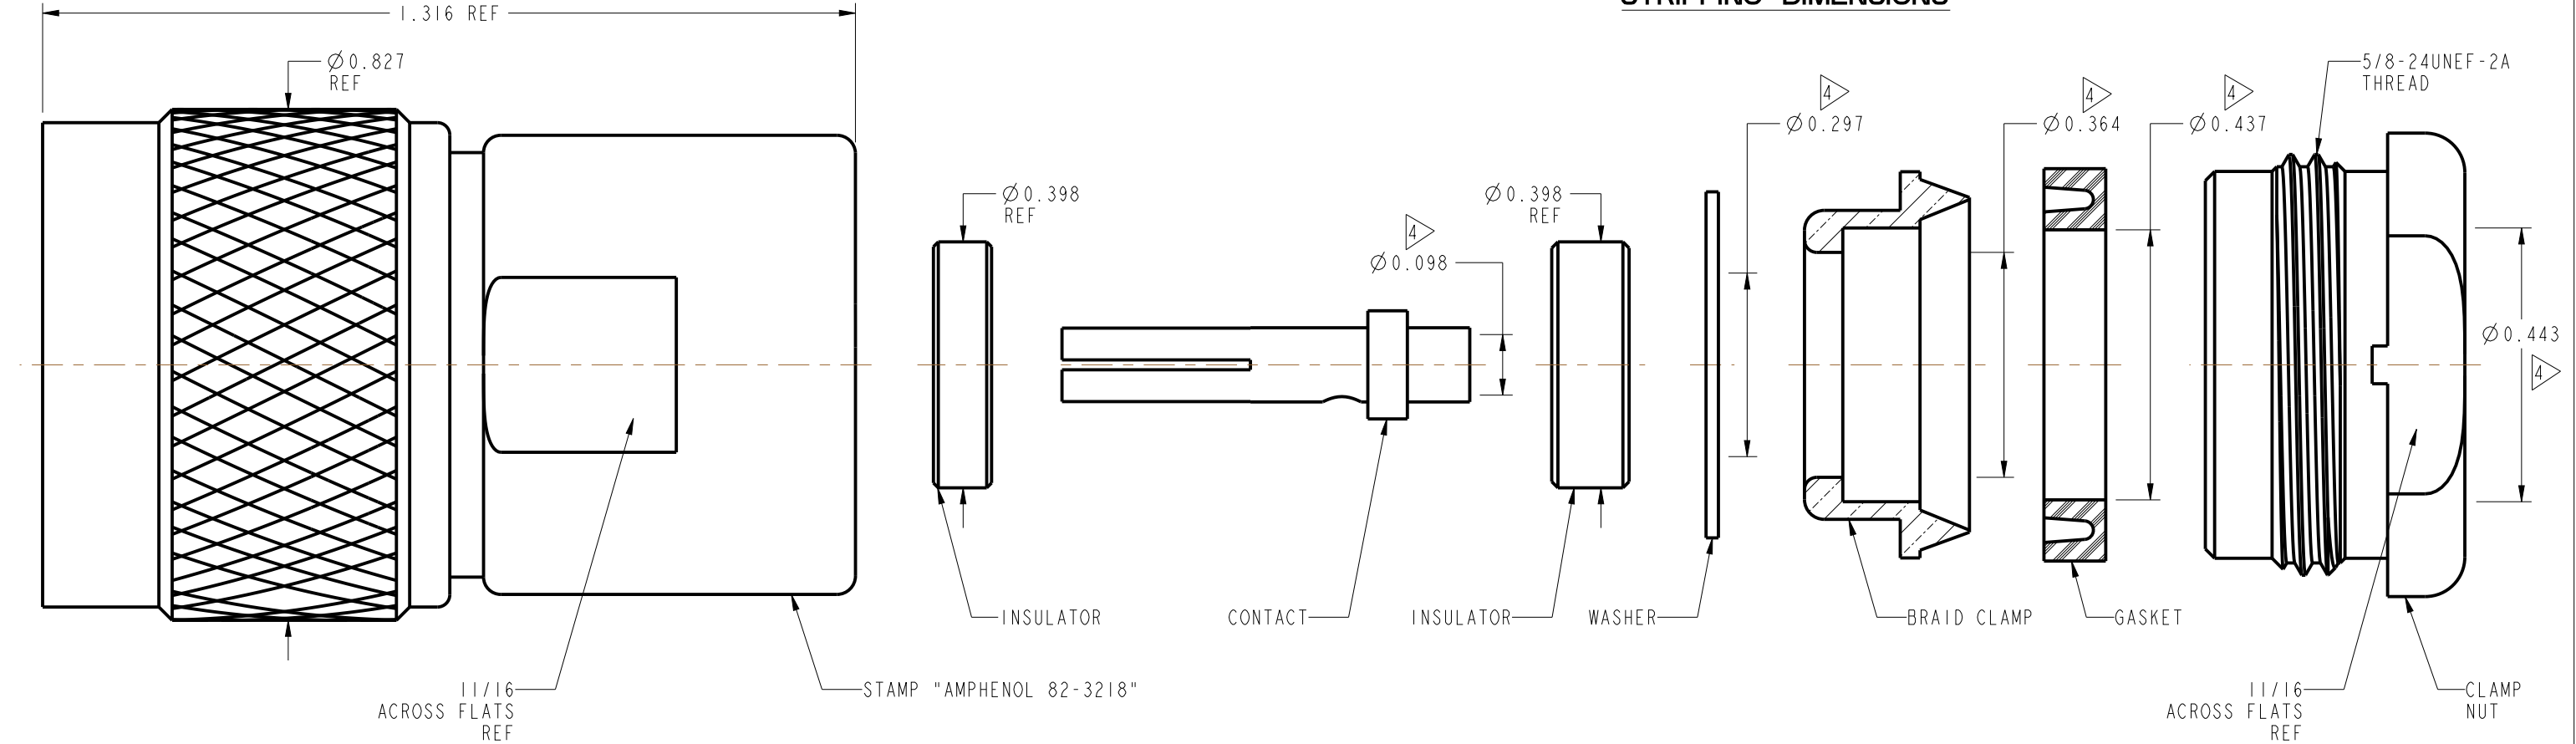

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL SEE NOTES	DRAWN CLEMENT	DATE 25-Sep-14	TITLE N STR PLUG CAPTIVATED CONTACT POLARIZED FOR RG 225/U	Amphenol RF www.amphenolrf.com
	REFERENCE EAR #	ENGINEER K.CAPOZZI	DATE 25-Sep-14		
	CONFIGURATION LEVEL: In Work	APPROVED K. CAPOZZI	DATE 10/30/14	SCALE: 3.9:1.0	SHEET 2 OF 2
	FINISH	CAD FILE		DWG SIZE B	REV C
				DRAWING NO.82-3218	
				ITEM NO.82-3218	
				PART NO.82-3218	