

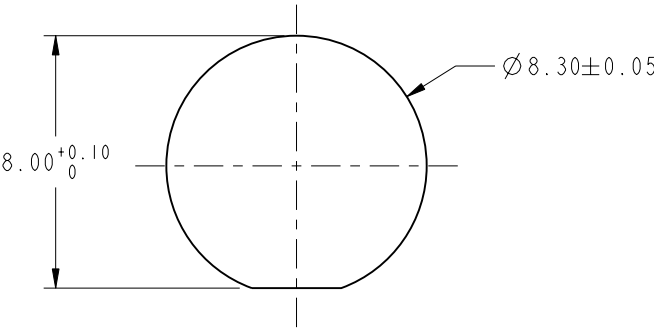
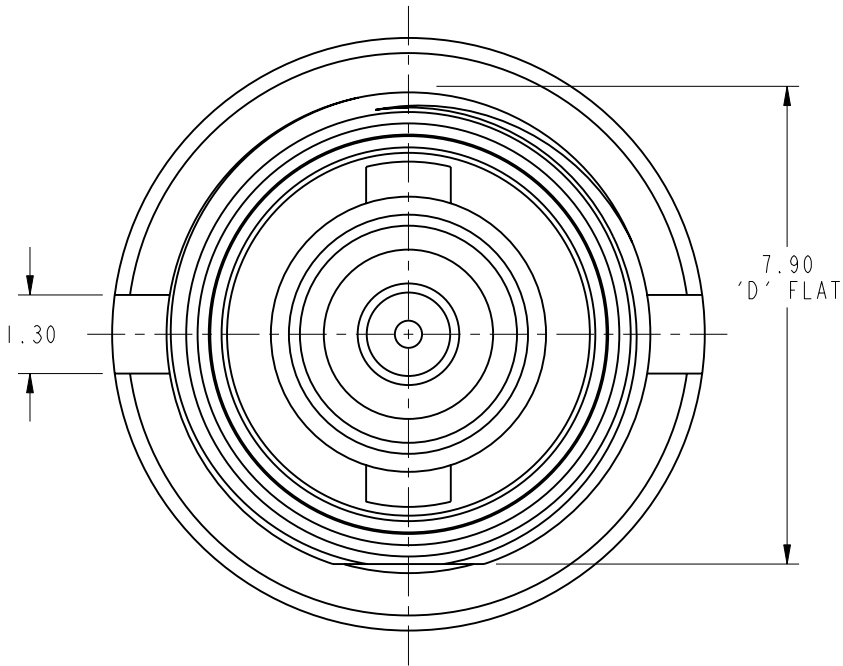


NOTES:

1. MATERIALS AND FINISHES:
BODIES - BRASS, NICKEL PLATING
CONTACT - BeCu, GOLD PLATING
SLEEVE - DELRIN
INSULATOR - PTFE
2. ELECTRICAL:
A. IMPEDANCE: 75 OHM
B. FREQUENCY RANGE: DC - 3 GHz
C. RETURN LOSS: -25 dB MIN @ 3 GHz
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: +65° C TO -165° C
4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOLRF,APH-HD-ISO-1023 AND DATE CODE"

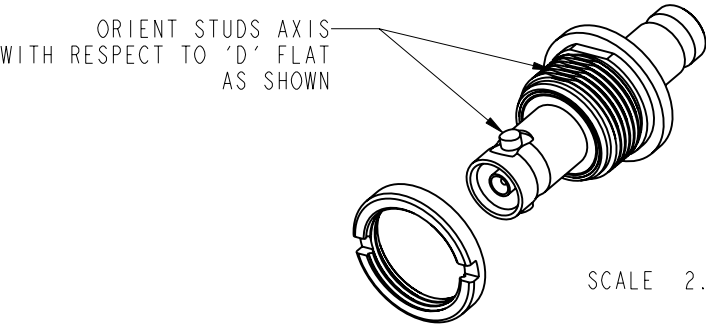

SCALE 4.200
RECOMMENDED MOUNTING
HOLE DIMENSIONS

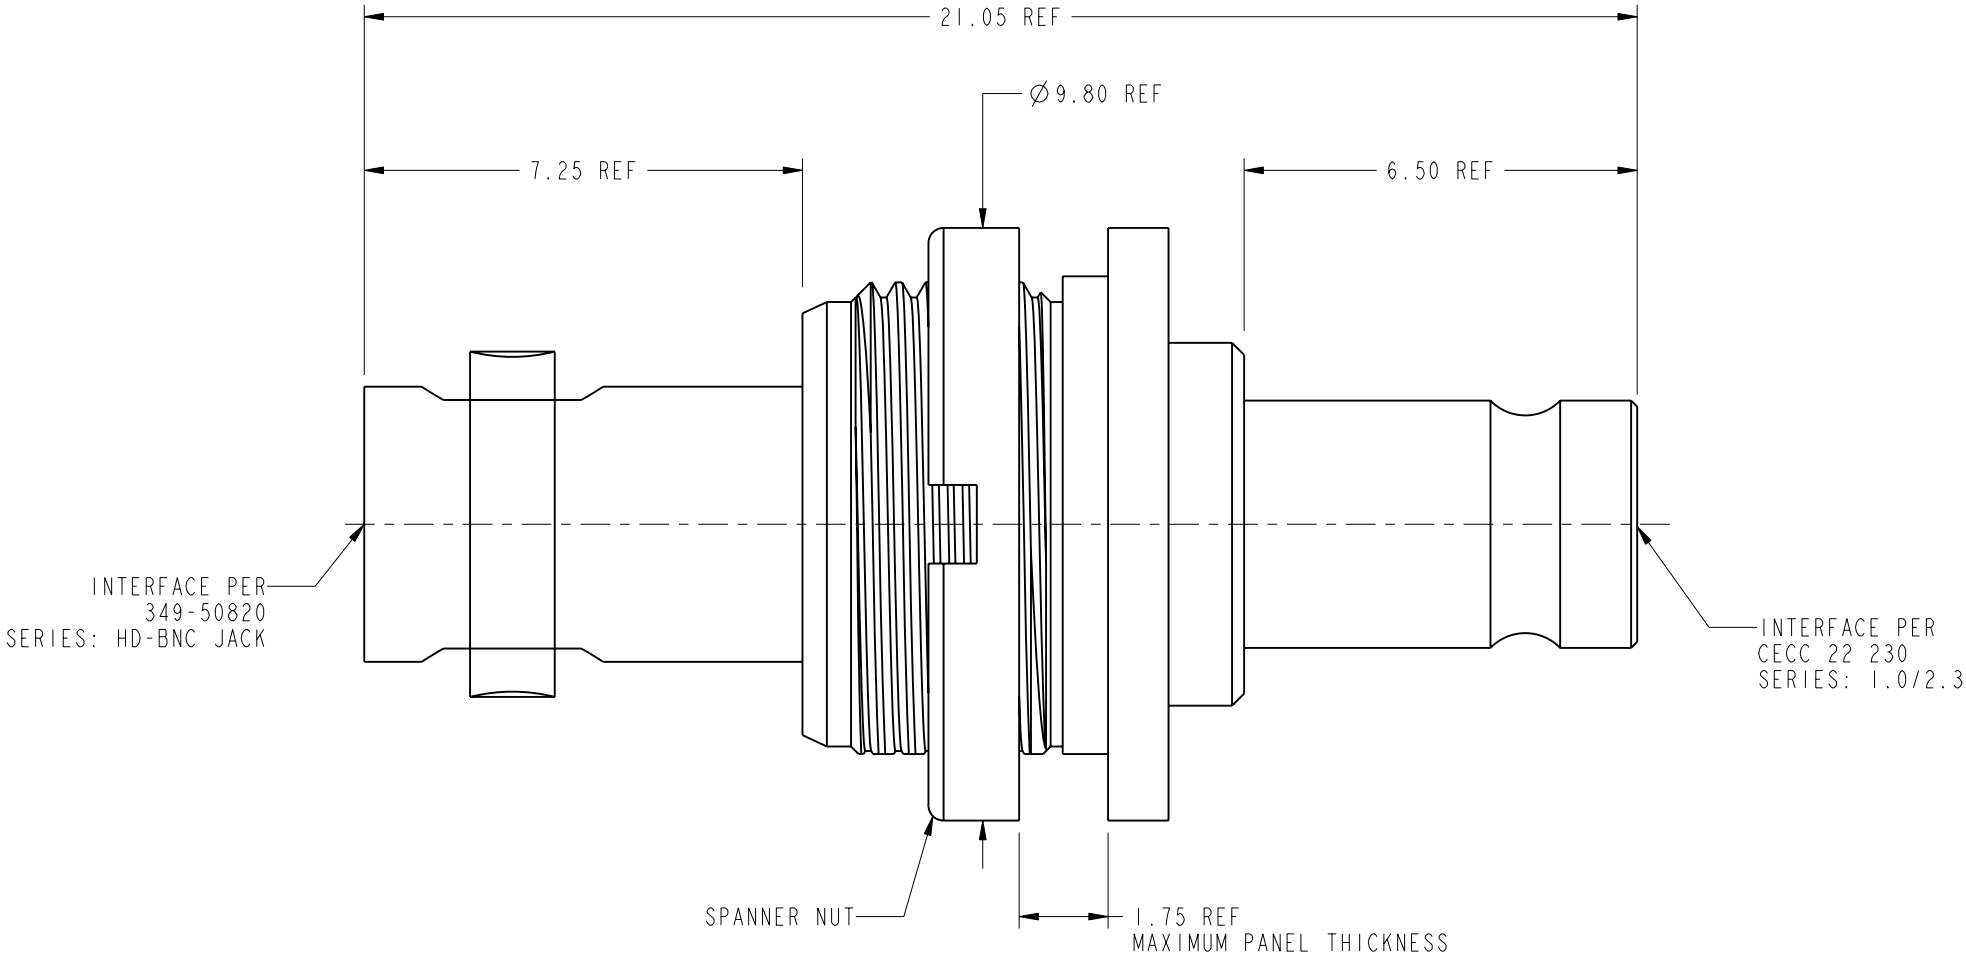

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
<0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES
± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL

SEE NOTES

REFERENCE
EAR # 4295 AND EXP:615X-2759-100

CONFIGURATION LEVEL: ☐☐☐☐

FINISH

DRAWN

I.XU

ENGINEER

A ARUN PRABU

APPROVED

S.HSIEH

CAD FILE

DATE

19-Jul-11

DATE

14-Jan-11

DATE

25-Jul-11

TITLE

ISOLATED ADAPTER
HD BNC STR JACK
TO 1.0/2.3 JACK

SCALE: 8.0:1.0

DWG SIZE

B

REV

B

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	30-Mar-11	48505	CL
B	'D' FLAT WAS 7.80	25-Jul-11	48638	SCOTT

Amphenol RF

www.amphenolrf.com

DRAWING NO.APH-HD-ISO-1023

ITEM NO.APH-HD-ISO-1023

PART NO.APH-HD-ISO-1023