




REVISIONS	
REV.	DESCRIPTION
A	INITIAL RELEASE - 6/1/2020

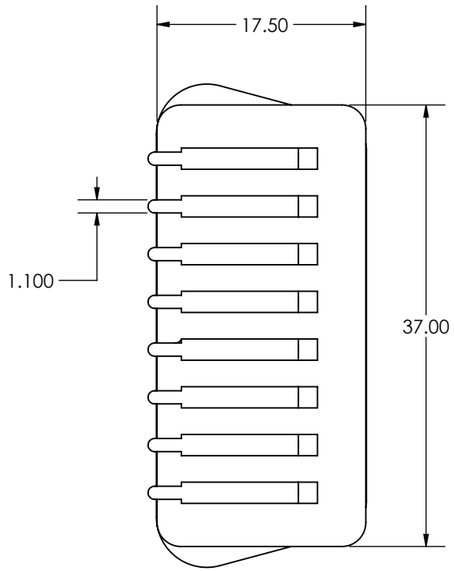

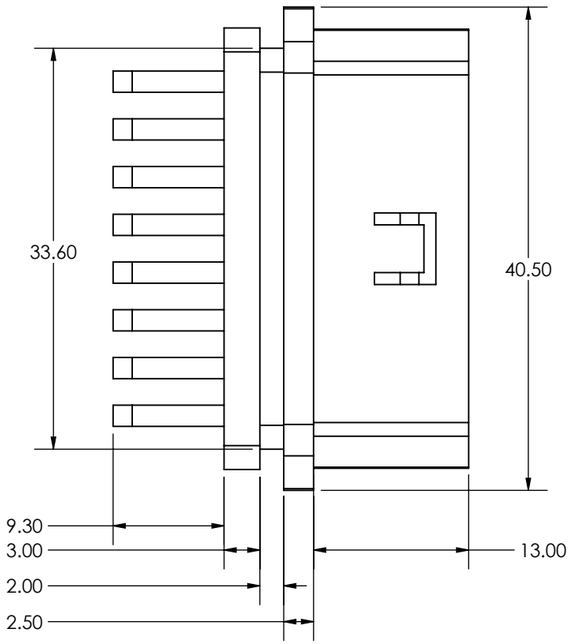

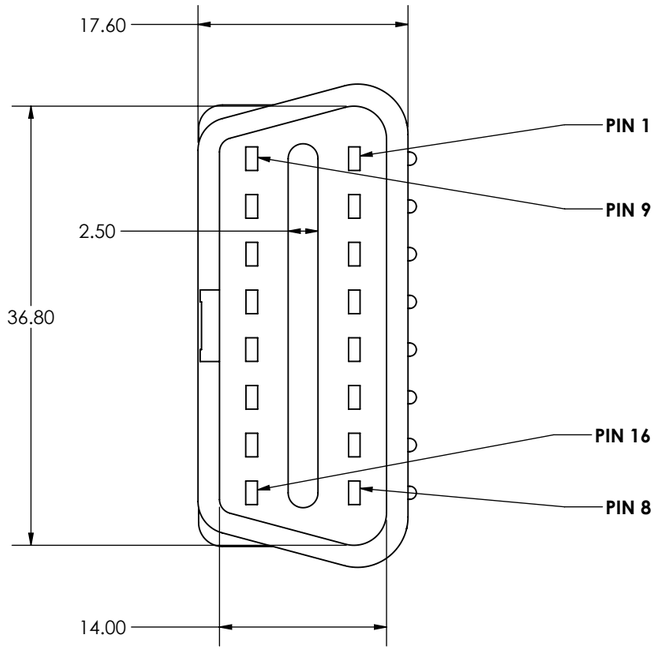






Electrical:

1. Contact Resistance: 3 Ohm MAX
2. Insulation Resistance: 100MOhm Min
3. Rated Voltage: 30V MAX
4. Rated Current: 13 Amps
5. Ambient Temperature Range: -25C to +85C

Mechanical:

1. Housing material: PA66 plus fiber 15%, Color: Black
2. Terminals - Copper, Gold plating 1µm

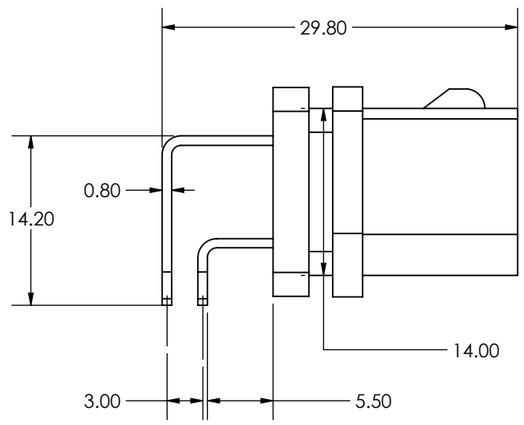

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING OR MATERIAL IS SUBMITTED TO YOU WITH CONFIDENCE THAT IT WILL BE USED ONLY FOR YOUR INFORMATION ON APPLICATION ENGINEERING STUDIES AND SHALL NEVER BE USED IN ANY MANNER DETRIMENTAL TO OUR INTEREST.

DIMENSIONS ARE IN MILLIMETERS UNLESS NOTED.
TOLERANCES:
ANGULAR: ± 1 °
X ±1
X.X ±0.3
X.XX ±0.10

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

MATERIAL:
FINISH:
DESIGNER:
DRAWING DATE:

MACCHINA LLC
P.O. BOX 18701
MINNEAPOLIS, MN 55418
www.macchina.cc

DESCRIPTION
FEMALE OBD2 RIGHT ANGLE

SIZE	DWG. NO.	REV.
B	CCBDF20	A

SCALE: 2:1 | WEIGHT: | SHEET 1 OF 1