

DESCRIPTION: DSUB IP67 FLANGE // FEMALE // COMBO // SOLDER CUP

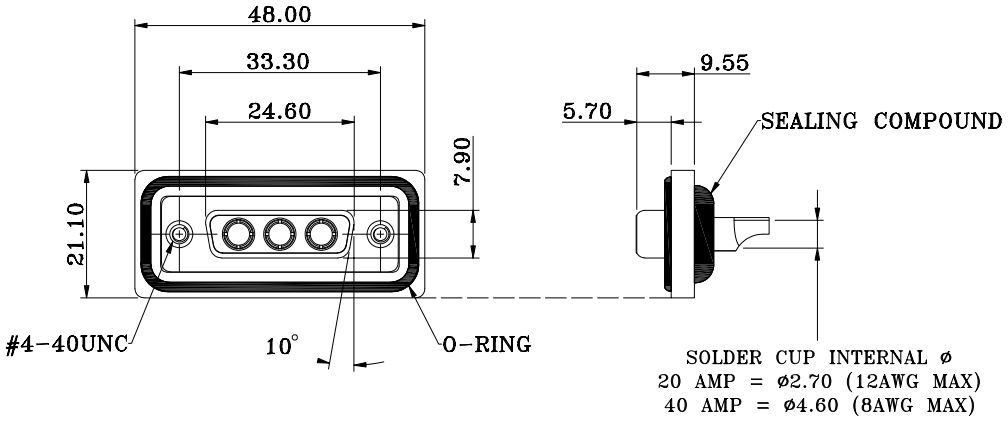

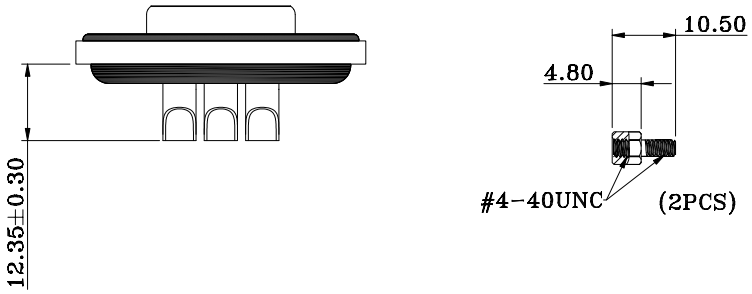

NOTE:

MATERIAL	
HOUSING	PBT UL94V-0, BLACK
FLANGE	PBT UL94V-0, BLACK
CONTACT	BRASS, PLATING P/N KEY BELOW
SHELL	STEEL, NICKEL
O-RING	SILICONE
SEALING COMPOUND	EPOXY
HARDWARE	BRASS; NICKEL PLATED
ELECTRICAL	
POWER CONTACT RATED CURRENT	P/N KEY BELOW
VOLTAGE	1000 VAC 1 MIN
INSULATOR RESISTANCE	5 GOhms MIN.
POWER CONTACT RESISTANCE	2.0 mOhms MAX.
WATER PROOF	IP67
ENVIRONMENT	
OPERATION TEMPERATURE	-25°C TO +85°C

CDFS3W3203LYYY

SERIES
- CDF = COMBO DSUB FLANGE

CONTACT TYPE
- S = SOLDER CUP

POSITION
- 3W3

GENDER
- 2 = FEMALE

POWER CONTACT AMPERAGE
- 2 = 20 AMPS
- 4 = 40 AMPS

HARDWARE OPTIONS
- 1 = 4-40 THREADED INSERTS/4-40 JACKSCREWS

CONTACT PLATING OPTIONS
- 1 = GOLD FLASH
- 2 = 30u" GOLD PLATING

RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: J. KADEL

DATE: 04/07/2020

TOLERANCES

X.	±0.40
.X	±0.30
.XX	±0.20
.XXX	±0.10

NorComp

SCALE: NTS

SHEET 1 OF 1

REV 1

DWG NO. CDFS3W3203LYYY