SMD Power Inductor
CDRCH12D78B




Description
- Ferrite drum core construction
- Magnetically shielded
- L×W×H: 12.5×12.5×8.0 mm Max.
- Product weight: 4.1g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance

Environmental Data
- Operating temperature range: -40℃~+125℃ (including coil's self temperature rise)
- Storage temperature range: -40℃～+125℃
- Solder reflow temperature: 260 ℃ peak

Packaging
- Carrier tape and reel packaging
- 13.0" diameter reel
- 500pcs per reel

Applications
- Ideally used in LED modules, DC/DC converters and 1:1 Transformer, etc.


Dimension - [mm]

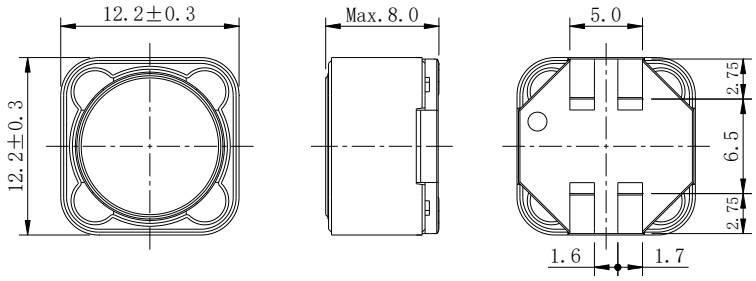



Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.


SMD Power Inductor
CDRCH12D78B

Reference Land pattern – [mm] and Connection











Single winding



Leads connected in series



Leads connected in parallel

Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor
CDRCH12D78B

Electrical Characteristics

Part Name	Stamp	Inductance (μH) [within] ※1	D.C.R. (Ω) Max. (Typ.)	Saturation Current (A) Max. (Typ.) ※2	Temperature rise current (A) Max. (Typ.) ※3	Mode
CDRCH12D78BNP-4R7NC	4R7	4.7±30%	40m(30m)	13.2(15.6)	3.9(4.4)	Single winding
		18.8±30%	80m(60m)	6.6(7.8)	2.8(3.1)	Leads connected in series
		4.7±30%	20m(16m)	13.2(15.6)	5.4(6.1)	Leads connected in parallel
CDRCH12D78BNP-6R8NC	6R8	6.8±30%	46m(36m)	12.0(14.2)	3.6(4.1)	Single winding
		27.2±30%	92m(72m)	6.0(7.1)	2.6(3.0)	Leads connected in series
		6.8±30%	23m(18m)	12.0(14.2)	5.0(5.6)	Leads connected in parallel
CDRCH12D78BNP-100MC	100	10±20%	54m(42m)	10.0(11.8)	3.2(3.6)	Single winding
		40±20%	108m(84m)	5.0(5.9)	2.3(2.6)	Leads connected in series
		10±20%	27m(21m)	10.0(11.8)	4.4(5.0)	Leads connected in parallel
CDRCH12D78BNP-150MC	150	15±20%	72m(58m)	8.2(9.7)	2.8(3.2)	Single winding
		60±20%	144m(116m)	4.1(4.8)	2.0(2.3)	Leads connected in series
		15±20%	36m(29m)	8.2(9.7)	4.0(4.6)	Leads connected in parallel
CDRCH12D78BNP-220MC	220	22±20%	96m(80m)	7.0(8.2)	2.3(2.6)	Single winding
		88±20%	192m(160m)	3.5(4.1)	1.6(1.8)	Leads connected in series
		22±20%	48m(40m)	7.0(8.2)	3.3(3.7)	Leads connected in parallel
CDRCH12D78BNP-330MC	330	33±20%	144m(120m)	5.5(6.5)	1.8(2.1)	Single winding
		132±20%	290m(240m)	2.75(3.25)	1.3(1.5)	Leads connected in series
		33±20%	72m(60m)	5.5(6.5)	2.7(3.0)	Leads connected in parallel

Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor
CDRCH12D78B

Part Name	Stamp	Inductance (μH) [within] ※1	D.C.R. (Ω) Max. (Typ.)	Saturation Current (A) Max. (Typ.) ※2	Temperature rise current (A) Max. (Typ.) ※3	Mode
CDRCH12D78BNP-470MC	470	47±20%	186m(155m)	4.6(5.5)	1.5(1.7)	Single winding
		188±20%	372m(310m)	2.3(2.75)	1.1(1.3)	Leads connected in series
		47±20%	93m(77m)	4.6(5.5)	2.4(2.6)	Leads connected in parallel
CDRCH12D78BNP-680MC	680	68±20%	266m(222m)	3.9(4.6)	1.3(1.5)	Single winding
		272±20%	532m(444m)	1.95(2.3)	0.94(1.05)	Leads connected in series
		68±20%	133m(111m)	3.9(4.6)	2.0(2.3)	Leads connected in parallel
CDRCH12D78BNP-101MC	101	100±20%	384m(320m)	3.1(3.7)	1.10(1.25)	Single winding
		440±20%	768m(640m)	1.55(1.85)	0.78(0.88)	Leads connected in series
		100±20%	192m(160m)	3.1(3.7)	1.6(1.8)	Leads connected in parallel
CDRCH12D78BNP-151MC	151	150±20%	648m(540m)	2.5(3.0)	0.83(0.95)	Single winding
		600±20%	1.29(1.08)	1.25(1.50)	0.60(0.68)	Leads connected in series
		150±20%	324m(270m)	2.5(3.0)	1.2(1.4)	Leads connected in parallel
CDRCH12D78BNP-221MC	221	220±20%	936m(780m)	2.1(2.5)	0.68(0.78)	Single winding
		880±20%	1.87(1.56)	1.05(1.25)	0.48(0.55)	Leads connected in series
		220±20%	468m(390m)	2.1(2.5)	1.0(1.15)	Leads connected in parallel
CDRCH12D78BNP-331MC	331	330±20%	1.35(1.17)	1.7(2.1)	0.56(0.64)	Single winding
		1320±20%	2.7(2.34)	0.85(1.05)	0.40(0.45)	Leads connected in series
		330±20%	675m(585m)	1.7(2.1)	0.83(0.94)	Leads connected in parallel

Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor
CDRCH12D78B

Part Name	Stamp	Inductance (μH) [within] ※1	D.C.R. (Ω) Max. (Typ.)	Saturation Current (A) Max. (Typ.) ※2	Temperature rise current (A) Max. (Typ.) ※3	Mode
CDRCH12D78BNP-471MC	471	470±20%	2.01(1.75)	1.5(1.75)	0.45(0.52)	Single winding
		1880±20%	4.02(3.50)	0.75(0.88)	0.31(0.35)	Leads connected in series
		470±20%	1005m(875m)	1.5(1.75)	0.67(0.76)	Leads connected in parallel

※1 Measuring frequency inductance at 100KHz.

※2 Saturation current: The value of D.C. current when the inductance is over 70% of the initial value.


※3 Temperature rise current: The value of D.C. current when the temperature rise is △t=40℃.(Ta=20℃)


Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.


SMD Power Inductor
CDRCH12D78B


Saturation Current & Temperature Rise Graph — L (20℃) — ⊿T


Single winding inductor

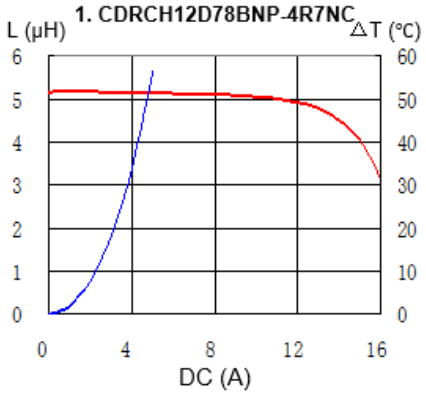


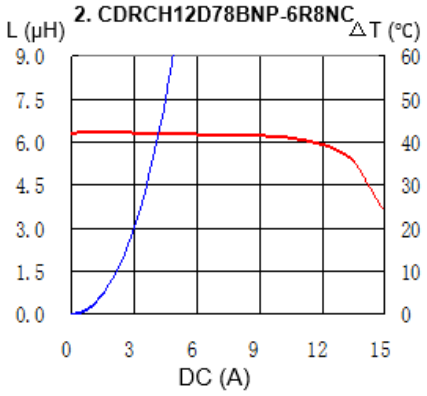


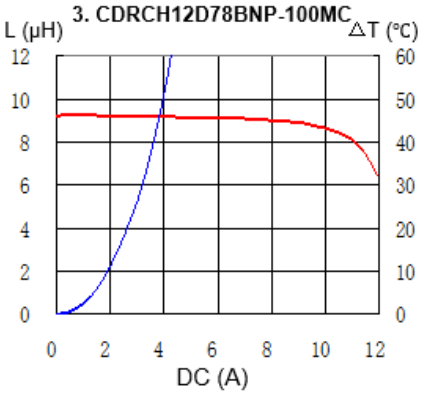


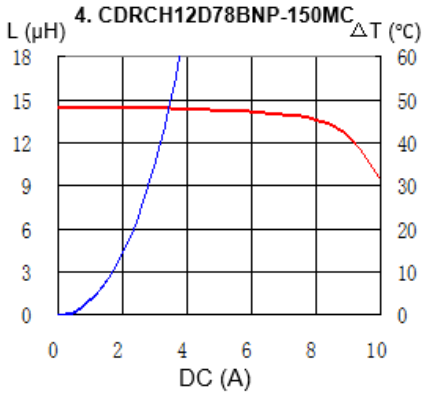


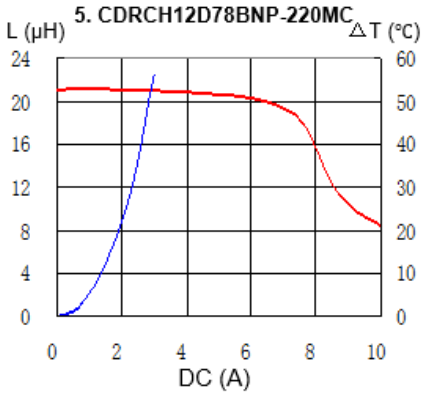

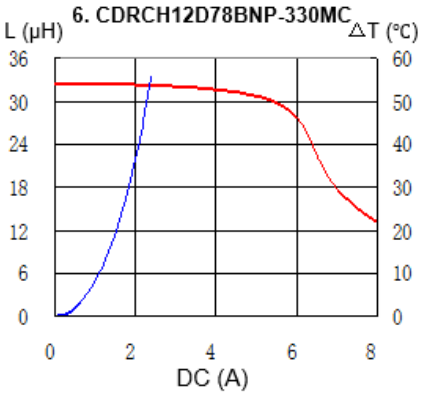

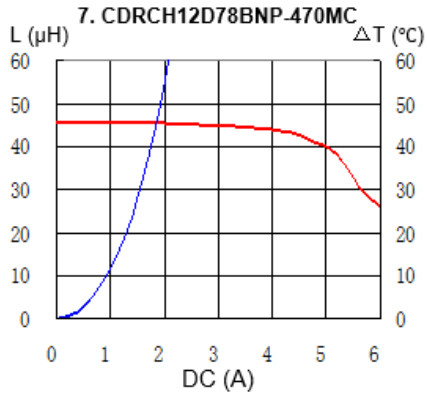

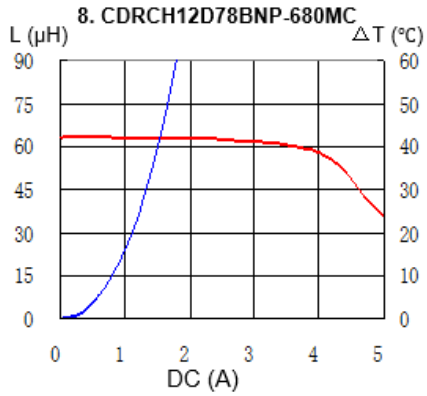

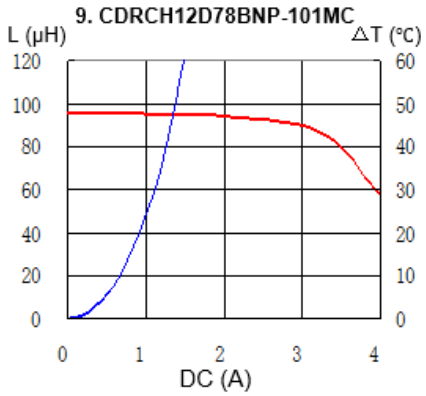


Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor
CDRCH12D78B


Saturation Current & Temperature Rise Graph — L (20℃) — ⊿T

Single winding inductor


10. CDRCH12D78BNP-151MC

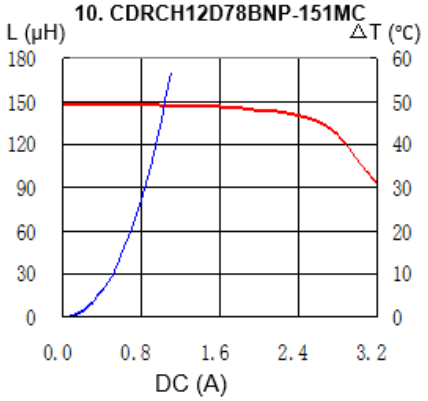


11. CDRCH12D78BNP-221MC

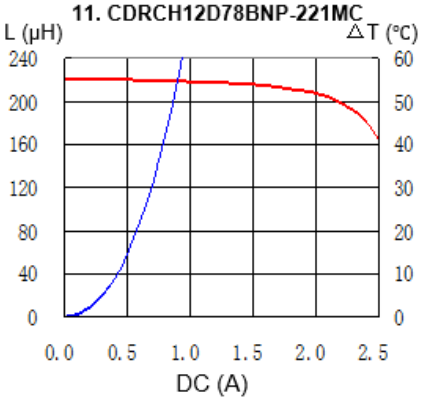

12. CDRCH12D78BNP-331MC

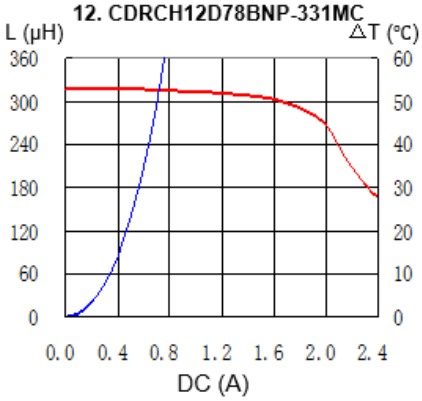

13. CDRCH12D78BNP-471MC

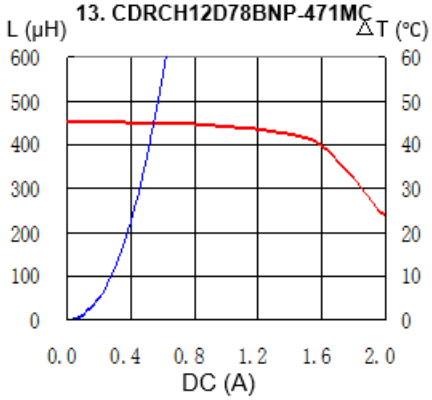

Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.


SMD Power Inductor

CDRCH12D78B


Saturation Current & Temperature Rise Graph — L (20℃) — ⊿T

Leads connected in series Mode


1. CDRCH12D78BNP-4R7NC

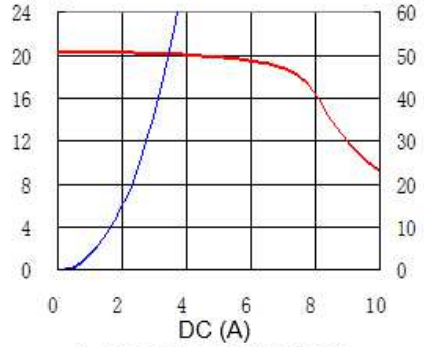


2. CDRCH12D78BNP-6R8NC

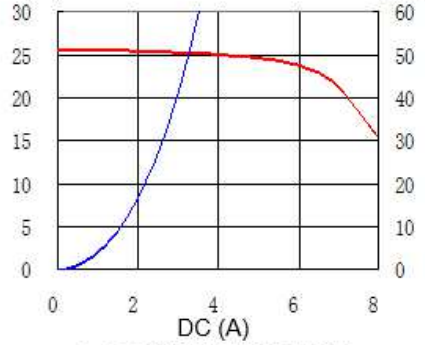


3. CDRCH12D78BNP-100MC

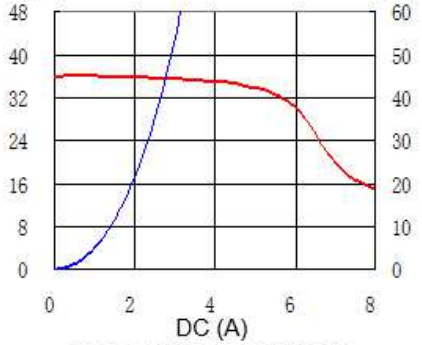


4. CDRCH12D78BNP-150MC

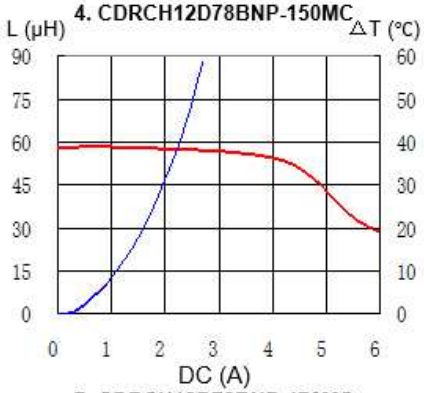


5. CDRCH12D78BNP-220MC

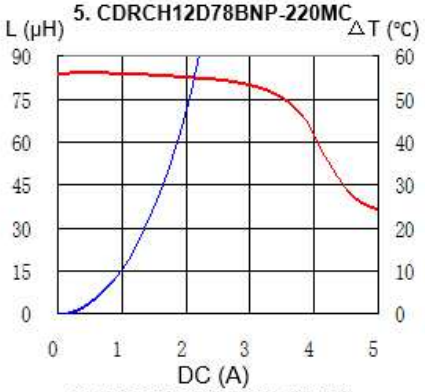


6. CDRCH12D78BNP-330MC

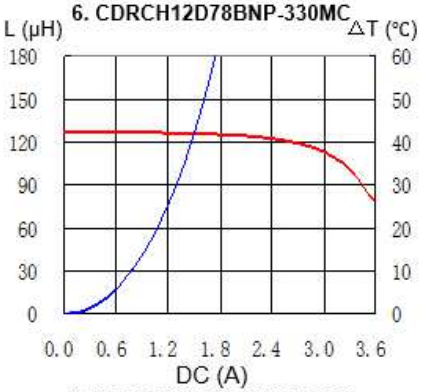


7. CDRCH12D78BNP-470MC

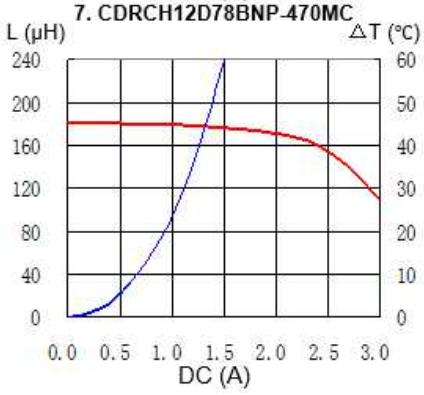

8. CDRCH12D78BNP-680MC

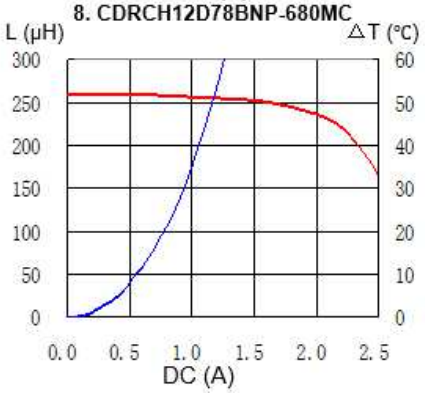

9. CDRCH12D78BNP-101MC

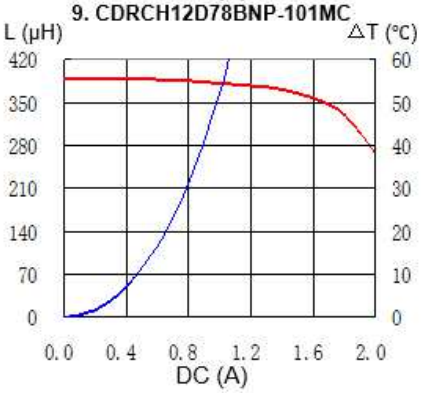


Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor
CDRCH12D78B


Saturation Current & Temperature Rise Graph — L (20℃) — ⊿T

Leads connected in series Mode


10. CDRCH12D78BNP-151MC

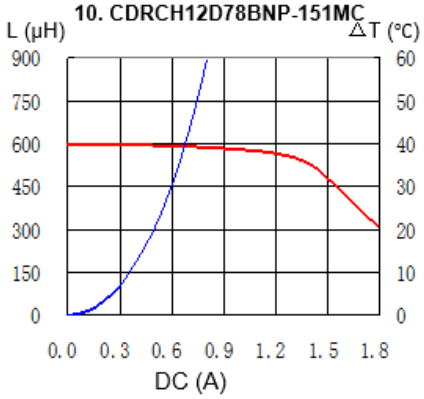


11. CDRCH12D78BNP-221MC

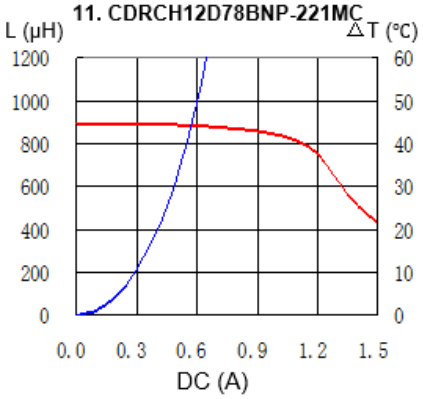

12. CDRCH12D78BNP-331MC

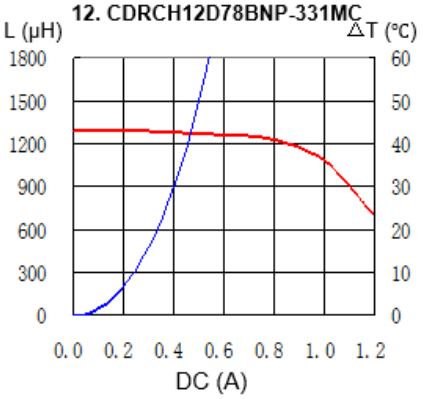

13. CDRCH12D78BNP-471MC

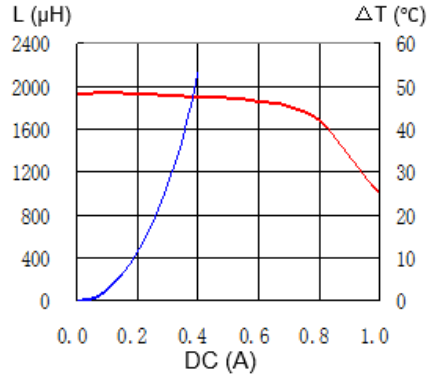


Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor
CDRCH12D78B


Saturation Current & Temperature Rise Graph — L (20℃) — ⊿T

Leads connected in parallel Mode


1. CDRCH12D78BNP-4R7NC

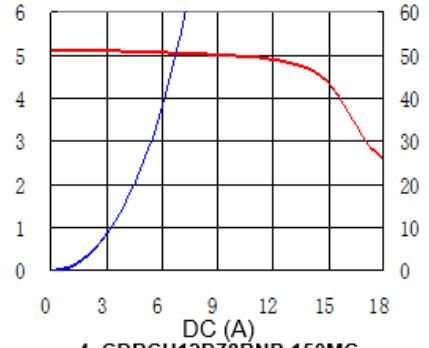


2. CDRCH12D78BNP-6R8NC

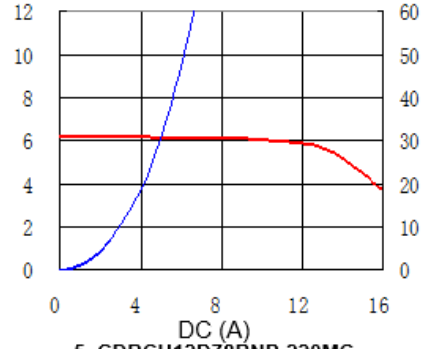


3. CDRCH12D78BNP-100MC

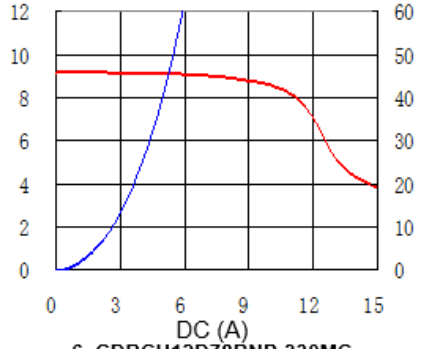


4. CDRCH12D78BNP-150MC

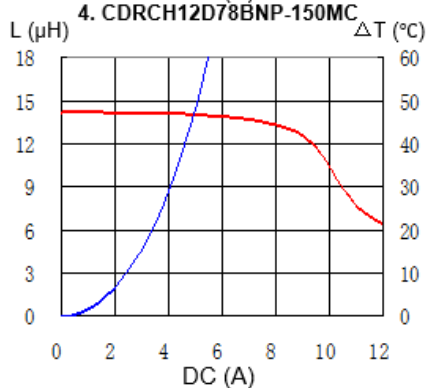


5. CDRCH12D78BNP-220MC

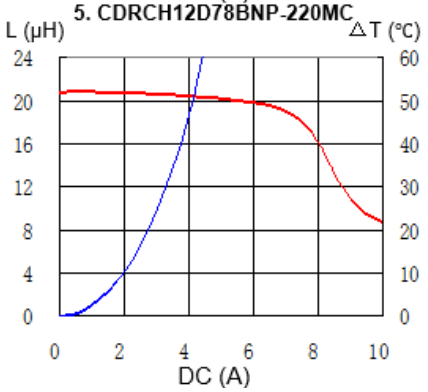


6. CDRCH12D78BNP-330MC

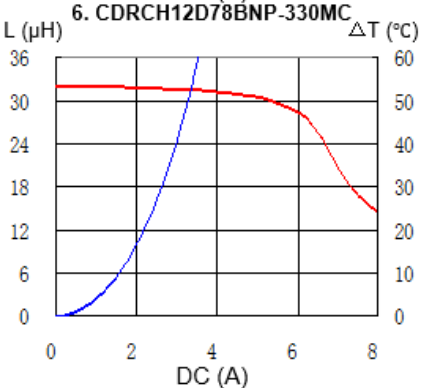


7. CDRCH12D78BNP-470MC

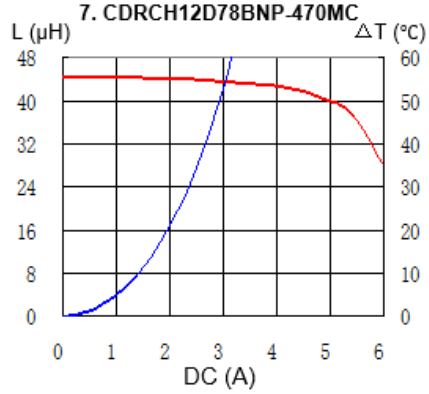

8. CDRCH12D78BNP-680MC

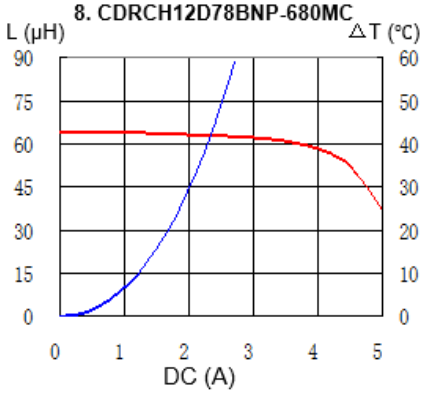

9. CDRCH12D78BNP-101MC

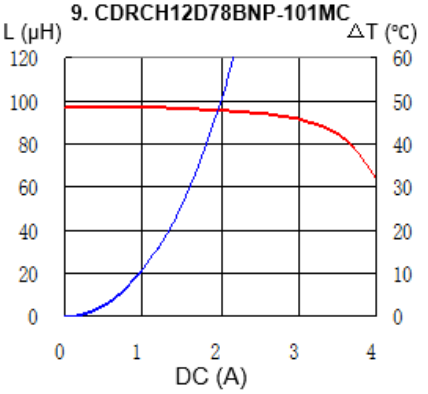



Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.


SMD Power Inductor
CDRCH12D78B


Saturation Current & Temperature Rise Graph — L (20℃) — ⊿T

Leads connected in parallel Mode

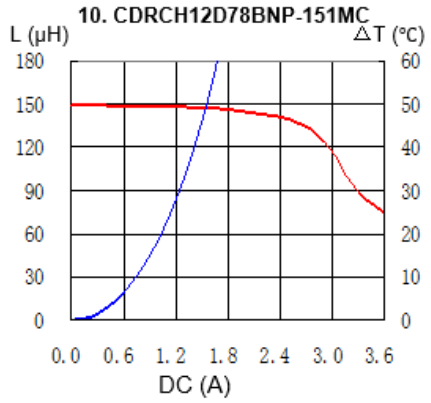


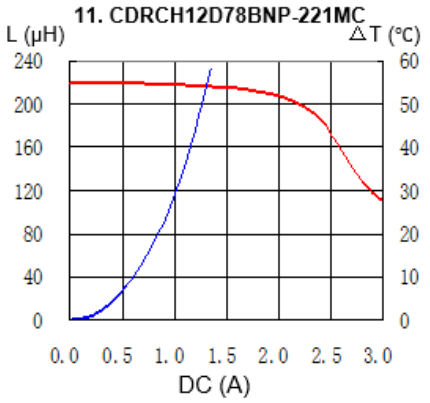


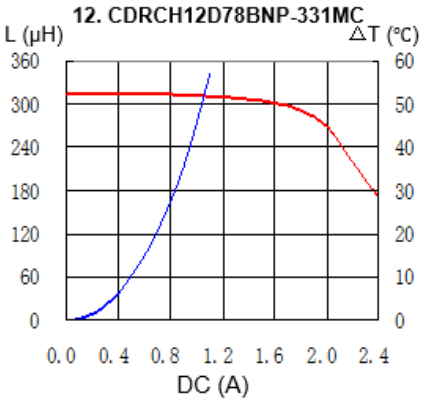

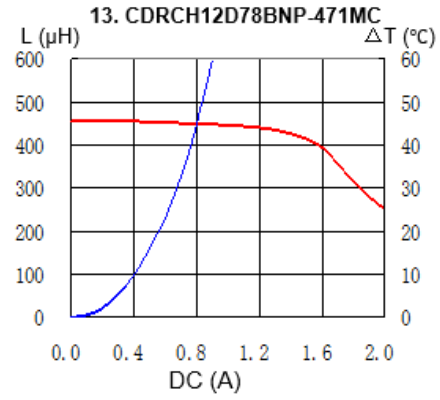

Solder Reflow Condition

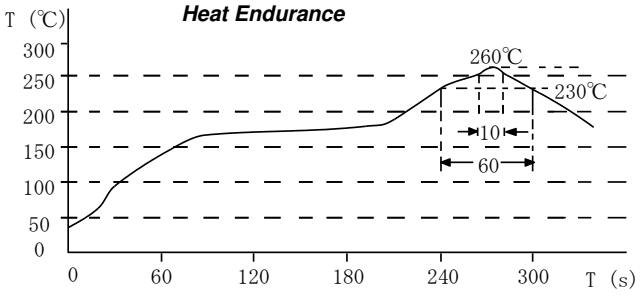

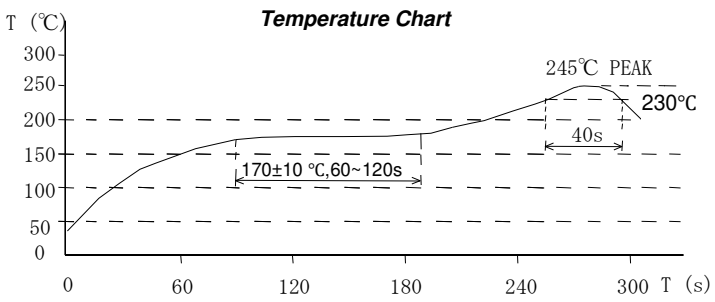

For sales office information, please visit our website (https://www.sumida.com/).

Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.