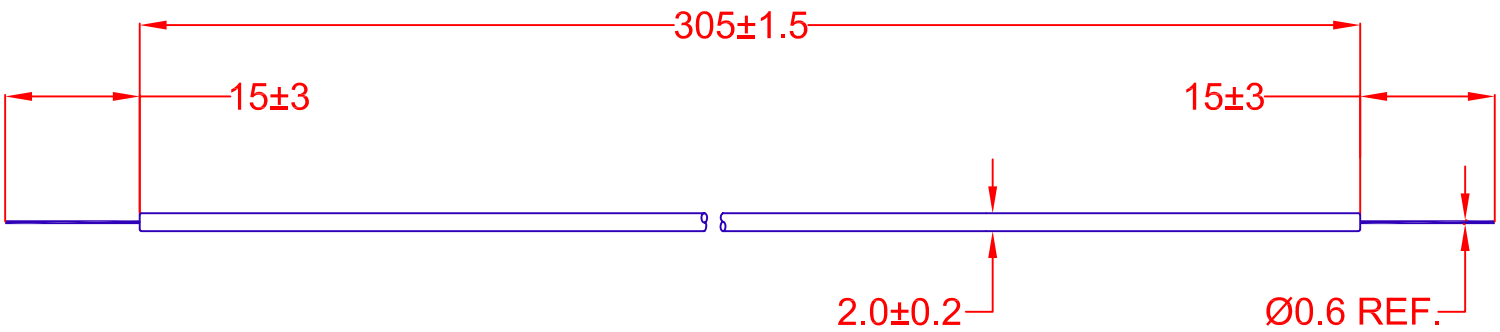


JKL PART NO.: CF20305-24B

JKL LAMP PART NO.	COLOR WHITE	STARTING CIRCUIT VOLTAGE VS (Vrms)	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mArms)	BRIGHTNESS (CANDELA/m2)	*RATED LIFE (HRS) (AVG.)
CF20305-24B	x = 0.278±0.01 y = 0.264±0.01	1750 @ 0°C	780	5	42,000 TYP.	40,000

* RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OFTHE INITIAL RATING.

REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE
A	START VOLTS TO 2600 & OPER. VOLT TO 1400	8/23/07
	RELEASED	11/10/05

METRIC
THIRD ANGLE PROJECTION

DIMENSIONS ARE IN MILLIMETERS
TOLERANCE UNLESS OTHERWISE SPECIFIED
1 PL +/- 0.2
2 PL +/- 0
ANGLE +/- 0

DRAWN BY L. WENGSTROM | APPV'D BY L.R. | DATE 8/28/07

- CAD DRAWING -
MANUAL REVISIONS NOT PERMITTED

JKL COMPONENTS CORPORATION

TITLE
MINIATURE COLD CATHODE FLUORESCENT LAMP

SIZE A | FSCM NO. 55335 | DRAWING NO. CF20305-24B

SCALE NONE | RELEASED DATE 11/10/05 | REVISION DATE 8/28/07 | REV. NO. A | SHEET 1 OF 1