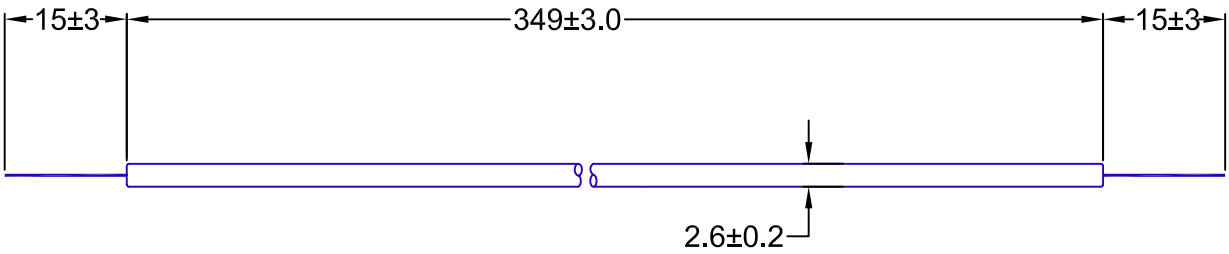

JKL LAMP PART NO. (REFERENCE)	COLOR	STARTING CIRCUIT VOLTAGE VS (Vrms) @ 0°C	OPERATING LAMP VOLTAGE VL (Vrms) @ 25°C	OPERATING LAMP CURRENT IL (mArms)	BRIGHTNESS (CANDELA/m2)	*RATED LIFE (HRS) MINIMUM
CF26349-28B	x = .325 y = .295	1715	730	5 ± 1	30,000 ± 3000	20,000

* RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OFTHE INITIAL RATING.

REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE
A	RATED LIFE HRS MINIMUM HEADING & 20,000	8/5/09
	RELEASED & CANCEL P-0210-08 & BF26349-28B	1/29/03

METRIC
THIRD ANGLE PROJECTION

DIMENSIONS ARE IN MILLIMETERS
TOLERANCE UNLESS OTHERWISE SPECIFIED
1 PL +/- 0.2
2 PL +/- 0.20
ANGLE +/- 0

DRAWN BY L. WENGSTROM | APPV'D BY L.R. | DATE 8/5/09

- CAD DRAWING -
MANUAL REVISIONS NOT PERMITTED

JKL COMPONENTS CORPORATION

TITLE
MINIATURE COLD CATHODE FLUORESCENT LAMP

SIZE A | FSCM NO. 55335 | DRAWING NO. CF26349-28B

SCALE NONE | RELEASED DATE 1/29/03 | REVISION DATE 8/5/09 | REV. NO. A | SHEET 1 OF 1