

NOTES:
1. MOUNTING: Mounts in a Ø.250±.002 [Ø6.35mm±.05] panel hole on .375 [9.5mm] centers. Panel thickness .031 [.8 mm] to .250 [6.35mm]. Panel hole should be deburred, but not chamfered.
2. ASSEMBLY: Insert lens through panel hole, (for thin panels less than .188 [4.75mm] thick, slide SPC 125 spacer on back of lens), and insert LED into lens.
3. MATERIAL: Polycarbonate, UL 94-V2
4. U.S. & Foreign Pat. Issued & Pend.


| REVISIONS | | | | |
|---|---|---|---|---|
| ECN# | REV. | DESCRIPTION | DATE | INITIALS |
| | 1 | CHANGE LENS DESIGN FROM FRESNEL TO PLAIN, ADD UL RATING TO MATERIAL | 1-7-10 | KH |
| | 001 | REVISED PER ECR111009AZ01 | 4-23-10 | SMU |


SPACER
(ORDER SEPARATELY)



SPC 125

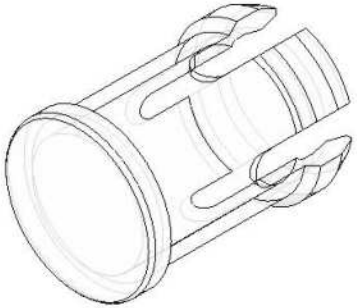




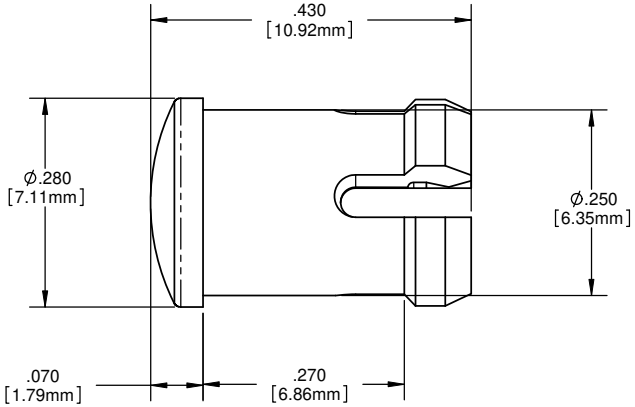


ORDERING CODE : CLR301 XXX

MODEL

| LENS COLOR | |
|---|---|
| RTP | RED TRANSPARENT |
| ATP | AMBER TRANSPARENT |
| GTP | GREEN TRANSPARENT |
| BTP | BLUE TRANSPARENT |
| YTP | YELLOW TRANSPARENT |
| CTP | CLEAR TRANSPARENT |




ASSEMBLY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES:
ANGLES ±1° DECIMALS .X ±.020 .XX ±.010 .XXX ±.005
FINISH
BREAK ALL CORNERS AND SHARP EDGES .020 MAX
THIRD ANGLE PROJECTION

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VISUAL COMMUNICATIONS COMPANY, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VISUAL COMMUNICATIONS COMPANY, INC IS PROHIBITED.

MATERIAL: POLYCARBONATE, UL 94-V2
FINISH: SEE NOTES

| APPROVAL | DATE |
|---|---|
| DRAWN: SMU | 4-23-10 |
| CHECKED: DZ | 4-23-10 |

DO NOT SCALE DRAWING

VISUAL COMMUNICATIONS COMPANY, INC.
190 Bosstick Boulevard, Suite101 San Marcos, CA 92069 USA
Phone (760) 560-1300 Fax (760) 560-1301 email vccsales@vcclite.com

TITLE: 5MM ROUND LOW PROFILE PLAIN LENS

| SIZE | DWG. NO. | REV |
|---|---|---|
| B | CLR 301 XXX | 001 |

SCALE: 1:1 SHEET 1 OF 1