
# DUALSLIM USB2.0 A-A METAL FRAME FEEDTHROUGH CONNECTOR

Can be front or rear mounted in the panel



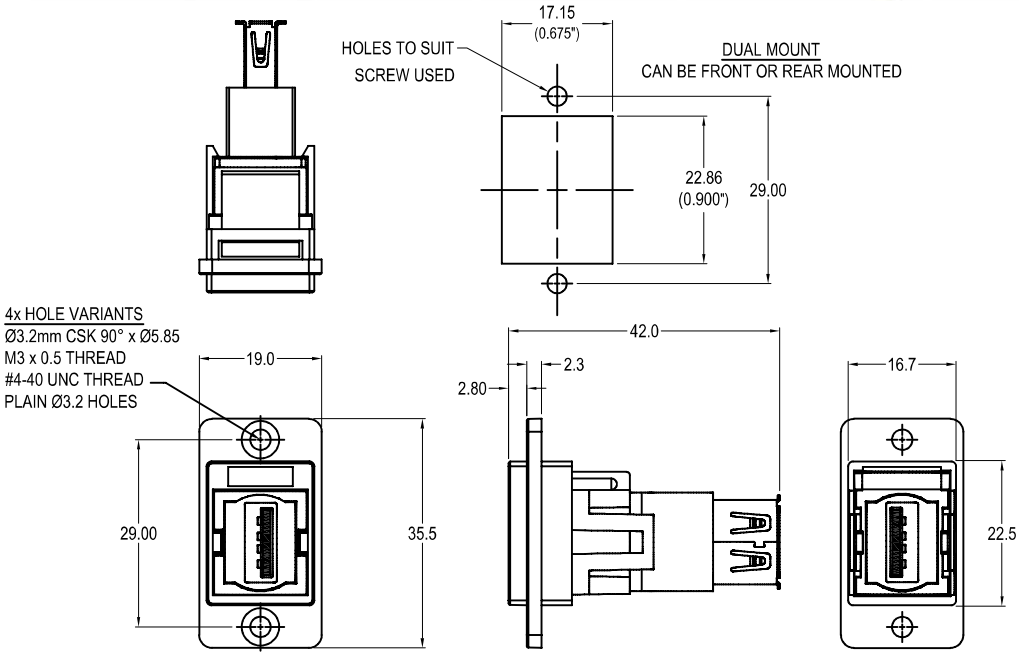


**VARIANTS**

| Part No. | |
|---|---|
| **CP30708NM** | DUALSLIM USB2.0 A-A Nickel frame, CSK holes |
| **CP30708NMB** | DUALSLIM USB2.0 A-A Black metal frame, CSK holes |
| **CP30708NM3** | DUALSLIM USB2.0 A-A Nickel frame, M3 holes |
| **CP30708NMB3** | DUALSLIM USB2.0 A-A Black metal frame, M3 holes |
| **CP30708NM440** | DUALSLIM USB2.0 A-A Nickel frame, #4-40 holes |
| **CP30708NMB440** | DUALSLIM USB2.0 A-A Black metal frame, #4-40 holes |
| **CP30708NMX1** | DUALSLIM USB2.0 A-A Nickel frame, Ø3.2 PLAIN holes |
| **CP30708NMBX1** | DUALSLIM USB2.0 A-A Black metal frame, Ø3.2 PLAIN holes |

Feedthrough Features

- Fits standard rectangular cutout.
- Front or rear mounting through the panel.
- Various hole mounting options.
- No soldering or punch termination. Use standard cable for each connector style.
- Low rear profile.

General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

Material:

1. Insert: ABS UL94 HB
2. Frame: Diecast, Nickel or Black plated
3. Inner Overmouldings: PE + PVC
4. Shell: Nickel plated steel
5. Contacts: Gold Plated

Notes:

1. Voltage rating: 30V ac
2. Current rating: 1.5 A max
3. Contact resistance: 50mΩ max
4. Insulation resistance: 20MΩ min
5. Dielectric withstanding voltage: 500V AC
6. Operating Temperature: -20°C to 50°C

© CLIFF 02/2021 ISS.1

For further information, contact sales@cliffuk.co.uk

**Cliff Electronic Components Limited,**
76 Holmethorpe Avenue, Holmethorpe Ind. Estate,
Redhill, Surrey RH1 2PF U.K.
Tel: +44 (0)1737 771375 Fax: +44 (0)1737 766012

RoHS

www.cliffuk.co.uk