
DUALSLIM USB-C Female-Male METAL FRAME FEEDTHROUGH CONNECTOR

Can be front or rear mounted in the panel



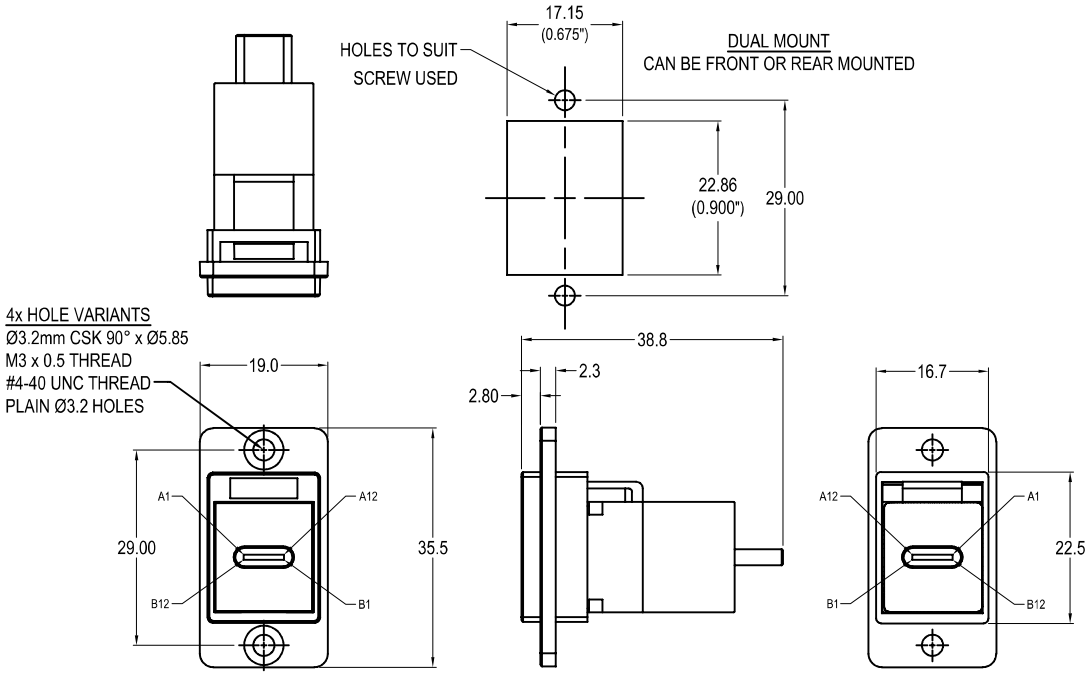

VARIANTS

Part No.	
CP30711M	DUALSLIM USB-C F-M Nickel frame, CSK holes
CP30711MB	DUALSLIM USB-C F-M Black metal frame, CSK holes
CP30711M3	DUALSLIM USB-C F-M Nickel frame, M3 holes
CP30711MB3	DUALSLIM USB-C F-M Black metal frame, M3 holes
CP30711M440	DUALSLIM USB-C F-M Nickel frame, #4-40 holes
CP30711MB440	DUALSLIM USB-C F-M Black metal frame, #4-40 holes
CP30711MX1	DUALSLIM USB-C F-M Nickel frame, Ø3.2 PLAIN holes
CP30711MBX1	DUALSLIM USB-C F-M Black metal frame, Ø3.2 PLAIN holes

Feedthrough Features

- Fits standard rectangular cutout.
- Front or rear mounting through the panel.
- Various hole mounting options.
- No soldering or punch termination. Use standard cable for each connector style.
- Low rear profile.

General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

Material:

1. Insert: ABS - UL94 HB
2. Frame: Diecast, Nickel or Black plated

USB-C Specification:

Maximum Rated Current - 3A
Maximum Working Voltage - 30V
Withstanding Voltage - 100V for 1 minute.
Contact Resistance - 40 Milli-ohms Max.
Insulation Resistance - 100 Mega-ohms Min.
Insulator Flammability Rating - UL-94V0
Insertion Life - 10,000 Cycles.

© CLIFF 02/2021 ISS.1

For further information, contact sales@cliffuk.co.uk

Cliff Electronic Components Limited,
76 Holmethorpe Avenue, Holmethorpe Ind. Estate,
Redhill, Surrey RH1 2PF U.K.
Tel: +44 (0)1737 771375 Fax: +44 (0)1737 766012

RoHS

www.cliffuk.co.uk