Toll Free (877) STL-TIES
(785-8437)


www.hayata.com


HAYATA, LTD.
2707 Realty Rd., #306
Carrollton, TX 75006
Tel: (214) 360-7708
Fax: (214) 360-7718

CT-3 STAINLESS STEEL CABLE TIE INSTALLATION TOOL

OPERATING INSTRUCTIONS

TOOL SHIPPED FULLY ASSEMBLED

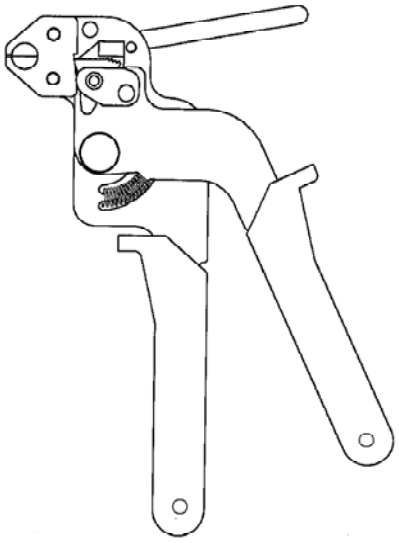

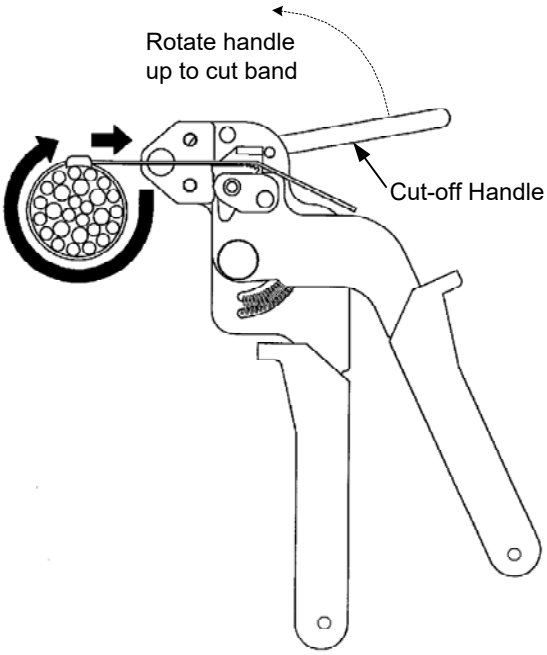

TOOL MAINTENANCE

TO INHIBIT CORROSION AND MAINTAIN PERFORMANCE OF THE TOOL, KEEP THE METAL SURFACE COATED WITH A LIGHT OIL (WD-40® OR EQUIVALENT).

NOTE: This precision tool cuts Ladder Ties (KST) and RollerBall Ties (TBC), Coated and Uncoated up to ½" width. It has been engineered and designed for use with Hayata's Standard and Heavy Duty Stainless Steel Cable Ties. It is not intended for other uses such as cutting or tensioning other types of fastening devices.

Tensions and cuts Ladder Ties (KST) and RollerBall Ties (TBC), Coated and Uncoated, up to ½" (13mm) width.

OPERATION

1. Loop cable tie around bundle and insert tip through head. Pull tie up snug on bundle by hand.
2. Place tool on tie as shown.
3. Squeeze handles as many times as necessary to tighten tie to the desired tension.
4. While maintaining final handle pressure from Step 3, rotate cut-off handle up, until excess tail is cut-off. Remove cut-off portion from tool.

1021
LDW | 10/21/20