
THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
–	CLASS A RELEASED	7/11/99	

1. 4mm NON–INSULATED BINDING POST, SOLDER TURRET
2. SPECIFICATIONS:
   INSULATOR: POLYAMIDE (NYLON)
   JACK BODY: BRASS, NICKEL PLATED
   NUT: BRASS, NICKEL PLATED, 2 PIECES
3. RATING:
   VOLTAGE: 1,200V AC/DC
   CURRENT: 36A MAX.
   TEMPERATURE: –20° C TO +80° C.
4. MOUNTING HOLE: REFERENCE DIAGRAM.
5. MAXIMUM PANEL THICKNESS: .60 (15.2)

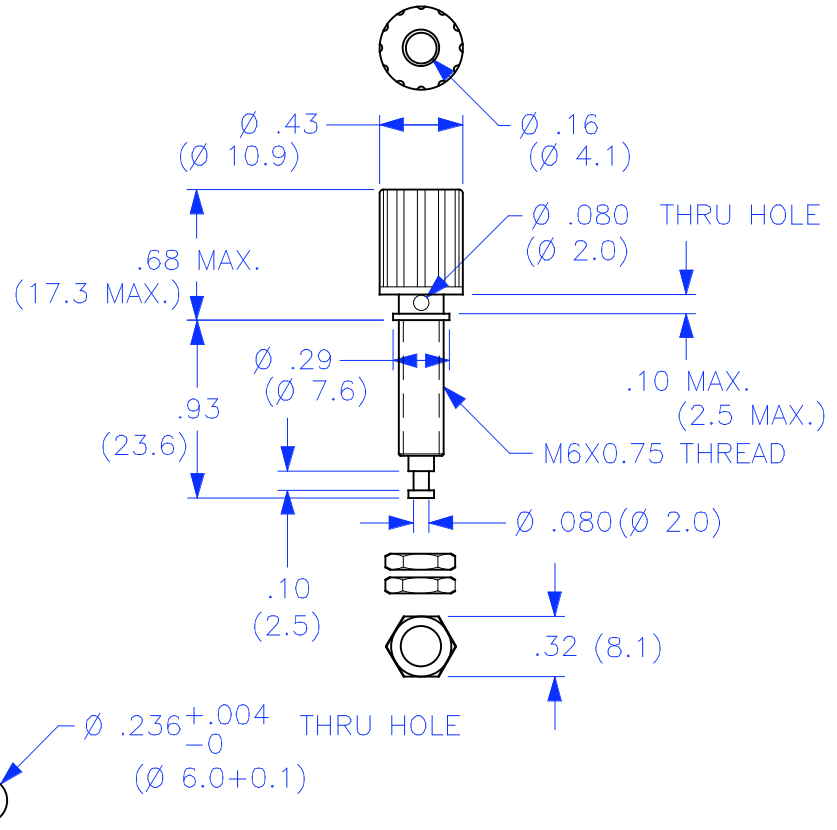

PART NUMBER

CT2234–#

COLOR:
0 – BLACK
2 – RED
4 – YELLOW
5 – GREEN
6 – BLUE
9 – WHITE

THIRD ANGLE PROJECTION

NEXT ASSY | USED ON

APPLICATION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS ± 1/32 DECIMALS .XX ± .02 .XXX ±.005
DO NOT SCALE DRAWING

MATERIAL

FINISH

CONTRACT NO.

APPROVALS	DATE
DRAWN WDH	7/11/99
CHECKED	
ENGR.	
DESIGN ACTIVITY	

Cal Test Electronics
22820 Savi Ranch Parkway
Yorba Linda, CA 92887-4610

TITLE: 4mm NON–INSULATED BINDING POST, SOLDER TURRET

SIZE	CAGE CODE	DWG. NO.	REV.
A	43F45	P223400	–

SCALE 1:1 SHEET 1 OF 1