
THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
—	CLASS A RELEASED	7/12/99	
A	REVISED CONFIGURATION & MATL. MOUNTING HOLE. NEW TOOLING.	4/18/04	

1. PUSH–IN SAFETY SOCKET w/Ø .080 (Ø 2.0) SOLDER FORK.
2. SPECIFICATIONS:
   INSULATOR: POLYAMIDE (NYLON)
   CONTACT: BRASS, NICKEL PLATED
3. RATING:
   VOLTAGE: 1,000V CATIII P2 (IEC61010–1)
   CURRENT: 25A MAX.
   RESISTANCE: <5mΩ.
   TEMPERATURE: –20° C TO +80° C.
4. MOUNTING HOLE: REF. DIAGRAM.

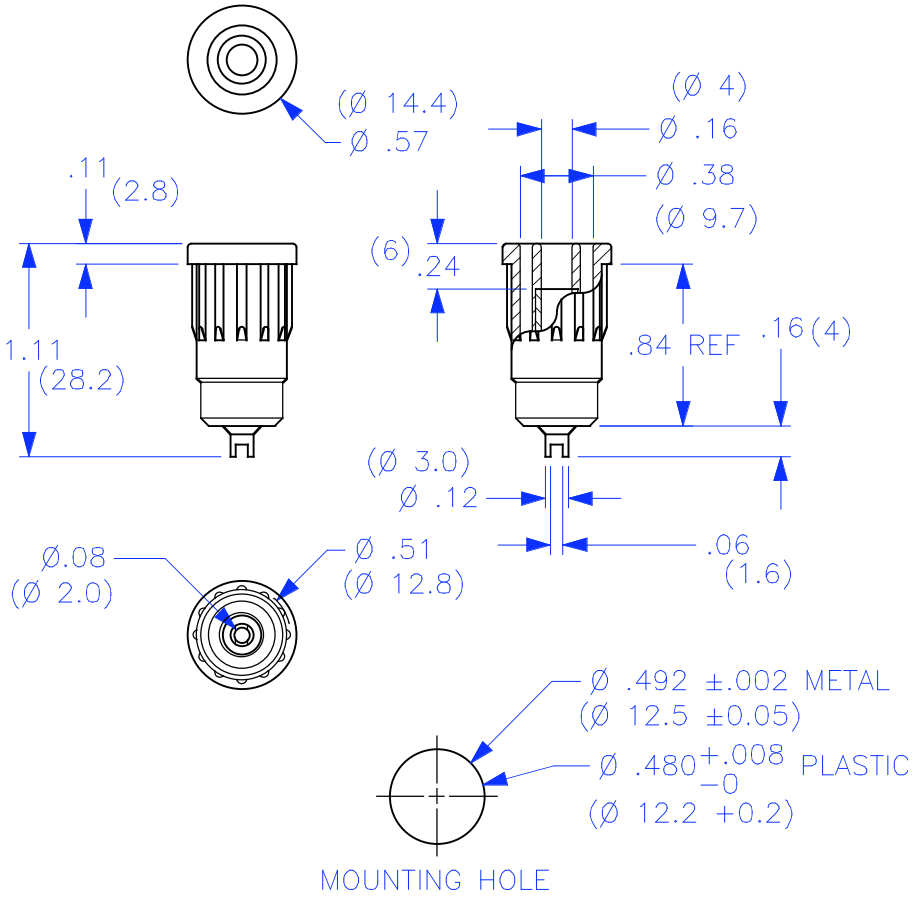

PART NUMBER

CT2245–#

COLOR:
0 – BLACK
1 – BROWN
2 – RED
3 – ORANGE
4 – YELLOW
5 – GREEN
6 – BLUE
7 – PURPLE
8 – GRAY
9 – WHITE

THIRD ANGLE PROJECTION

NEXT ASSY | USED ON

APPLICATION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS ± 1/32 DECIMALS .XX ± .02 .XXX ±.005
DO NOT SCALE DRAWING

MATERIAL

FINISH

CONTRACT NO.

APPROVALS	DATE
DRAWN WDH	7/12/99
CHECKED	
ENGR.	
DESIGN ACTIVITY	

Cal Test Electronics
22820 Savi Ranch Parkway
Yorba Linda, CA 92887-4610

TITLE: 4mm PUSH–IN SAFETY SOCKET, w/Ø .080 SOLDER FORK

SIZE	CAGE CODE	DWG. NO.	REV.
A	43F45	P224500	A

SCALE 1:1 SHEET 1 OF 1