DiTom MICROWAVE INC.

Part Number: D3C3841Q


Electrical Specifications

Frequency Range (GHz):	38.0 – 41.0	
Isolation (dB):	17	MIN
Insertion Loss (dB):	1.0	MAX
VSWR:	1.3:1	MIN
Forward Power (W):	5	AVG
	30	PK

Mechanical/Environmental Specifications


Connector Type:	2.4mm
Connector Body:	Passivated stainless steel
Connector Pin:	Gold plated copper
Load Body:	Brass
Magnetic Shunt:	Nickel plated CRS
Operational Temp:	-20˚C to +65˚C
Weight (oz)	0.9 MAX

D3C3841Q Dimensions

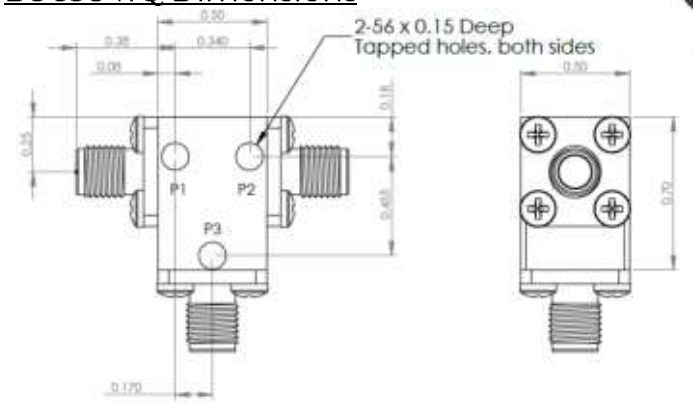



D3C3841Q-3 Dimensions

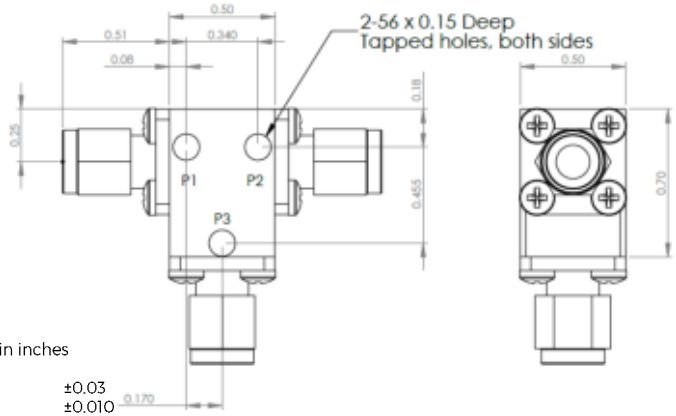

Dimensions are in inches
Tolerance
XX ±0.03
XXX ±0.010

Type of Device	PN Suffix	Connector Configuration Input / Output	PN Example
Single Junction Circulator 3-Port Device Port 1 / Port 2 / Port 3	No Dash	Female / Female / Female	D3C3841Q
	-1	Male / Female / Female	D3C3841Q-1
	-2	Female / Male / Female	D3C3841Q-2
	-3	Male / Male / Male	D3C3841Q-3
	-4	Female / Female / Male	D3C3841Q-4
	-5	Male / Female / Male	D3C3841Q-5
	-6	Male / Male / Female	D3C3841Q-6
	-7	Female / Male / Male	D3C3841Q-7


DiTom Microwave · 7592 N Maroa Ave Fresno, CA USA · PH +001-559-790-1130 · FAX +001-559-255-1667

Downloaded from Arrow.com.

DiTom MICROWAVE INC.

MEASURED DATA

Part Number: D3C3841Q, P1→P2, P3 Terminated with 50Ω, +25˚C

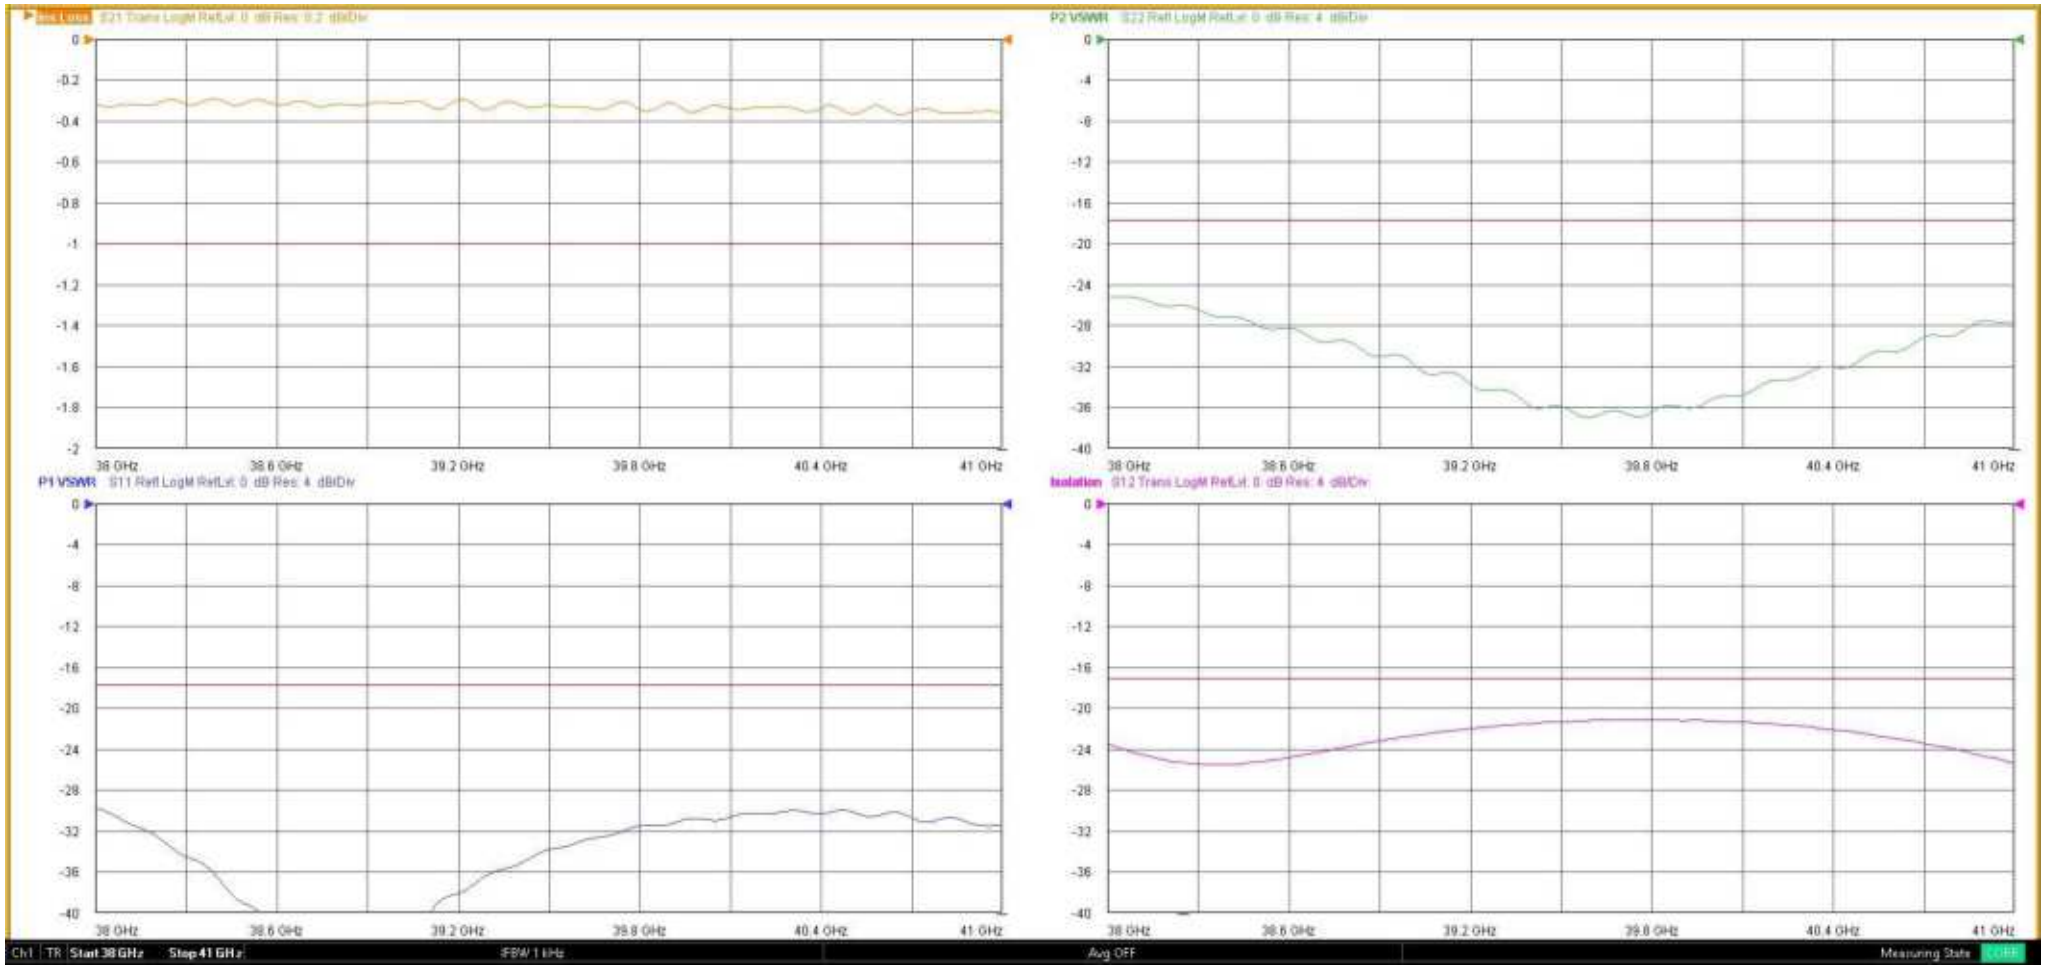

DiTom Microwave · 7592 N Maroa Ave Fresno, CA USA · PH +001-559-790-1130 · FAX +001-559-255-1667

Downloaded from Arrow.com.