
DiTom MICROWAVE INC.

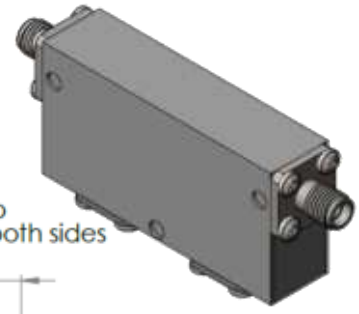

Part Number: D4I3783


Electrical Specifications

Frequency Range (GHz):	3.7 – 8.3	
Isolation (dB):	34	MIN
Insertion Loss (dB):	1.2	MAX
VSWR:	1.35:1	MIN
Forward Power (W):	20	AVG
	50	PK
Reflective Power (W):	2	AVG


Mechanical/Environmental Specifications

Connector Type:	SMA
Connector Body:	Passivated stainless steel
Connector Pin:	Gold plated copper
Load Body:	Brass
Magnetic Shunt:	Nickel plated CRS
Operational Temp:	0˚C to +50˚C
Weight (oz)	4.0 MAX

D4I3783 Dimensions

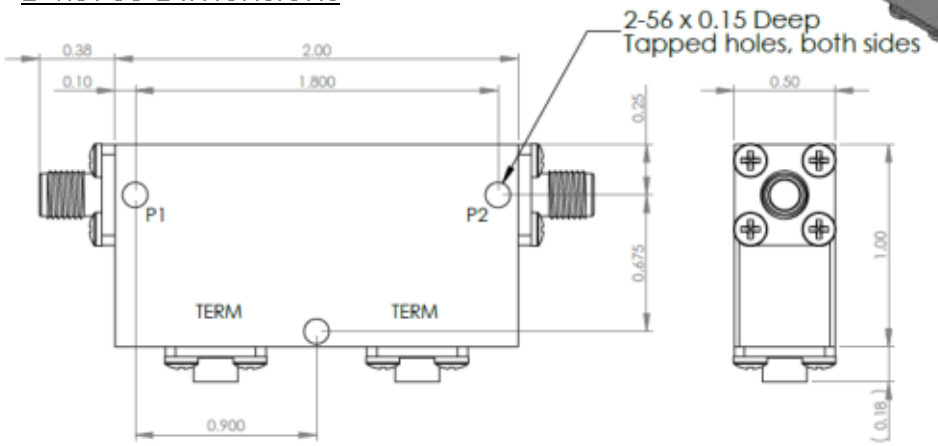

D4I3783-3 Dimensions

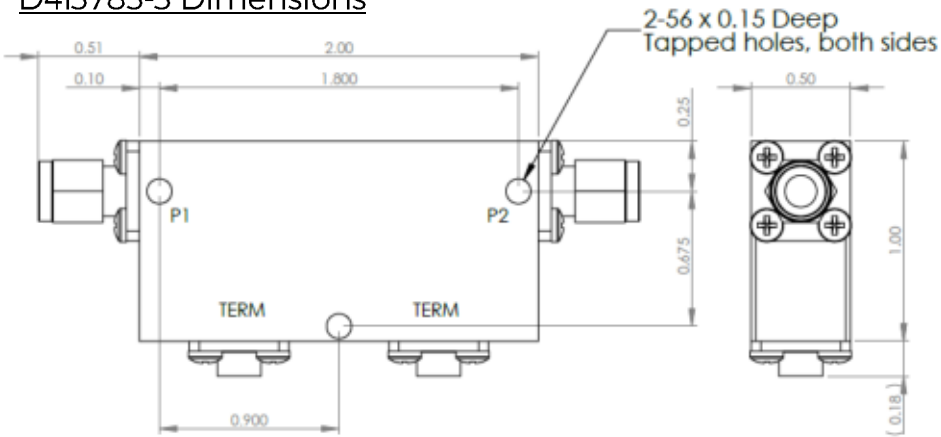

Dimensions are in inches
Tolerance
XX ±0.03
XXX ±0.010

Type of Device	PN Suffix	Connector Configuration Input / Output	PN Example
Single and Dual Junction Isolator, 2-Port Device Input / Output	N/A	Female / Female	D4I3783
	-1	Male / Female	D4I3783-1
	-2	Female / Male	D4I3783-2
	-3	Male / Male	D4I3783-3


DiTom Microwave · 7592 N Maroa Ave Fresno, CA USA · PH +001-559-790-1130 · FAX +001-559-255-1667

Downloaded from Arrow.com.

DiTom MICROWAVE INC.

MEASURED DATA

Part Number: D4I3783, +25˚C

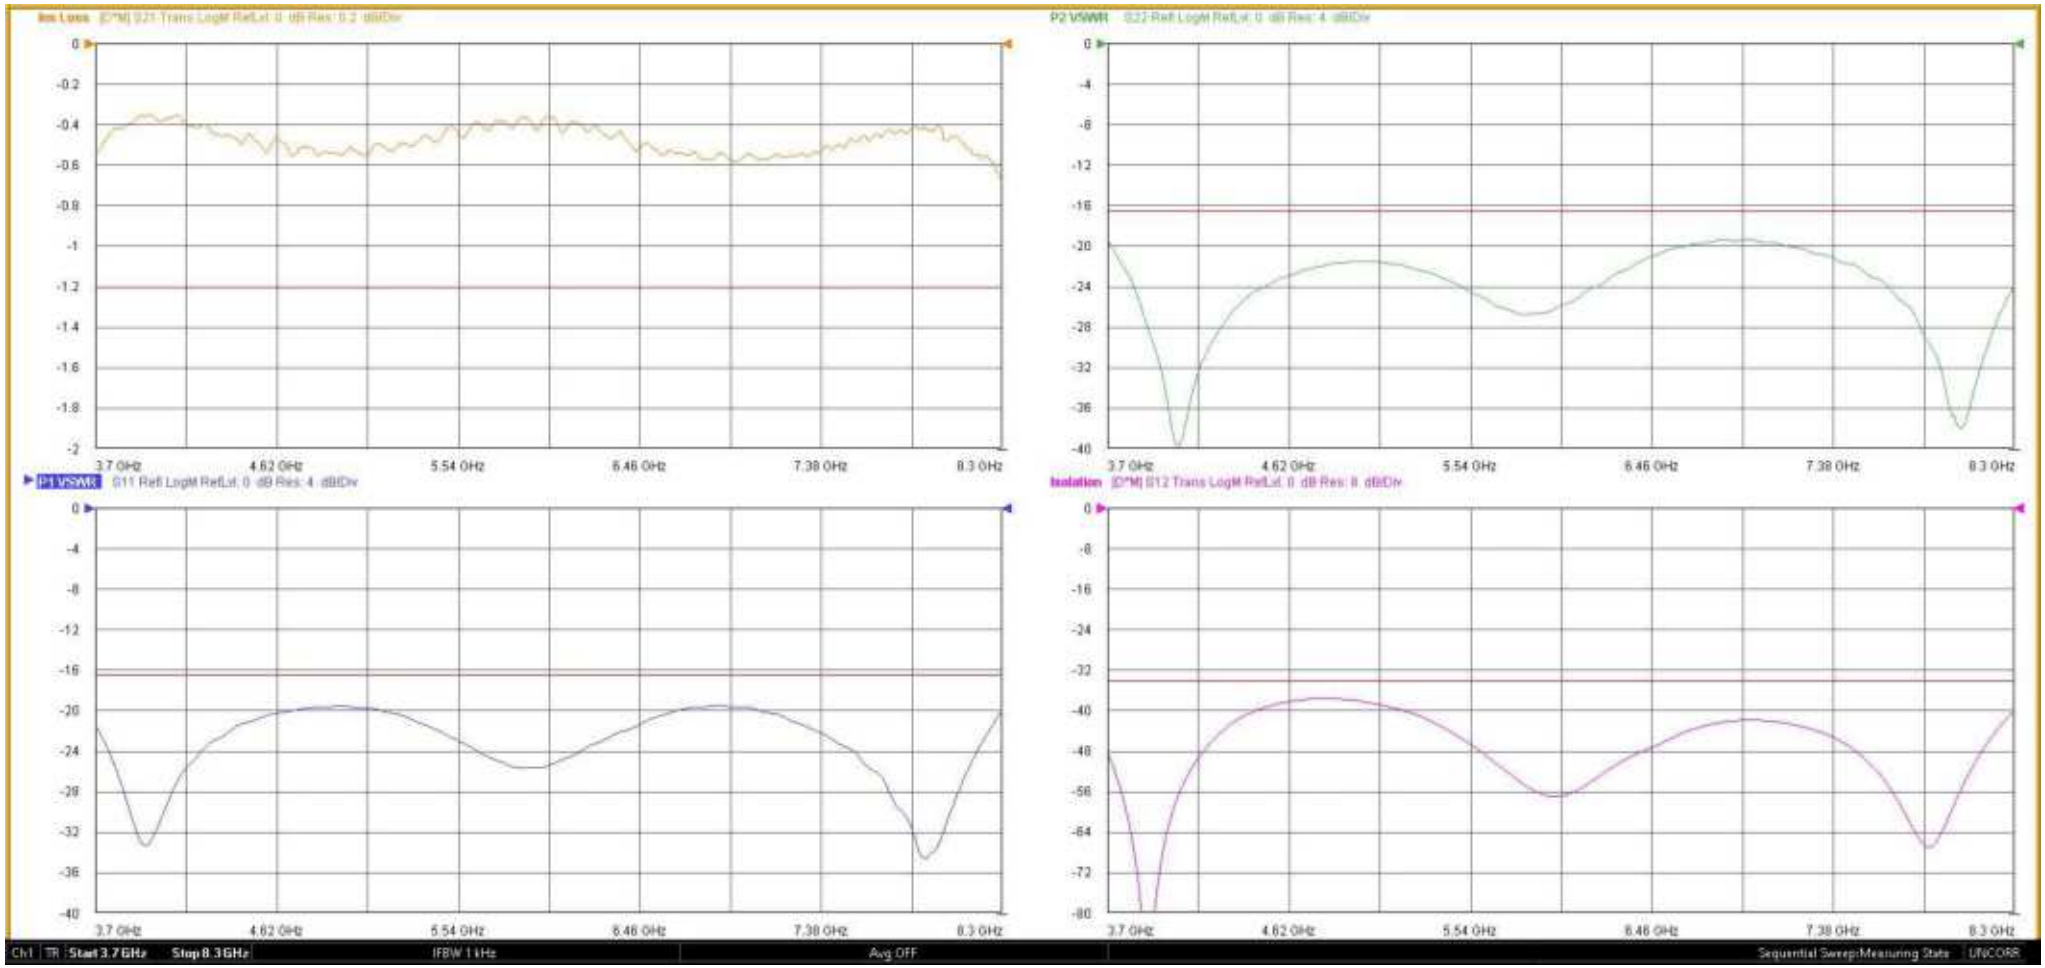

DiTom Microwave · 7592 N Maroa Ave Fresno, CA USA · PH +001-559-790-1130 · FAX +001-559-255-1667

Downloaded from Arrow.com.