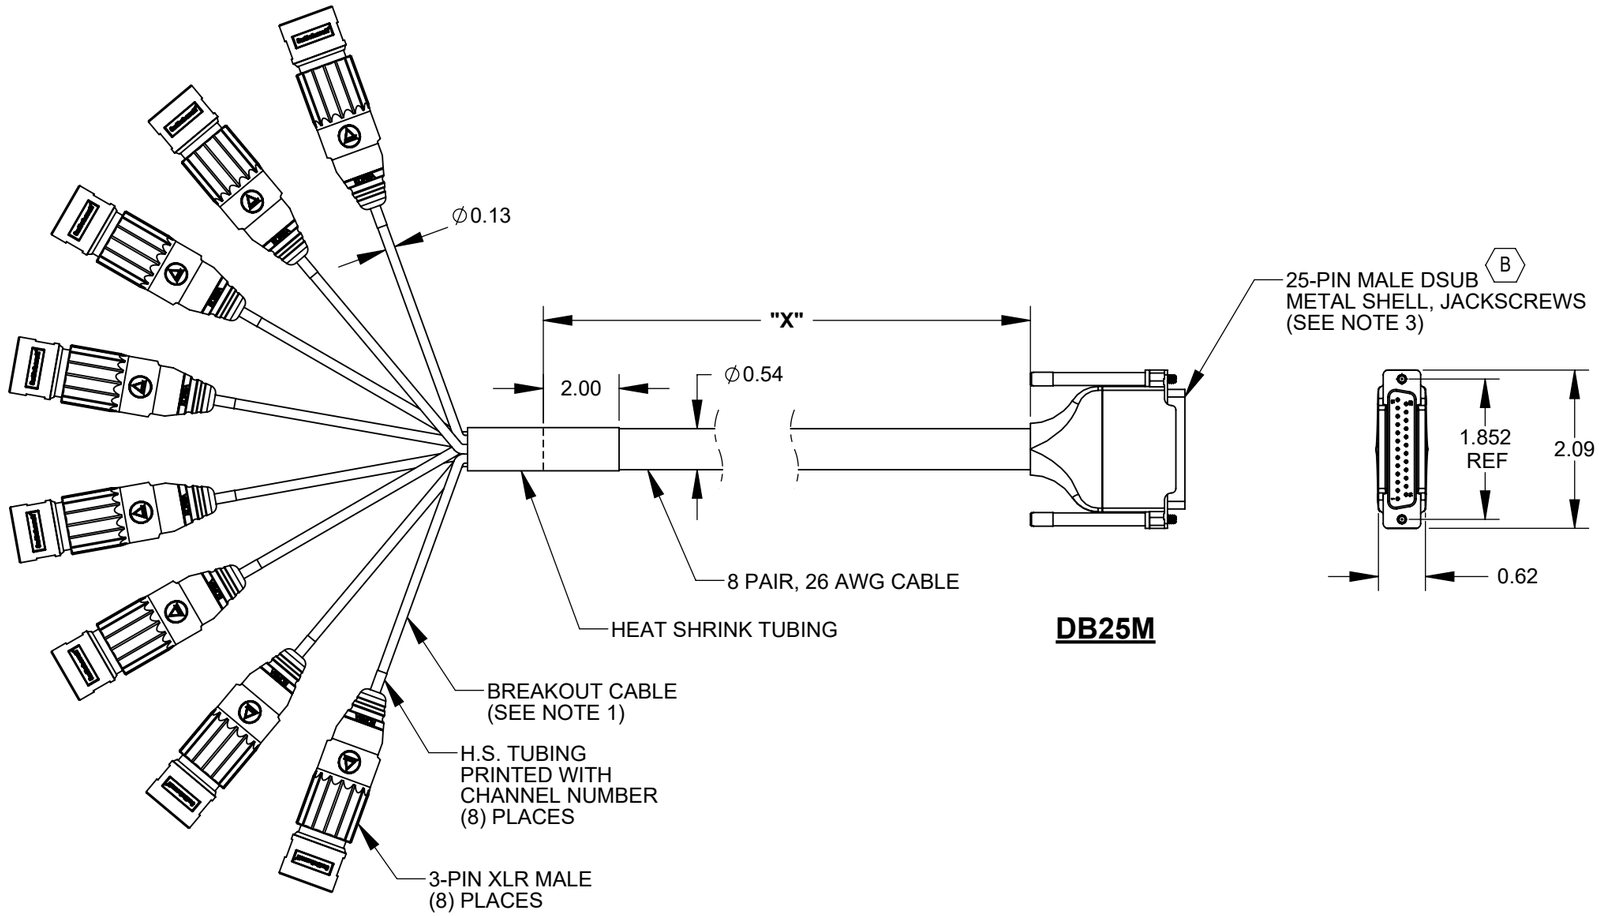

DB25M

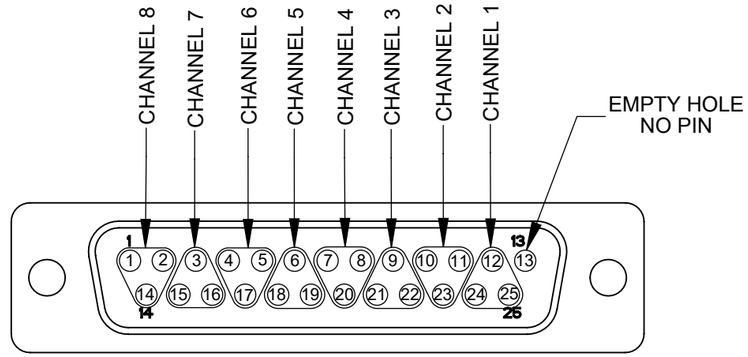

DB25 PIN-OUT VIEW FOR DB25

DB25 AND XLRM WIRING CHART				
XLR (CHANNEL)	**CABLE** (COLOR)	**PIN 2** (RED)	**PIN 3** (BLACK)	**PIN 1** (BARE)
1	BROWN	24	12	25
2	RED	10	23	11
3	ORANGE	21	9	22
4	YELLOW	7	20	8
5	GREEN	18	6	19
6	BLUE	4	17	5
7	PURPLE	15	3	16
8	GRAY	1	14	2

PART NO.	CABLE LENGTH "**X**"
DB25M02XLRM	2.00 FT +/- 1.50 IN
DB25M03XLRM	3.00 FT +/- 1.50 IN
DB25M10XLRM	10.00 FT +/- 1.50 IN
D DB25M25XLRM	25.00 FT +/- 3.00 IN

NOTES:

1. BREAKOUT CABLE LENGTH: 18.00 +/- 0.75 INCHES. SEE TABLE FOR COLOR.
2. (B) THIS PRODUCT COMES COILED AND PACKAGED IN BAG.
3. (B) JACKSCREWS ARE SHIPPED UNASSEMBLED. CABLE COMES WITH BOTH #4-40 THREAD (2) AND #M3 THREAD (2) JACKSCREWS.
4. (B) MATERIALS:
   XLR MALE CONNECTOR:
   HANDLE - ZINC ALLOY, NICKEL PLATED
   HOUSING - ZINC ALLOY, NICKEL PLATED
   INSULATOR - THERMOPLASTIC, GREEN
   CONTACT PINS - COPPER ALLOY, SILVER PLATED
   H.S. TUBING - THERMOPLASTIC
   DSUB - COPPER ALLOY, NICKEL PLATED WITH GOLD PINS
   JACKSCREWS - STAINLESS STEEL
5. THIS PRODUCT IS RoHS COMPLIANT.

REV	ECO NUMBER	DATE	BY	APVD
D	26891	11/29/11	TJK	TJK
C	26795	7-8-11	TO	TJK
B	26637	10/11/10	RS	TJK
A	25716	10/03/07	JGK	TJK

REVISIONS

UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS IN INCHES
   - TWO PLACE DECIMALS ±0.02
   - THREE PLACE DECIMALS ±0.005

DO NOT SCALE DRAWING

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.

SIZE	WIDTH	MULT	LBS/M	TEMPER

FINISH
SPEC No.

MATERIAL
SPEC No.

FIRST USED ON

SCALE 2:1

DATE DRAWN	BY	CHKD	APVD
9/12/06	JGK	RS 11/29/10	TJK 11/29/10

Switchcraft®

SHEET 1 OF 1

NAME
DB25M TO 8 XLR MALES, RoHS

PART No.
DB25M_ _XLRM

REV
D

CUSTOMER DRAWING

SolidWorks CAD File (B)