Ordering number:EN2797A

DBF40

Silicon Diffused Junction Type

4.0A Single-Phase Bridge Rectifier

Features


- Glass passivation for high reliability.
- Plastic molded structure.
- Peak reverse voltage:V_{RM}=200, 600V.
- Average rectified current:I_O=4.0A.

Package Dimensions

unit:mm

1203

[DBF40]

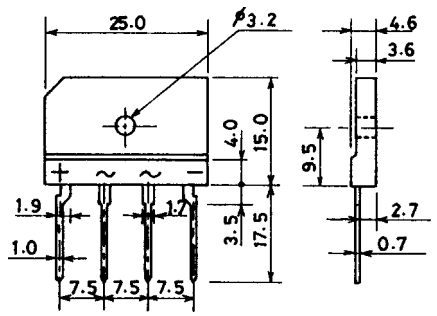

Specifications


Absolute Maximum Ratings at Ta = 25˚C

Parameter	Symbol	Conditions	~~DBF40C~~	DBF40G	Unit
Peak Reverse Voltage	V_{RM}		200	600	V
Average Rectified Current	I_O	Tc=108˚C, with 80×80×1.5mm³ Al fin	→	4.0	A
		Ta=25˚C, without fin	→	2.3	A
Surge Forward Current	I_{FSM}	50Hz sine wave, 1 cycle	→	80	A
Junction Temperature	Tj		→	150	˚C
Storage Temperature	Tstg		→	–40 to +150	˚C


Electrical Characteristics at Ta = 25˚C, per constituent element of bridge.


Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Forward Voltage	V_F	I_F=2.0A			1.05	V
Reverse Current	I_R	V_R:At each V_{RM}			10	μA
Thermal Resistance (Junction-Ambient)	Rth(j-a)	Without fin			30	˚C/W
Thermal Resistance (Junction-Case)	Rth(j-c)	With Al fin			5.5	˚C/W


Electrical Connection





SANYO Electric Co.,Ltd. Semiconductor Bussiness Headquarters
TOKYO OFFICE, Tokyo Bldg., 1-10 , Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

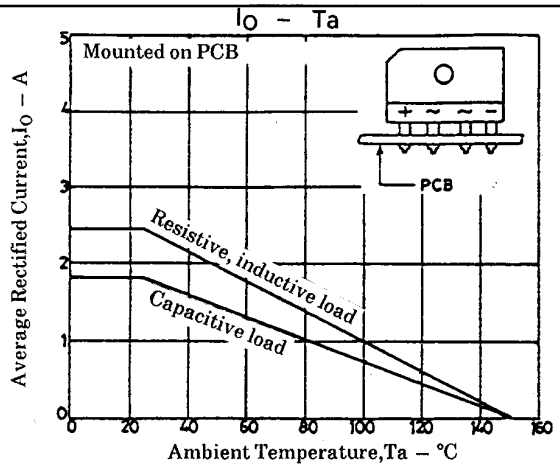

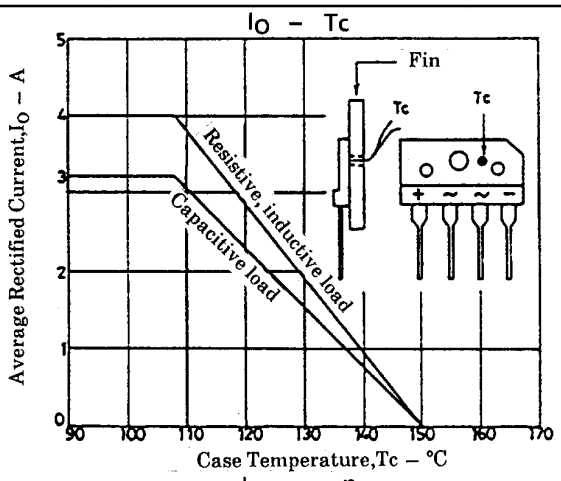

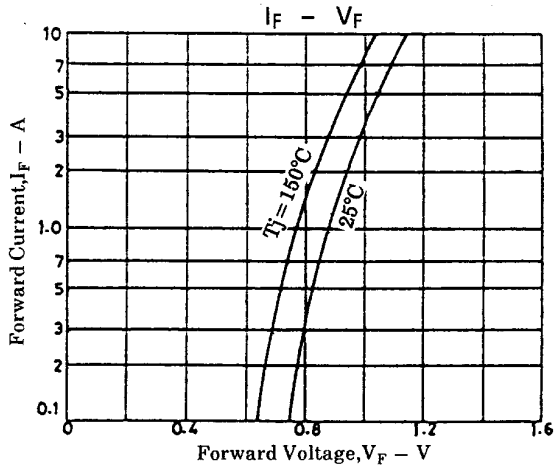

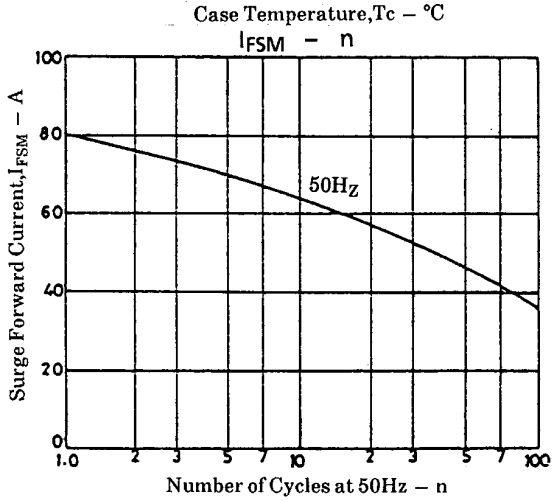

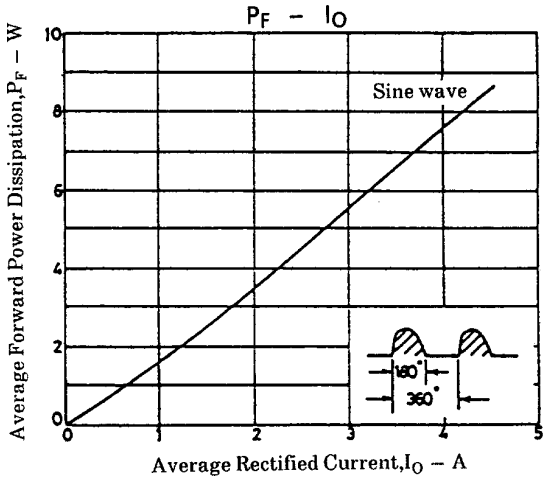

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:
① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
② Not impose any responsibilty for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of May, 1998. Specifications and information herein are subject to change without notice.