



SIGN	DATE	DESCRIPTION	APPROVER
⚠1	07/09'13	update the drawing	Guoxue
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

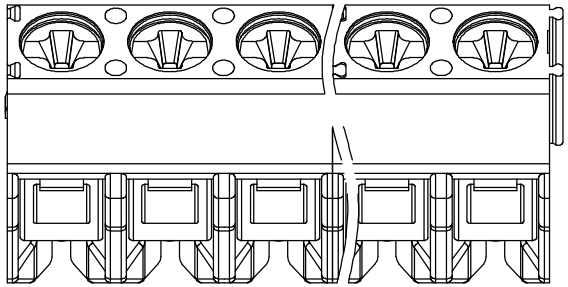

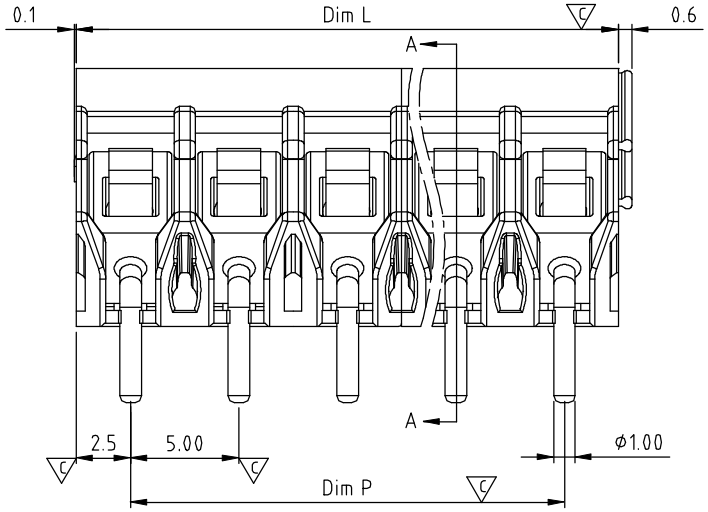

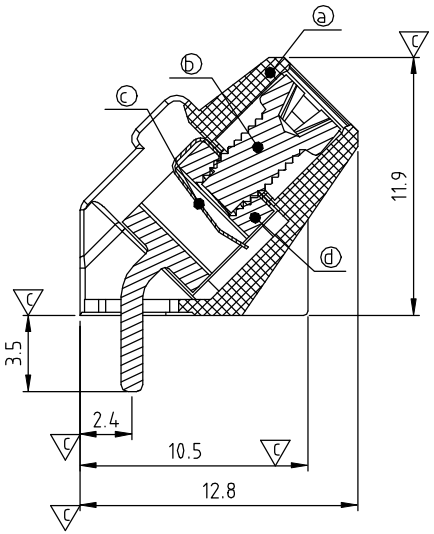

SECTION A-A

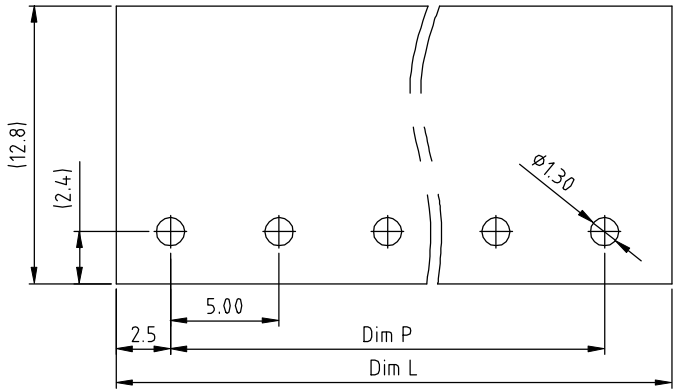

PCB Layout
TOP VIEW

N = Number of poles
Dim L=Nx5.0
Dim P=(N-1)x5.0

Poles \ Dim.	Dim L	Dim P
2-6p	±0.15	±0.15
7-12p	±0.25	±0.25
13-18p	±0.35	±0.35
19-24p	±0.40	±0.40

Materials
Item a Terminal housing: PA66 (UL94V-0)
Item b Terminal screw: Steel Zinc plating "+/-" slot type
Item c Wire guard :Stainless steel
Item d Terminal body :Brass(CuZn) ,Tin Plated

Electrical cULus
- Voltage rating: 300VAC
- Current rating: 15A
- Wire range:
- Solid wire(AWG): 12-26
- Stranded wire(AWG): 12-26
- ⚠1 Torque(Lb-In): 2.4
- Screw: M2.6
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- ⚠1 Soldering temperature: 260°C±5°C/5 Sec
- ⚠1 Safety Approval: c UL us
- Critical dimension: ▽C

⚠ KZ xx 7 0 x 0 xxxx G

End stackable
02 2 POLES
03 3 POLES
... ...
24 24 POLES

COLOR
0 Black
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)
9 White
C Green(RAL 6018/U)

0000: "@" Logo (Standard)
000A: "ANYTEK" Mark

Any special item by customer requst. please contact sales department.

RoHS compliant (lead<4%) In copper Alloy

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	KZ 5.0 Series ("+/-"Screw&Square hole)				
PART NO.	KZxx70x0xxxxG			DWG NO.	8KZ0101
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Guoxue 2013.07.09	Guoxue 2013.07.09	UNIT: mm / SCALE: NONE / SHEET: 01/01 / REV.: C	

Tolerance	
X.	±0.5
X.X	±0.3
X.XX	±0.1
X°	±1°