
Data Sheet | Item Number: 210-113

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

https://www.wago.com/210-113



Color: silver-colored

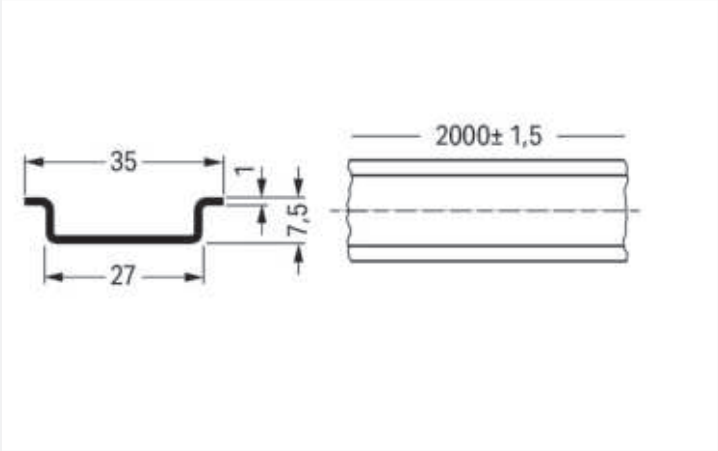

Dimensions in mm

Physical data	
Width	2000 mm / 78.74 inches
Height	7.5 mm / 0.295 inches
Depth	35 mm / 1.378 inches

Material data	
Color	silver-colored
Weight	690 g

Commercial data	
Product Group	2 (Terminal Block Accessories)
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	IT
GTIN	4017332272308
Customs tariff number	72169180000

Product Classification	
UNSPSC	30101804
eCl@ss 10.0	27-40-06-02
eCl@ss 9.0	27-40-06-02
ETIM 9.0	EC001285
ETIM 10.0	EC001285
ECCN	NO US CLASSIFICATION

Continued on next page

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 210-113

Documentation

Bid Text

210-113	31.08.2017	doc 23.50 KB
210-113	19.02.2019	xml 2.64 KB

CAD/CAE-Data

CAD data

2D/3D Models 210-113

CAE data

EPLAN Data Portal 210-113

WSCAD Universe 210-113

ZUKEN Portal 210-113

1 Compatible Products

1.1 Optional Accessories

1.1.1 Installation

1.1.1.1 Mounting accessories



Item No.: 209-109
Edge guards; for DIN 35 rail (7.5 mm high); gray

Item No.: 209-137
Mounting adapter; can be used as end stop; 6.5 mm wide; gray



Item No.: 249-117
Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



Item No.: 249-197
Screwless end stop; 14 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



Item No.: 249-116
Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

Continued on next page

1.1.2 Marking

1.1.2.1 Label




Item No.: 210-808
Labels; for Smart Printer; 9.5 x 25 mm; white



Item No.: 210-708
Labels; for TP printers; 9.5 x 25 mm; white

Installation Notes



When using standard DIN-rails as ground conductor busbars, please refer to the maximum current capacities listed above.
Steel DIN-rails are not suited for PEN (ground and N-conductor) applications per EN 60947-7-2 (VDE 0611, Part 3).