
Data Sheet | Item Number: 210-118

Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

https://www.wago.com/210-118



Color: silver-colored

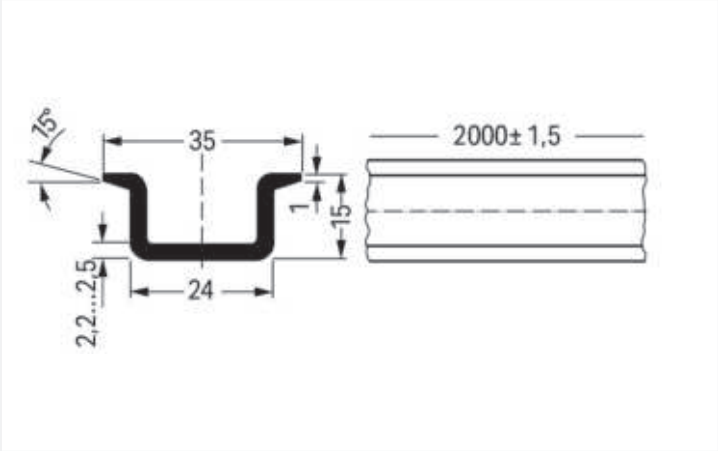

Dimensions in mm

Physical data	
Width	2000 mm / 78.74 inches
Height	15 mm / 0.591 inches
Depth	35 mm / 1.378 inches

Material data	
Color	silver-colored
Weight	1820 g

Commercial data	
Product Group	2 (Terminal Block Accessories)
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	IT
GTIN	4017332277181
Customs tariff number	72169180000

Product Classification	
UNSPSC	30101804
eCl@ss 10.0	27-40-06-02
eCl@ss 9.0	27-40-06-02
ETIM 9.0	EC001285
ETIM 10.0	EC001285
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 210-118

Documentation

Bid Text

210-118	31.08.2017	doc 23.50 KB	
210-118	19.02.2019	xml 2.64 KB	

CAD/CAE-Data

CAD data

2D/3D Models 210-118

CAE data

EPLAN Data Portal 210-118

WSCAD Universe 210-118

ZUKEN Portal 210-118

1 Compatible Products

1.1 Optional Accessories

1.1.1 Installation

1.1.1.1 Mounting accessories

Item No.: 209-137
Mounting adapter; can be used as end stop; 6.5 mm wide; gray



Item No.: 249-117
Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



Item No.: 249-197
Screwless end stop; 14 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



Item No.: 249-116
Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

Continued on next page

1.1.2 Marking

1.1.2.1 Label




Item No.: 210-808
Labels; for Smart Printer; 9.5 x 25 mm; white



Item No.: 210-708
Labels; for TP printers; 9.5 x 25 mm; white

Installation Notes



When using standard DIN-rails as ground conductor busbars, please refer to the maximum current capacities listed above.
Steel DIN-rails are not suited for PEN (ground and N-conductor) applications per EN 60947-7-2 (VDE 0611, Part 3).