Fuse Holder for Class CC and 10 x 38 mm (13⁄32" x 1 ½") fuses

2.5 – 16 mm²	AWG 14 – 6 600 V, 30 A 600 V, 30 A	2.5 – 16 mm² 690 V AC, 32 A 1000 V DC, 32 A	AWG 14 – 6 1000 V DC, 30 A 750 V AC, 30 A 600 V AC, 30 A	2.5 – 16 mm² 1000 V DC, 32 A	AWG 14 – 6 1000 V DC, 30 A
Fuse holder width 17.5 mm 10 - 12 mm		Fuse holder width 17.5 mm 10 - 12 mm		Fuse holder width 17.5 mm 10 - 12 mm	








	Item No.	Pack Unit
Fuse holder for Class CC fuses, lt gray		
1-pole	**811-410**	12
2-pole	**811-420**	6
3-pole	**811-430**	4
Fuse holder for Class CC fuses with blown fuse indication*, lt gray		
1-pole	**811-411**	12
2-pole	**811-421**	6
3-pole	**811-431**	4
Fuse holder for Class CC fuses with 24 V DC blown fuse indication, lt gray		
1-pole	**811-414**	12

	Item No.	Pack Unit
Fuse holder for 10 x 38 mm fuses, lt gray		
1-pole	**811-310**	12
2-pole	**811-320**	6
3-pole	**811-330**	4
Fuse holder for 10 x 38 mm fuses with blown fuse indication*, lt gray		
1-pole	**811-311**	12
2-pole	**811-321**	6
3-pole	**811-331**	4
Fuse holder for 10 x 38 mm fuses with 24 V DC blown fuse indication, lt gray		
1-pole	**811-314**	12

	Item No.	Pack Unit
Fuse holder for 10 x 38 mm PV fuse, lt gray		
1-pole	**811-316**	12
Fuse holder for 10 x 38 mm PV fuse with 1000 V blown fuse indication, lt gray		
1-pole	**811-317**	12

*Standard blown fuse indication from 90 - 600 V AC, 115 - 600 V DC

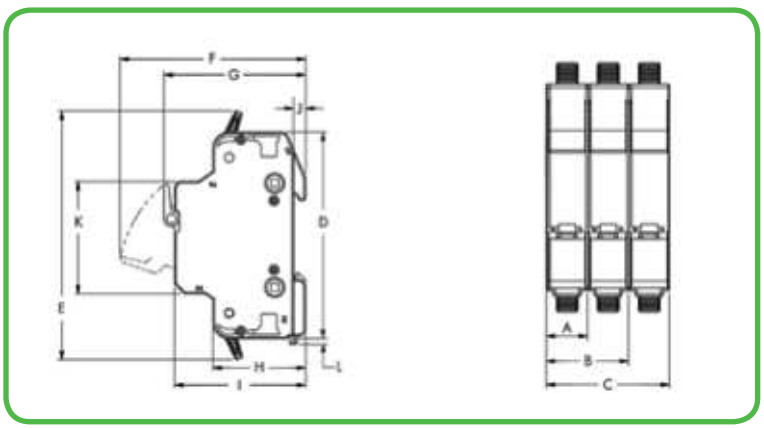

Dimension	mm (in.)	Dimension	mm (in.)
A	17.3 (0.68)	G	59.7 (2.35)
B	34.6 (1.36)	H	39.0 (1.54)
C	51.9 (2.04)	I	55.2 (2.17)
D	87.0 (3.43)	J	5.0 (0.20)
E	104.9 (4.13)	K	47.4 (1.87)
F	78.3 (3.08)	L	2.5 (0.10)

Downloaded from Arrow.com.

Fuse Holder for Class CC and 10 x 38 mm (13⁄32" x 1 ½") fuses



Conductor for Entry
CAGE CLAMP® using lever actuation



Coupling Kit
used to create a 2- or 3-pole fuse holder



Coupling Kit
allows multi-pole configuration



Ferruled Conductor
up to 8 AWG, or twin ferrule up to 10 AWG



285-442 Marking Adapter
allows the continuous marking strip to be used



Fuse Location



WMB Marking Location
for convenient identification



Mounting Clip
for easy removal from DIN rail

Accessories for 811 Series

	Item No.	Color	Pack Unit
Continuous Marking Strip Adapter			
	uses 2009-110 marker strip		
	285-442	gray	25
Coupling Kit for 12-poles			
	811-612		1
Test Plug, 2mm diameter			
	with 500mm/17.7" cable		
	210-136	red	50
Continuous Marking Strip, plain			
	11mm wide		
	2009-110	white	50m roll
WMB Multi Marking System, plain*			
	10 row w/10 markers per row		
	793-5501	white	5
Twin Ferrules, Insulated, L2=12mm			
	sleeve for 2 x 10 AWG		
	51018068	yellow	100
	sleeve for 2 x 12 AWG		
	51018069	gray	100
	sleeve for 2 x 14 AWG		
	51018070	blue	100
Variocrimp, Crimping Tool			
	for wires 24-12 AWG		
	206-204		1
	for wires 10-6 AWG		
	206-216		1
Screwless End Stop for DIN 35 Rail			
	6mm/0.236" wide		
	249-116	gray	100 (4x25)
	10mm/0.394" wide		
	249-117	gray	50 (2x25)

*Pre-numbered WMB markers available

Downloaded from Arrow.com.