
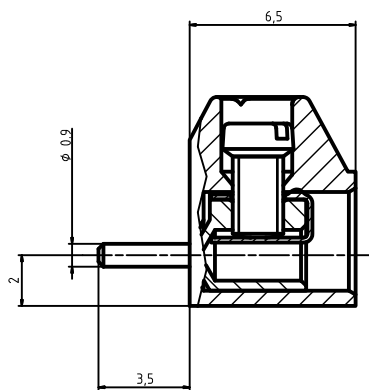


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

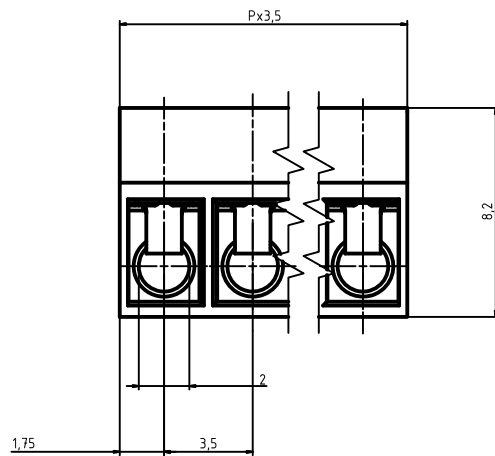

Ratings

Use Group B
Rated Voltage 300V
Rated Current 6A
Rated Wire Size
solid AWG 28-16
flexible AWG 28-16

Screw Size M2

Insulating Material

Material PA 6.6
Flammability Class UL 94 V-0

Materials

Clamp Brass
Screw Stainless Steel
Solder Tag Steel
Temperature Range -40° C ~ 105° C
RoHS Compliant

Part No.: ED550/XDS

No. of Poles
02 2 Poles
03 3 Poles
...
16 16 Poles

△			
SIGN	DESCRIPTION	CHK.	DATE

DWG	WF. Zhang	DATE	2017.09.11	UNITS:	MM	SHEET:	1 OF 1	Tolerance
CHK.	WF. Zhang	DATE	2017.09.11	SCALE:	NONE 5:1 (:)	REV.: A		X. ±0.50
APP.		DATE		TITLE:	ED550DS series 3.5 mm, one piece wire protector, vertical wire entry			X.X ±0.30
				PART NO.	ED550/XDS			X° ±1°
				DWG NO.	ED550/XDS.DWG			⊙



ON-SHORE TECHNOLOGY, INC.