**Ratings:**


| | |
|---|---|
| Current | 15A |
| Voltage | 300 VB |
| Test Voltage | 2.0 kV |


**Dimensions:**

| | |
|---|---|
| Spacing | 5.0mm (5.08mm) |
| PCB Hole Diameter | 1.4mm |

**Materials:**

| | |
|---|---|
| Insulating Material | PA |
| Flammability | UL94V-0 |
| Temperature | -30°C/+105°C |
| Contact Pin | Cu |
| Color | Green |

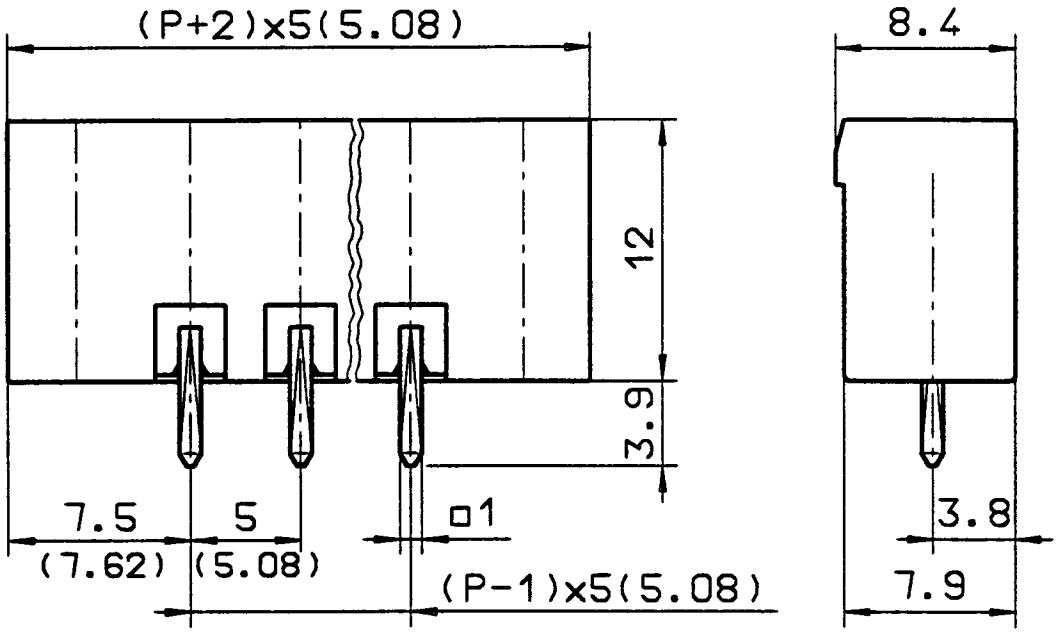
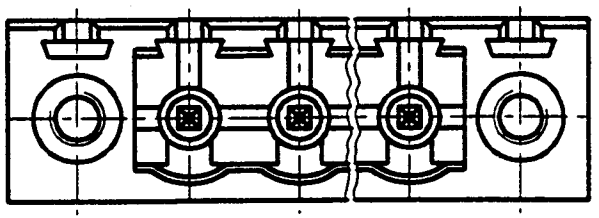
| | | | | | | |
|---|---|---|---|---|---|---|
| ON-SHORE TECHNOLOGY, INC. | Part Number<br>EDSTL(Z)956/ * *<br>* - NUMBER OF POSITIONS | Units<br>mm | Drawing | Reviewed | Approved | Date<br>1/23/98<br>Sheet 1 of 1<br>Rev. A |