
Transfer or duplication of this doucument as well as the utilisation or communication of its content are not permitted unless express consen is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

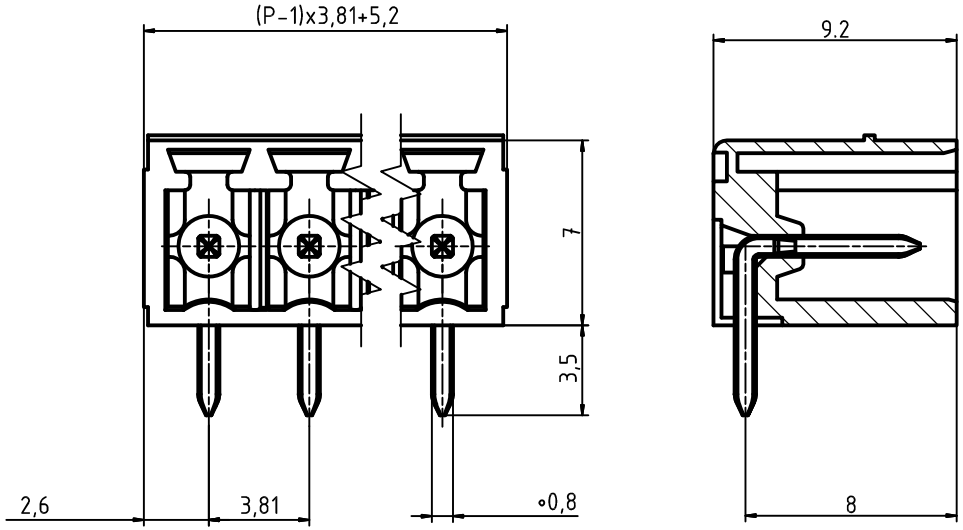

Ratings

	B	D
Use Group		
Rated Voltage	300V	300V
Rated Current	10A	10A

Insulating Material

Material	PA 6.6
Flammability Class	UL 94 V-0

Materials

Contact Pin	Copper Alloy
Temperature Range	-40° C ~ 105° C

RoHS Compliant

Part No.: EDSTLZ1550/X

No. of Poles
02 2 Poles
03 3 Poles
... ...
20 20 Poles

SIGN	DESCRIPTION	CHK.	DATE
1			

DWG.	WF. Zhang	DATE	2017.09.11	UNITS:	MM	SHEET:	1 OF 1
CHK.	WF. Zhang	DATE	2017.09.11	SCALE:	NONE 5:1 (:)	REV.: A	
APP.		DATE		TITLE:	EDSTLZ1550 series 3.81 mm header		
ON-SHORE TECHNOLOGY, INC.				PART NO.	EDSTLZ1550/X		
				DWG NO.	EDSTLZ1550/X.DWG		

Tolerance	
X.	±0.50
X.X	±0.30
X.XX	±0.10
X°	±1°