Ratings:

Current	8A
Voltage	300 V
Wire Size	28-16AWG
Test Voltage / Dirt Level	4.0 kV/3
Rated Torque / Screw Size	0.4Nm /M2

Rated Cross Section:


Single Wire (solid)	1.5mm^2
Stranded Wire (flexible)	1.0mm^2
Stranded Wire with Ferrules	1.0mm^2


Dimensions:

Spacing	3.81mm
Stripped Length	7.0mm

Materials:

Insulating Material	PA
Flammability	UL94V-0
Temperature	-30°C/+105°C
Block	CuZn
Contact	CuSn
Color	Green

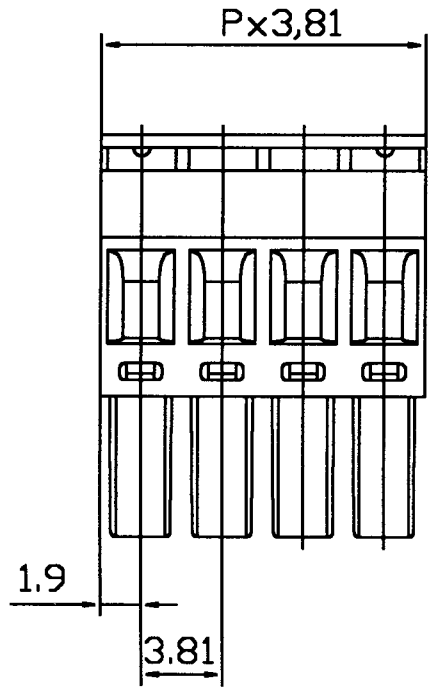

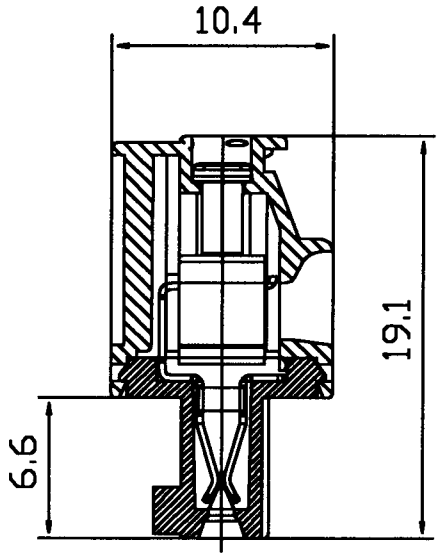

ON - SHORE TECHNOLOGY, INC.

Part Number
EDZ1710/ * *
* - NUMBER OF POSITIONS

Units	Drawing	Reviewed	Approved	Date
mm				2/15/99

Sheet 1 of 1

Rev. A