SERIES EG1390 SWITCHES

SLIDE SWITCHES



MECHANICAL SPECIFICATIONS

Mechanical Life:	10,000 cycles
Force:	200 +/- 150 gf in both directions
Travel:	1.5 +/- 0.1mm each position

ELECTRICAL SPECIFICATIONS

Electrical Life:	10,000 cycles
Contact Rating:	300mA @ 4VDC
Contact Resistance:	70mΩ (initial max)
Insulation Resistance:	100MΩ (Min @ 100VDC)
Dielectric Strength:	100VAC

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature:	-10ºC to +60ºC
Storage Temperature:	-20ºC to +70ºC

FEATURES & BENEFITS


Tape & Reel Packaging
2-position
Surface Mount
Sub-miniature

APPLICATIONS / MARKETS


Computer Servers/peripherals
Consumer electronics
Instrumentation
Test & measurement

HOW TO ORDER:


SERIES	MODEL	ACTUATOR
EG	1390	A = 1.0mm B = 2.0mm





SCHEMATIC

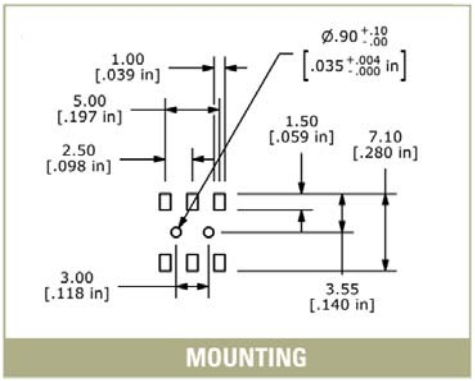

MOUNTING

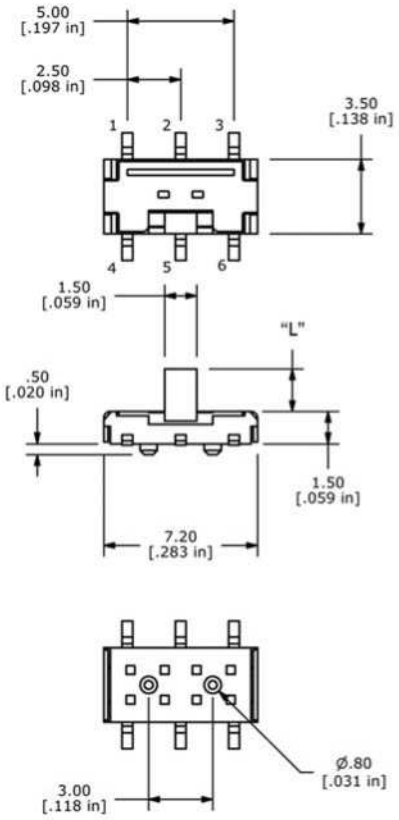



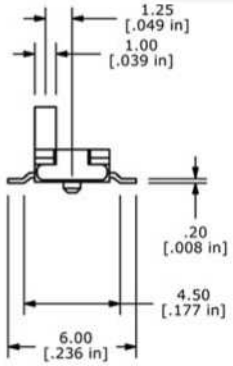

Model	"L" Dimension
1390 A	1.00 mm
1390 B	2.00 mm

www.e-switch.com
email: info@e-switch.com

7153 NORTHLAND DRIVE NORTH
MINNEAPOLIS, MN 55428

PHONE: 800-867-2717
FAX: 763-531-8235