

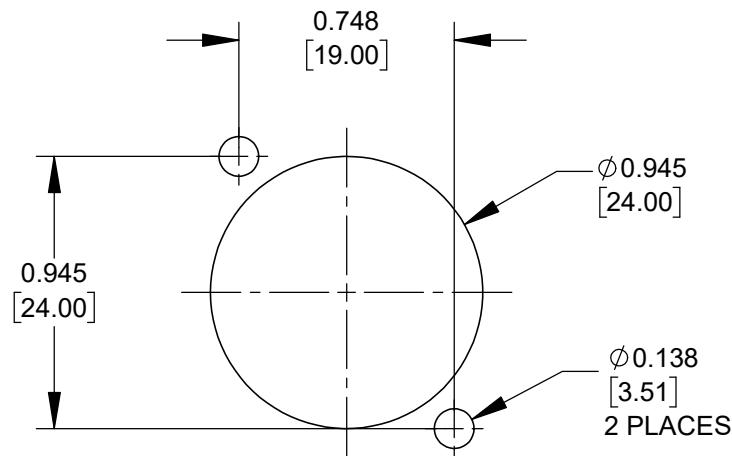
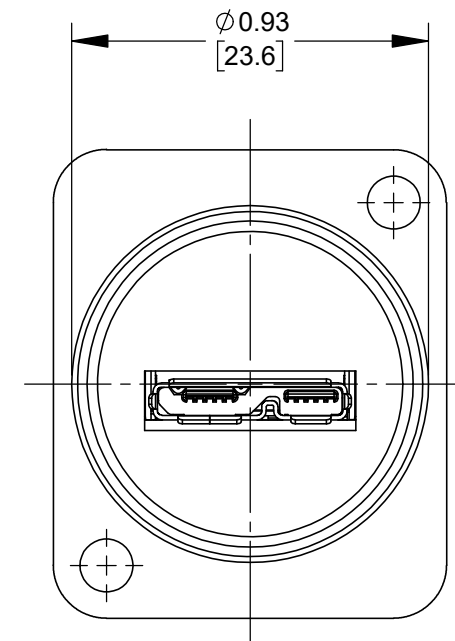
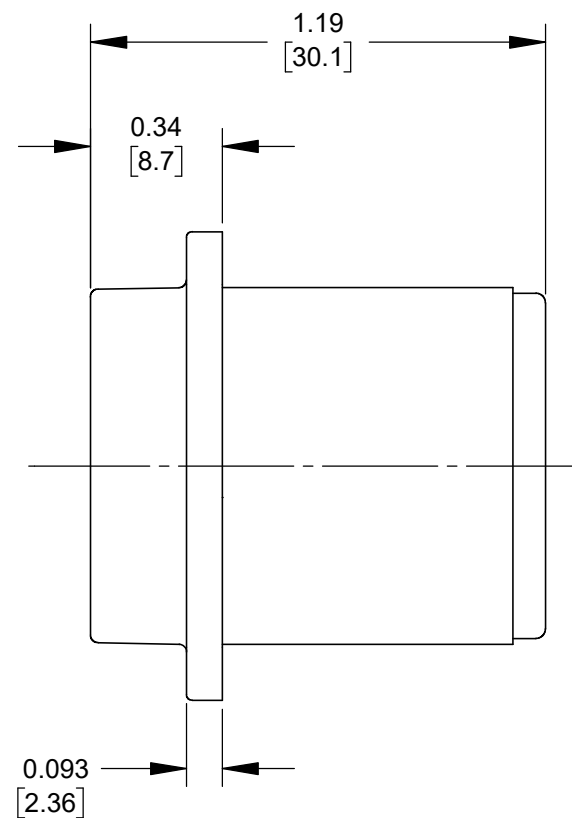
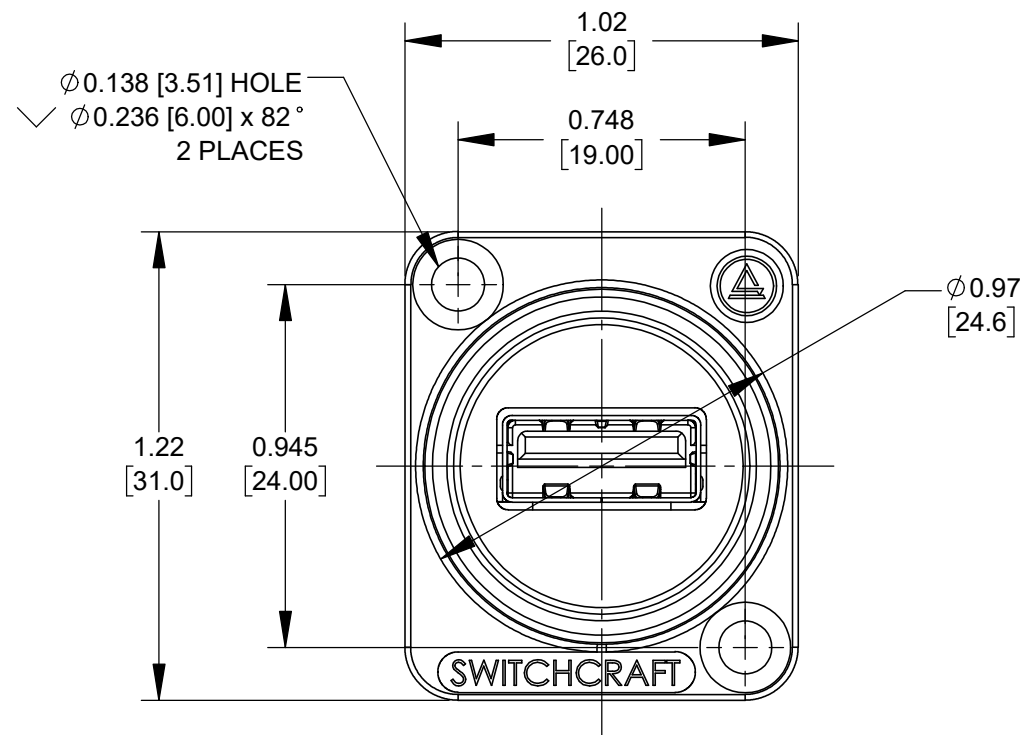


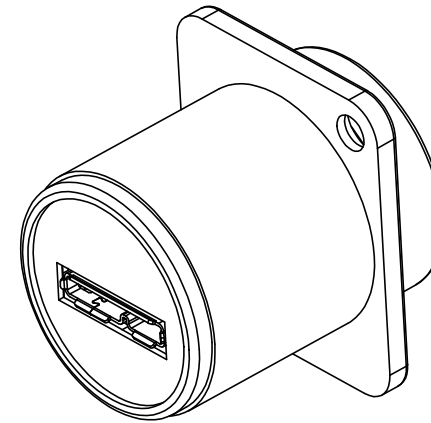

RECOMMENDED
PANEL CUT-OUT

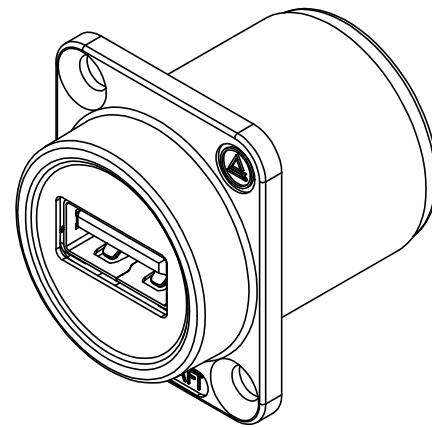

NOTES:

1. SPECIFICATIONS:

FRONT CONNECTOR:

- TYPE: USB 3.0A
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE: 7.8 lb
 - WITHDRAWAL FORCE 1.8 lb
- CONTACT PLATING: GOLD

BACK CONNECTOR:

- TYPE: MICRO USB 3.0 AB
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE: 7.8 lb
 - WITHDRAWAL FORCE 1.76 lb
- CONTACT PLATING: GOLD

OVERALL:

- MECHANICAL:
 - VIBRATION: MIL-STD 202G METHOD 201A
- ENVIRONMENTAL:
 - THERMAL SHOCK: MIL-STD-202G METHOD 107G CONDITION A
 - OPERATING TEMP: 0 TO 65 °C
- HOUSING MATERIAL: THERMOPLASTIC, BLACK.

2. THIS PRODUCT IS RoHS COMPLIANT.

CUSTOMER DRAWING

					UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES [mm] - TWO PLACE DECIMALS ±0.02 [0.5] - THREE PLACE DECIMALS ±0.005 [0.13]	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.																		
						SIZE	WIDTH		MULT		LBS/M		TEMPER											
						FINISH						MATERIAL												
						SPEC No.						SPEC No.												
						FIRST USED ON				SCALE 2:1		Switchcraft®												
						DATE DRAWN	BY	CHKD		APVD														
A	28785	01/28/26	PC	TJK		4/11/16	NS	NS		SRC														
								4/11/16		4/11/16		SHEET 1 OF 1												
REV	ECO NUMBER	DATE	BY	APVD		NAME										PART No.				REV				
REVISIONS						DO NOT SCALE DRAWING					EH SERIES CONNECTOR, RoHS USB 3.0 TYPE A TO MICRO USB 3.0 TYPE AB										EHUSB3ACAB			