


Copyright FCI.

FCIconnect.com


PRODUCT NUMBER	PITCH
ELxx11x200J0G	3.50 mm

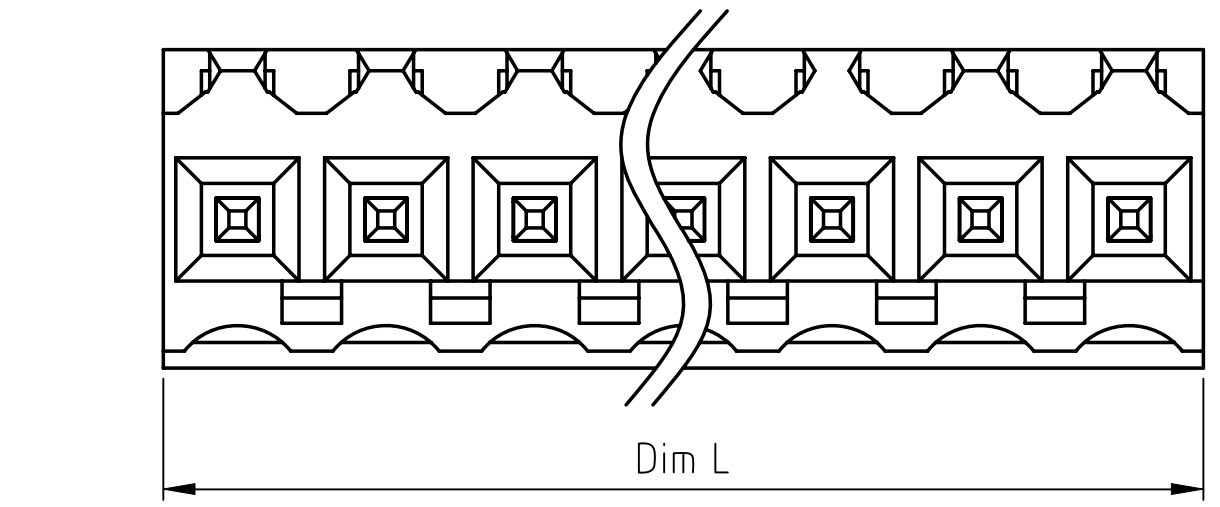

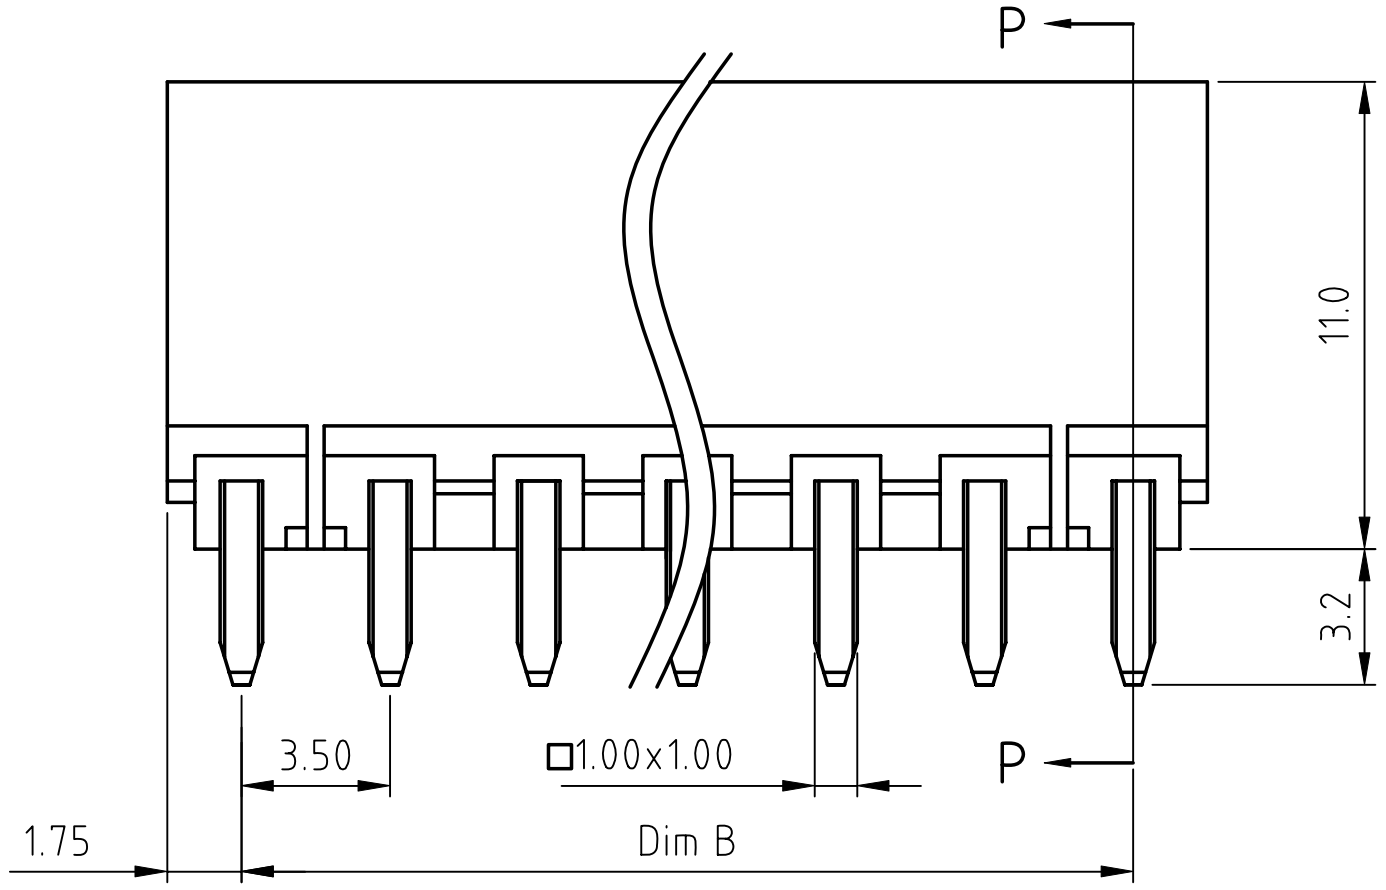

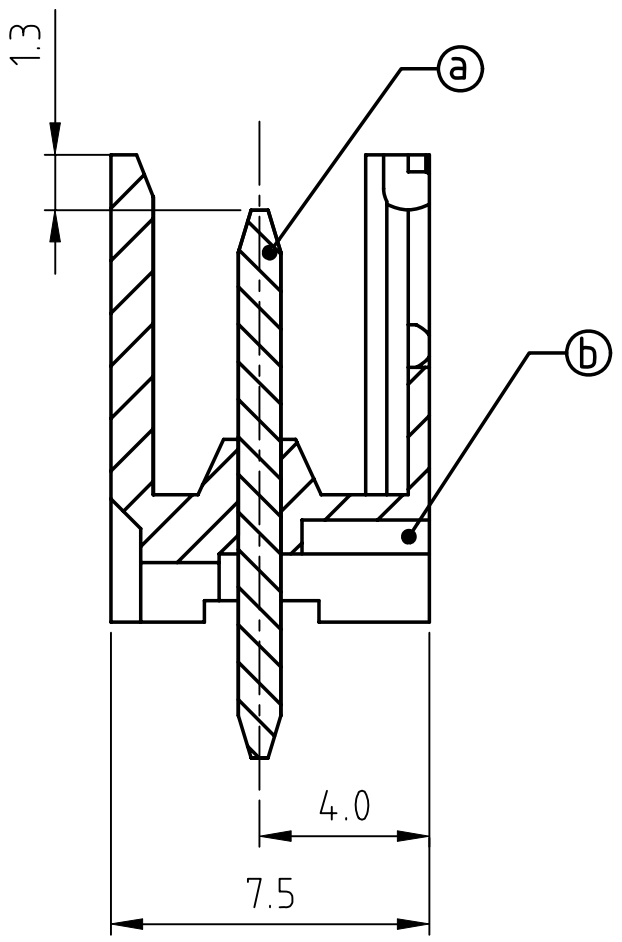

SECTION P-P

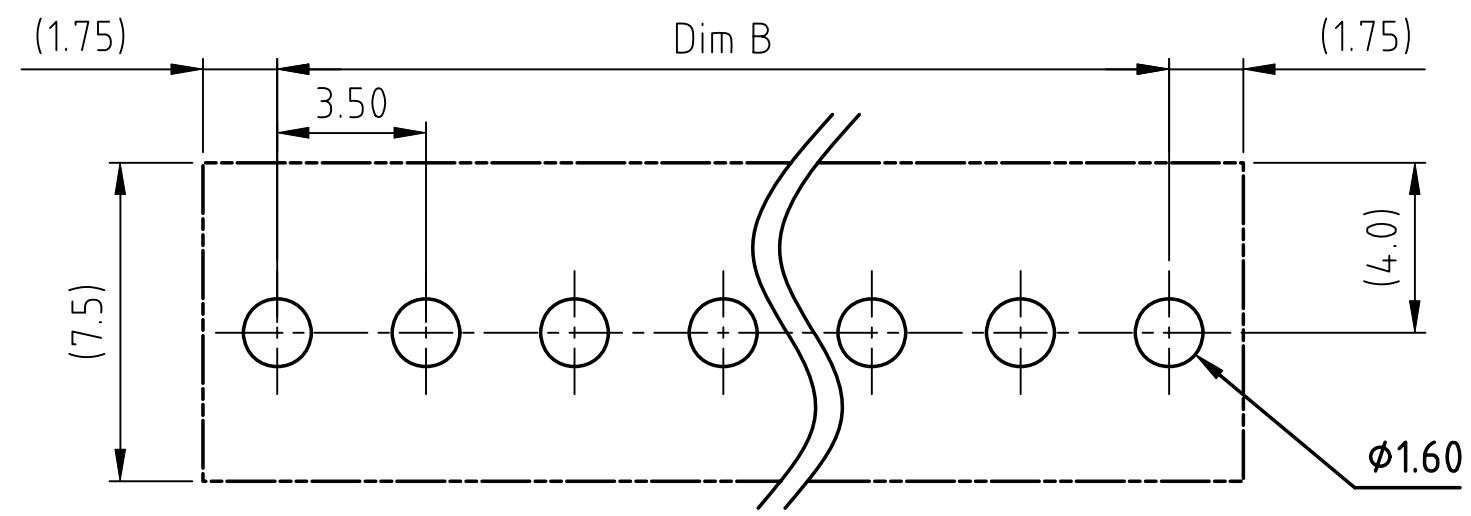

RECOMMENDED P.C.B LAYOUT
TOP VIEW

Material:
- Item ⓐ Male contact pin: Copper,Tin plated.
- Item ⓑ Terminal (housing): Thermoplastic(UL94V-0)

Electrical cULus
- Voltage rating: 300V
- Current rating: 10A
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5Sec
- Safety Approval: cULus

DIMENSION

Dim L	N×3.50
Dim B	(N-1)×3.50

N= Number of poles

Poles	Tolerance
2p-6p	±0.15
7p-12p	±0.20
13p-18p	±0.25
19p-24p	±0.30

PART NO.: EL xx 11 x 2 00J0 G

Solid block
No. of poles
02 2 poles
03 3 poles
... ...
24 24 poles

Color
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)
9 White(RAL1102)
C Green(RAL6018/U)

RoHS compliant
(lead<4%)
In copper Alloy

mat'l. code	surface ASME Y14.5	tolerance ASME Y14.5	projection
ltr / ecn no / dr / date	tolerances unless otherwise specified		MM
	angles X°±1°	linear X.±0.5 / X.X±0.3 / X.XX±0.1	scale
	dr	EVIN ZHONG	042214
	engr	EVIN ZHONG	042214
	chr	HANKE FENG	042214
	appd	SHI JUN	042214
sheet revision	A		
index sheet	1		

product family: TERMINAL BLOCK

title: TERMINAL BLOCK
PLUGGABLE SOCKET,OPEN VERTICAL,DIP TYPE

dwg no: ELxx11x200J0G — sheet 1 of 1 — size A4

type: CUSTOMER Drawing