EPC2107 – Enhancement-Mode GaN Power Transistor Half-Bridge with Integrated Synchronous Bootstrap

V_{DS}, 100 V

$R_{DS(on)}$, 390 mΩ

I_D, 1.7 A


RoHS Halogen-Free

Revised May 19, 2020

Gallium Nitride's exceptionally high electron mobility and low temperature coefficient allows very low $R_{DS(on)}$, while its lateral device structure and majority carrier diode provide exceptionally low Q_G and zero Q_{RR}. The end result is a device that can handle tasks where very high switching frequency, and low on-time are beneficial as well as those where on-state losses dominate.

Questions: Ask a GaN Expert

EPC2107 – Detailed Schematic

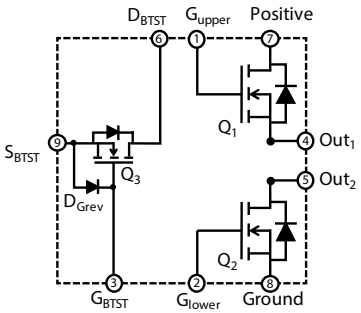



Die size: 1.35 x 1.35 mm

EPC2107 eGaN® ICs are supplied only in passivated die form with solder bumps.

Applications

- High frequency DC-DC conversion
- Class-D audio
- Wireless power (highly resonant and inductive)

Benefits

- Ultra high efficiency
- Ultra low $R_{DS(on)}$
- Ultra low Q_G
- Ultra small footprint

Maximum Ratings				
DEVICE	**PARAMETER**		**VALUE**	**UNIT**
Q1 & Q2	V_{DS}	Drain-to-Source Voltage (Continuous)	100	V
		Drain-to-Source Voltage (up to 10,000 5 ms pulses at 150°C)	120	
	I_D	Continuous (T_A = 25°C, $R_{\theta JA}$ = 60°C/W)	1.7	A
		Pulsed (25°C, T_{PULSE} = 300 µs)	3.8	
	V_{GS}	Gate-to-Source Voltage	6	V
		Gate-to-Source Voltage	–4	
	T_J	Operating Temperature	–40 to 150	°C
	T_{STG}	Storage Temperature	–40 to 150	
Q3	V_{DS}	Drain-to-Source Voltage (Continuous)	100	V
		Drain-to-Source Voltage (up to 10,000 5 ms pulses at 150°C)	120	
	I_D	Continuous (T_A = 25°C, $R_{\theta JA}$= 100°C/W)	0.5	A
		Pulsed (25°C, T_{PULSE} = 300 µs)	0.5	
	V_{GS}	Gate-to-Source Voltage	6	V
		Operating Temperature	–40 to 150	
	T_J	Storage Temperature	–40 to 150	°C
	T_{STG}	Storage Temperature	–40 to 150	

Thermal Characteristics			
PARAMETER		**TYP**	**UNIT**
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	6	°C/W
$R_{\theta JB}$	Thermal Resistance, Junction-to-Board	33	
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient (Note 1)	81	

Note 1: $R_{\theta JA}$ is determined with the device mounted on one square inch of copper pad, single layer 2 oz copper on FR4 board.
See https://epc-co.com/epc/documents/product-training/Appnote_Thermal_Performance_of_eGaN_FETs.pdf for details

Scan QR code or click link below for more information including reliability reports, device models, demo boards!

https://l.ead.me/EPC2107

Static Characteristics (T_J = 25°C unless otherwise stated)							
DEVICE	PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
Q1 & Q2	BV_{DSS}	Drain-to-Source Voltage	V_{GS} = 0 V, I_D = 0.3 mA	100			V
	I_{DSS}	Drain-Source Leakage	V_{GS} = 0 V, V_{DS} = 80 V		0.05	0.25	mA
	I_{GSS}	Gate-to-Source Forward Leakage	V_{GS} = 5 V		0.1	1	mA
		Gate-to-Source Reverse Leakage	V_{GS} = -4 V		0.05	0.25	mA
	$V_{GS(TH)}$	Gate Threshold Voltage	V_{DS} = V_{GS}, I_D = 0.1 mA	0.8	1.6	2.5	V
	$R_{DS(on)}$	Drain-Source On Resistance	V_{GS} = 5 V, I_D = 2 A		250	390	mΩ
	V_{SD}	Source-Drain Forward Voltage	V_{GS} = 0 V, I_S = 0.5 A		2.5		V
Q3	BV_{DSS}	Drain-to-Source Voltage	V_{GS} = 0 V, I_D = 0.125 mA	100			V
	I_{DSS}	Drain-Source Leakage	V_{GS} = 0 V, V_{DS} = 80 V		0.02	0.1	mA
	I_{GSS}	Gate-to-Source Forward Leakage	V_{GS} = 5 V		0.1	1	mA
	V_F	Source-Gate Forward Voltage	I_F = 0.2 mA, V_{DS} = 0 V			2.7	V
	$V_{GS(TH)}$	Gate Threshold Voltage	V_{DS} = V_{GS}, I_D = 0.1 mA	0.8	1.7	2.5	V
	$R_{DS(on)}$	Drain-Source On Resistance	V_{GS} = 5 V, I_D = 0.05 A		2100	3300	mΩ
	V_{SD}	Source-Drain Forward Voltage	V_{GS} = 0 V, I_S = 0.1 A		2.9		V

Dynamic Characteristics (T_J = 25°C unless otherwise stated)							
DEVICE	PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
Q1	C_{ISS}	Input Capacitance	V_{GS} = 0 V, V_{DS} = 50 V		21	25	pF
	C_{RSS}	Reverse Transfer Capacitance			0.2		
	C_{OSS}	Output Capacitance			9.2	14	
	$C_{OSS(ER)}$	Effective Output Capacitance, Energy Related (Note 2)	V_{GS} = 0 V, V_{DS} = 0 to 50 V		13		
	$C_{OSS(TR)}$	Effective Output Capacitance, Time Related (Note 3)			18		
	R_G	Gate Resistance			0.7		Ω
	Q_G	Total Gate Charge	V_{GS} = 5 V, V_{DS} = 50 V, I_D = 2 A		190	230	pC
	Q_{GS}	Gate to Source Charge	V_{DS} = 50 V, I_D = 2 A		77		
	Q_{GD}	Gate to Drain Charge			41		
	$Q_{G(TH)}$	Gate Charge at Threshold			49		
	Q_{OSS}	Output Charge	V_{GS} = 0 V, V_{DS} = 50 V		900	1350	
	Q_{RR}	Source-Drain Recovery Charge			0		
Q2	C_{ISS}	Input Capacitance	V_{GS} = 0 V, V_{DS} = 50 V		21	25	pF
	C_{RSS}	Reverse Transfer Capacitance			0.2		
	C_{OSS}	Output Capacitance			14	21	
	$C_{OSS(ER)}$	Effective Output Capacitance, Energy Related (Note 2)	V_{GS} = 0 V, V_{DS} = 0 to 50 V		19		
	$C_{OSS(TR)}$	Effective Output Capacitance, Time Related (Note 3)			25		
	R_G	Gate Resistance			0.7		Ω
	Q_G	Total Gate Charge	V_{GS} = 5 V, V_{DS} = 50 V, I_D = 2 A		190	230	pC
	Q_{GS}	Gate to Source Charge	V_{DS} = 50 V, I_D = 2 A		77		
	Q_{GD}	Gate to Drain Charge			41		
	$Q_{G(TH)}$	Gate Charge at Threshold			49		
	Q_{OSS}	Output Charge	V_{GS} = 0 V, V_{DS} = 50 V		1250	1875	
	Q_{RR}	Source-Drain Recovery Charge			0		
Q3	C_{ISS}	Input Capacitance	V_{GS} = 0 V, V_{DS} = 50 V		7	8.4	pF
	C_{RSS}	Reverse Transfer Capacitance			0.02		
	C_{OSS}	Output Capacitance			1.6	2.4	
	$C_{OSS(ER)}$	Effective Output Capacitance, Energy Related (Note 2)	V_{GS} = 0 V, V_{DS} = 0 to 50 V		2.2		
	$C_{OSS(TR)}$	Effective Output Capacitance, Time Related (Note 3)			2.7		
	R_G	Gate Resistance			4.8		Ω
	Q_G	Total Gate Charge	V_{GS} = 5 V, V_{DS} = 50 V, I_D = 0.05 A		44	55	pC
	Q_{GS}	Gate to Source Charge	V_{DS} = 50 V, I_D = 0.05 A		20		
	Q_{GD}	Gate to Drain Charge			4		
	$Q_{G(TH)}$	Gate Charge at Threshold			18		
	Q_{OSS}	Output Charge	V_{GS} = 0 V, V_{DS} = 50 V		134	200	
	Q_{RR}	Source-Drain Recovery Charge			0		

Note 2: $C_{OSS(ER)}$ is a fixed capacitance that gives the same stored energy as C_{OSS} while V_{DS} is rising from 0 to 50% BV_{DSS}.
Note 3: $C_{OSS(ER)}$ is a fixed capacitance that gives the same charging time as C_{OSS} while V_{DS} is rising from 0 to 50% BV_{DSS}.

Figure 1a (Q1 & Q2): Typical Output Characteristics at 25°C

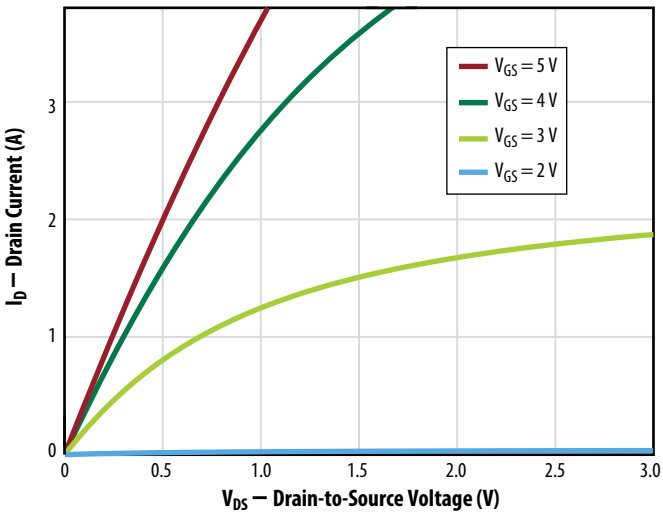


Figure 1b (Q3): Typical Output Characteristics at 25°C

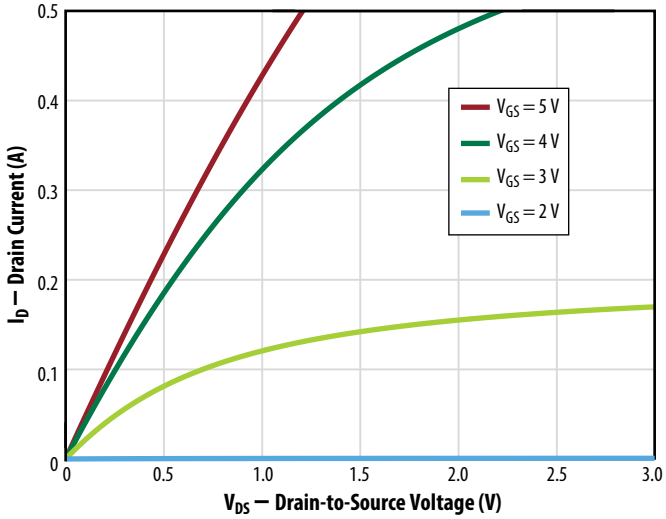


Figure 2a (Q1 & Q2): Typical Transfer Characteristics

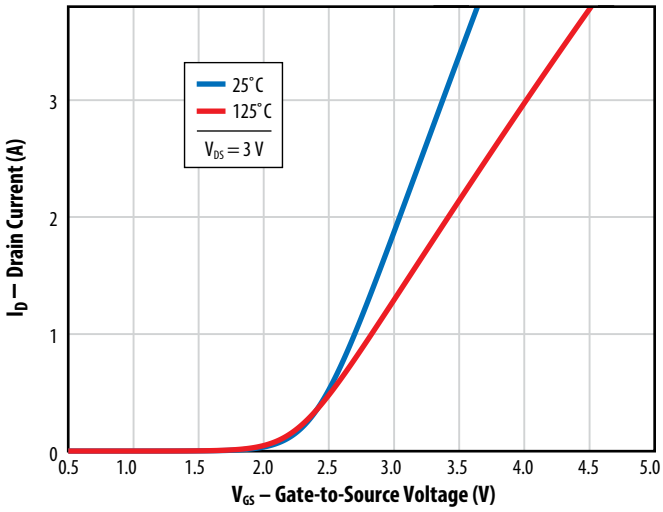


Figure 2b (Q3): Typical Transfer Characteristics

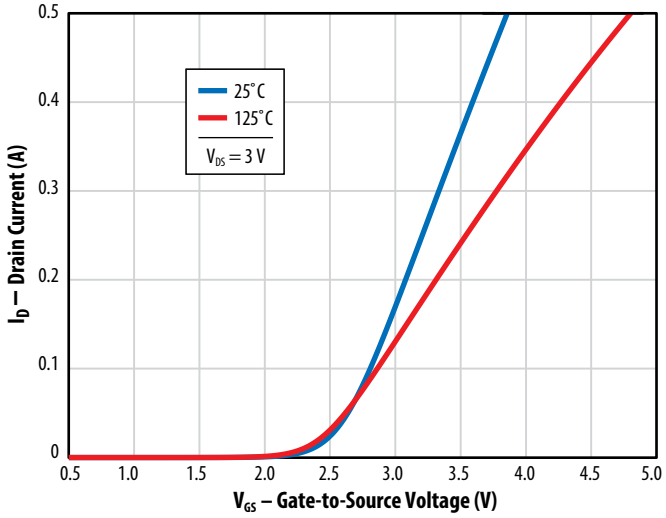


Figure 3a (Q1 & Q2): Typical $R_{DS(on)}$ vs. V_{GS} for Various Drain Currents

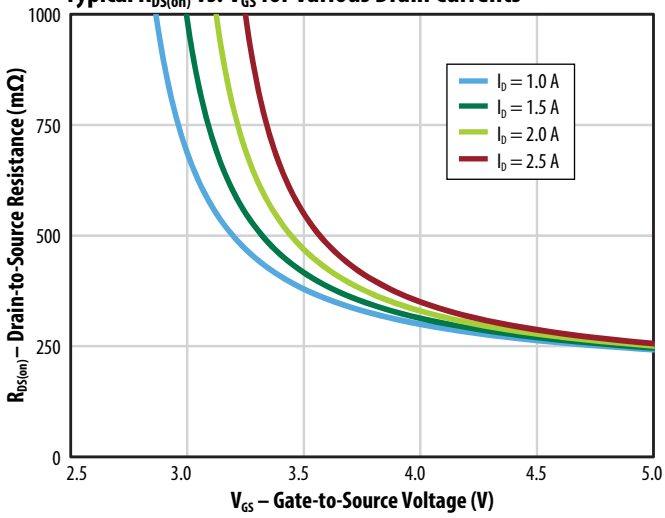


Figure 3b (Q3): Typical $R_{DS(on)}$ vs. V_{GS} for Various Drain Currents

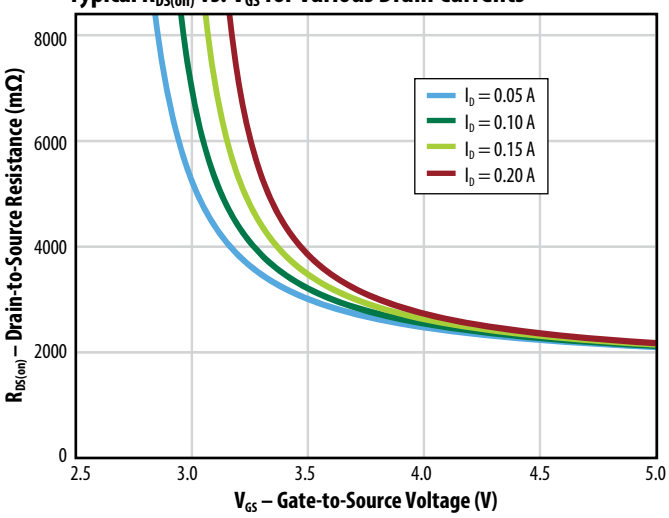


Figure 4a (Q1 & Q2):
Typical $R_{DS(on)}$ vs. V_{GS} for Various Temperatures

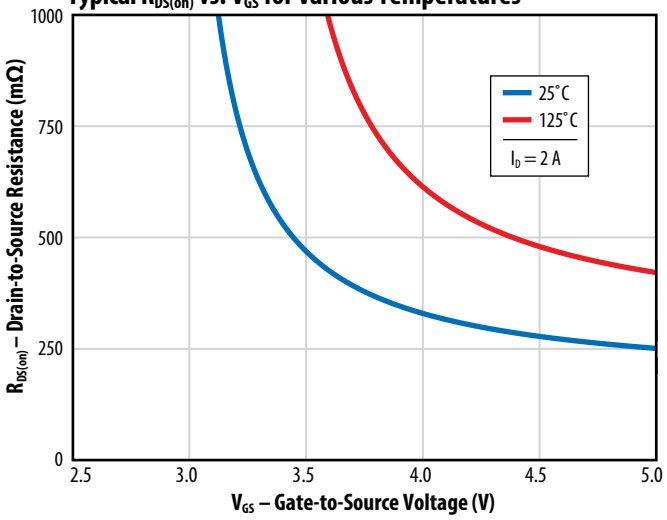


Figure 4b (Q3):
Typical $R_{DS(on)}$ vs. V_{GS} for Various Temperatures

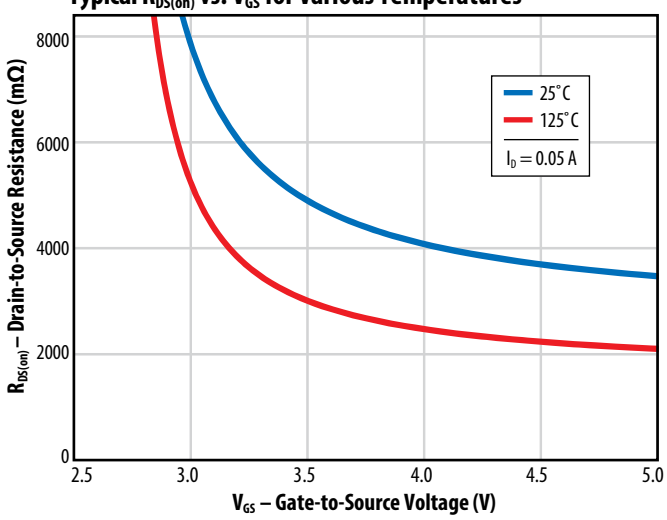


Figure 5a (Q1): Typical Capacitance (Linear Scale)

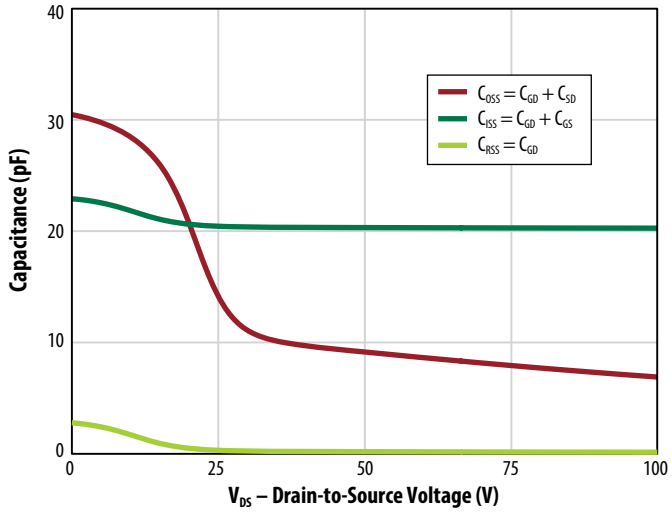


Figure 5b (Q1): Typical Capacitance (Log Scale)

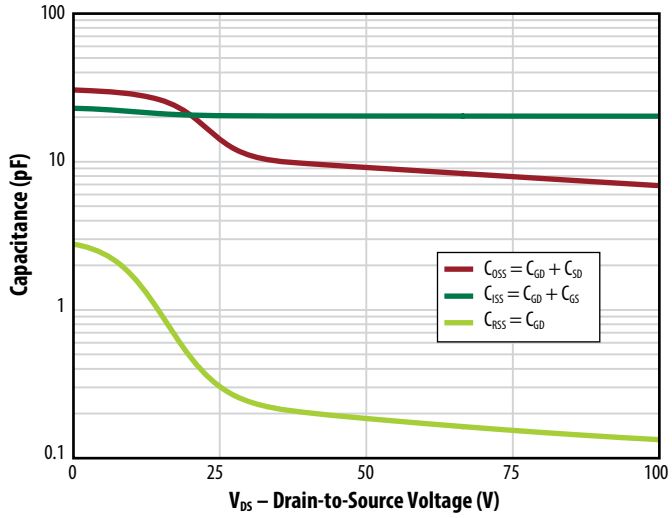


Figure 5c (Q2): Typical Capacitance (Linear Scale)

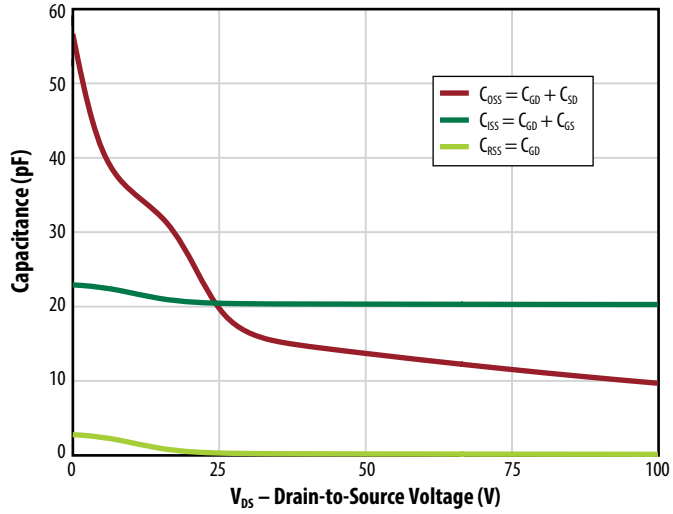


Figure 5d (Q2): Typical Capacitance (Log Scale)

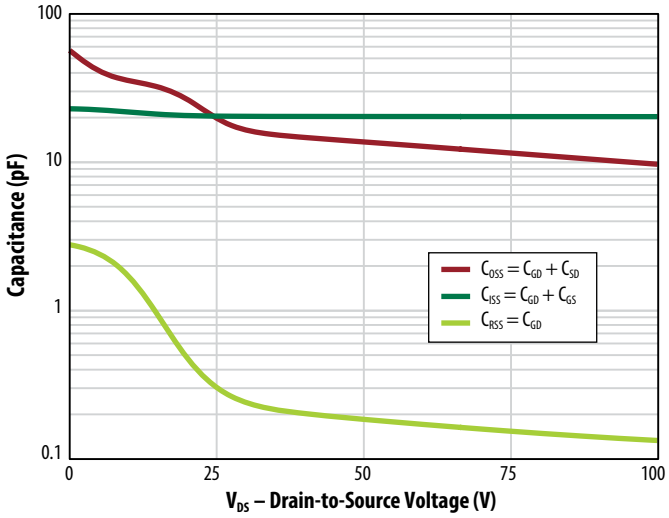


Figure 5e (Q3): Typical Capacitance (Linear Scale)

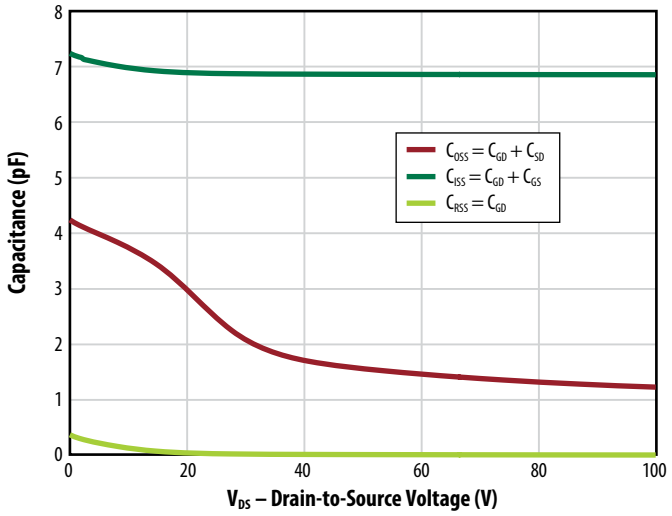


Figure 5f (Q3): Typical Capacitance (Log Scale)

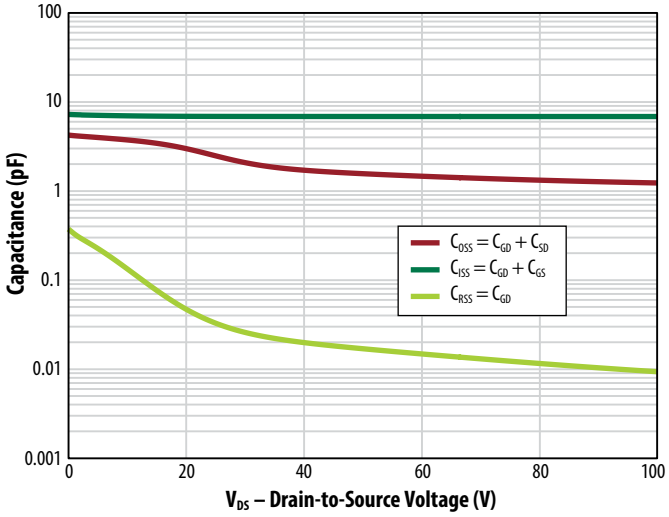


Figure 6a (Q1): Typical Output Charge and C_{OSS} Stored Energy

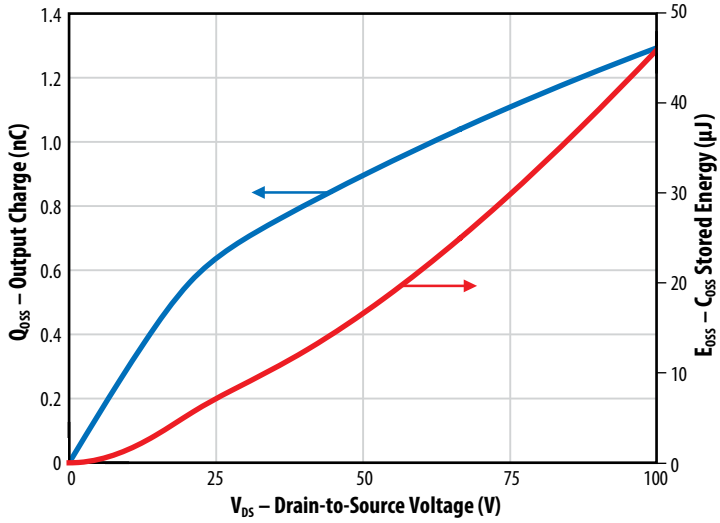


Figure 6b (Q2): Typical Output Charge and C_{OSS} Stored Energy

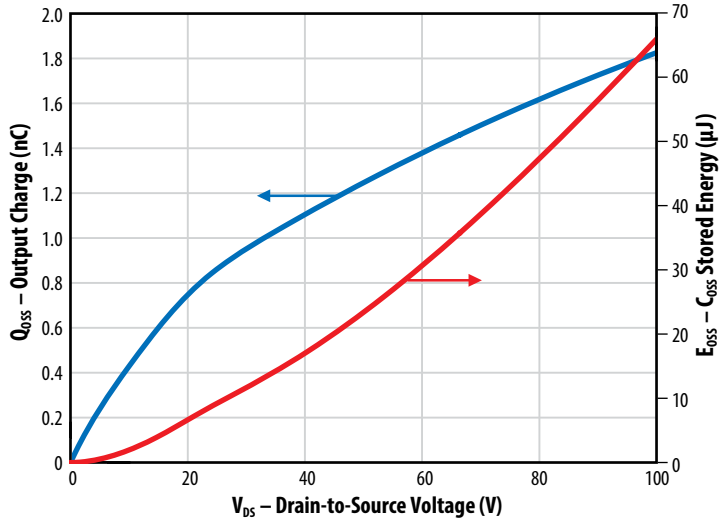


Figure 6c (Q3): Typical Output Charge and C_{OSS} Stored Energy

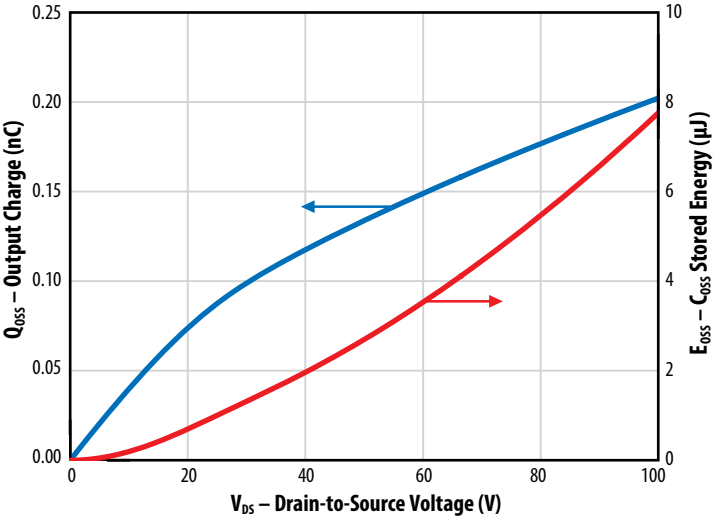


Figure 7a (Q1 & Q2): Typical Gate Charge

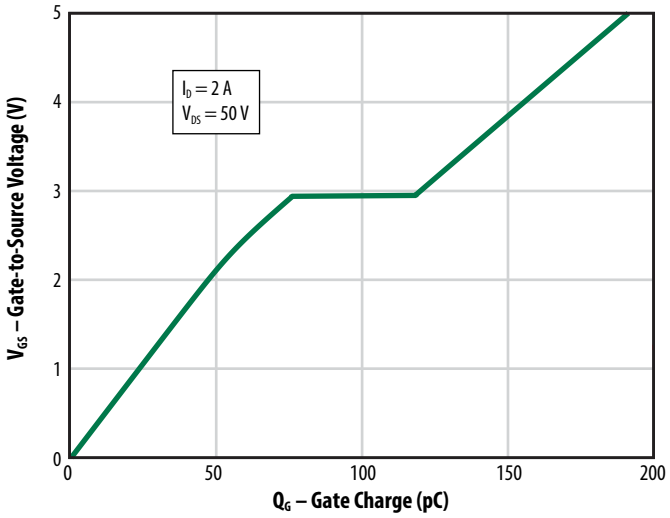


Figure 7b (Q3): Typical Gate Charge



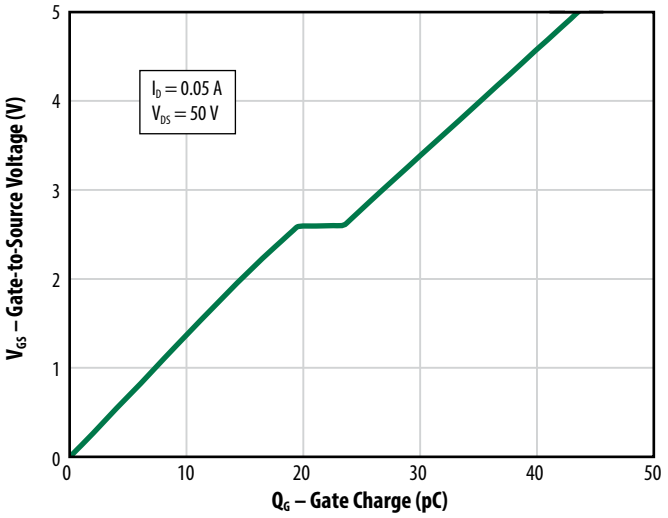


Figure 8a (Q1 & Q2): Typical Reverse Drain-Source Characteristics

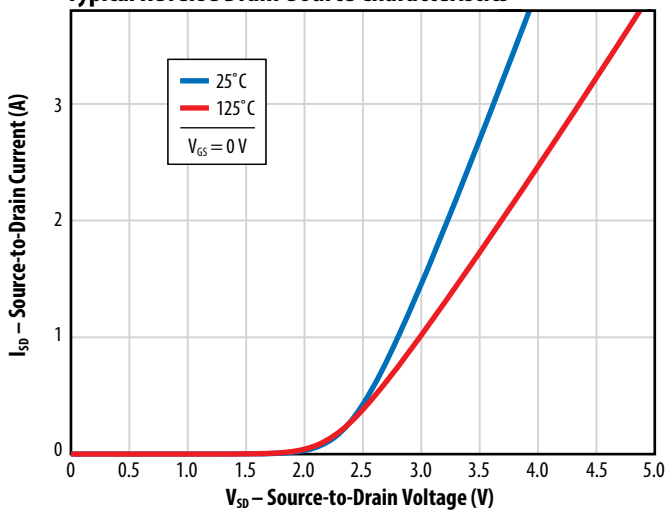

Note: Negative gate drive voltage increases the reverse drain-source voltage. EPC recommends 0 V for OFF.

Figure 8b (Q3): Typical Reverse Drain-Source Characteristics

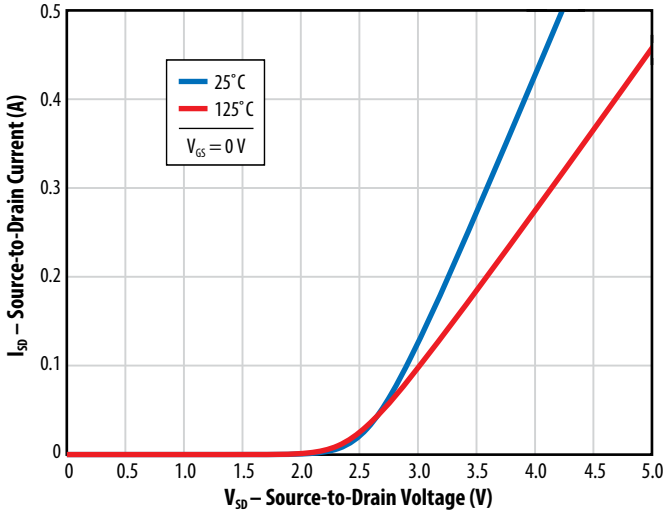

Note: Negative gate drive voltage increases the reverse drain-source voltage. EPC recommends 0 V for OFF.

Figure 9a (Q1 & Q2): Typical Normalized On-State Resistance vs. Temperature

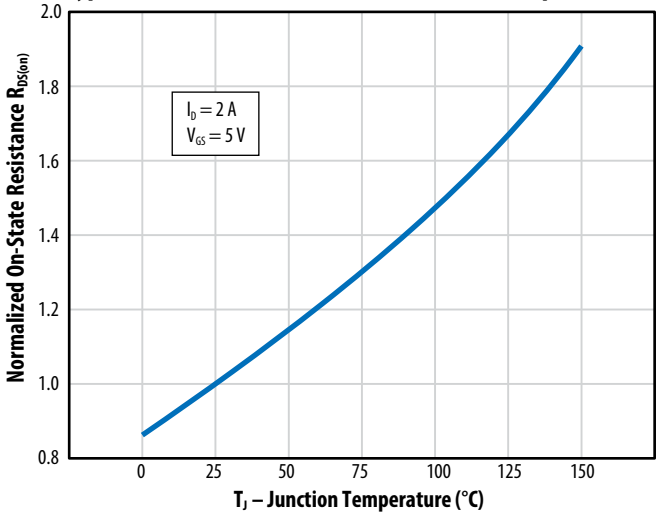


Figure 9b (Q3): Typical Normalized On-State Resistance vs. Temperature

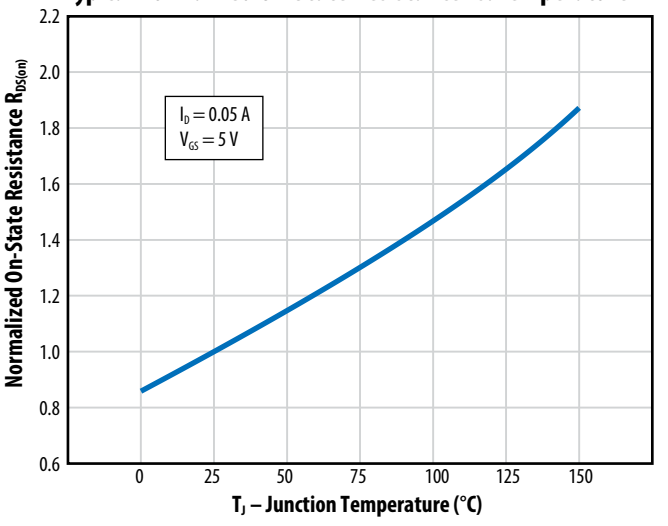


Figure 10a (Q1 & Q2):
Typical Normalized Threshold Voltage vs. Temperature

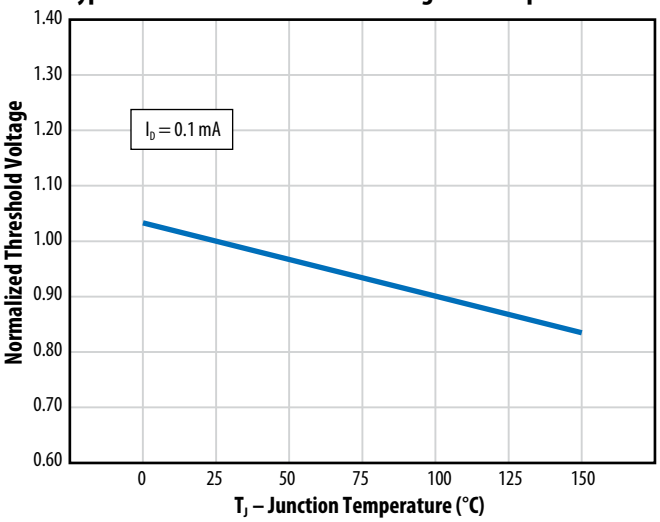


Figure 10b (Q3):
Typical Normalized Threshold Voltage vs. Temperature

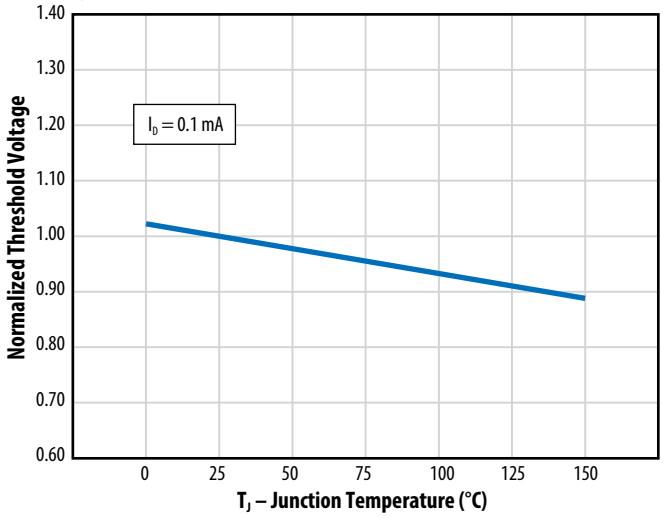


Figure 11a
Typical Transient Thermal Response Curves

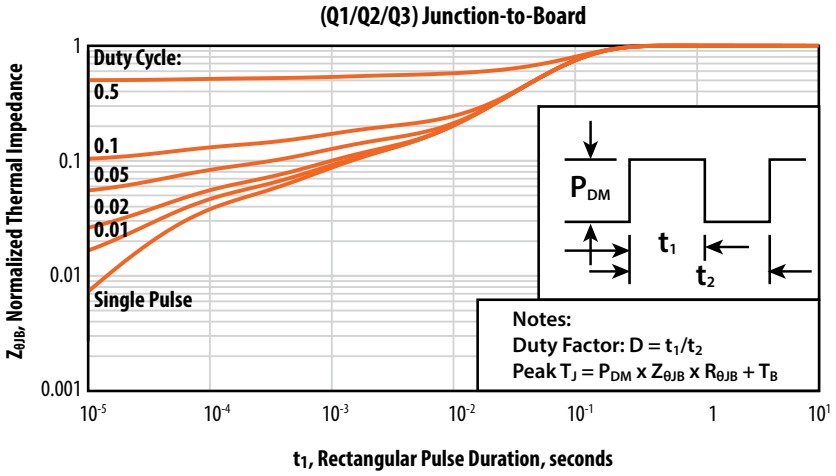


Figure 11b
Typical Transient Thermal Response Curves

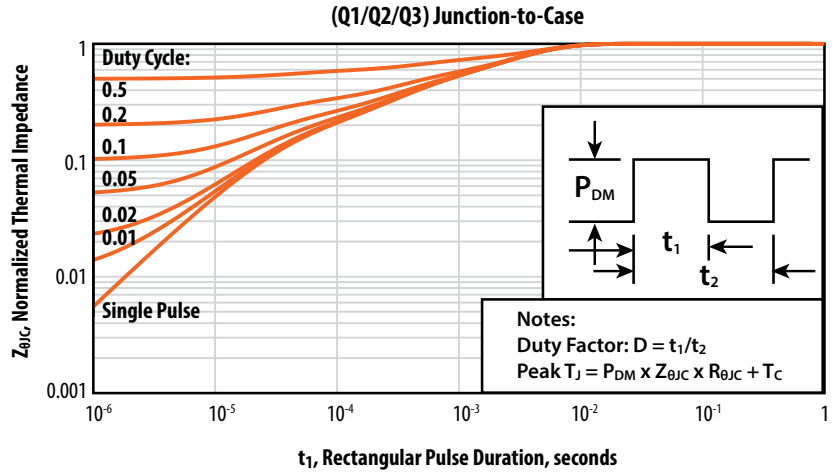


Figure 12 (Q1 & Q2): Safe Operating Area

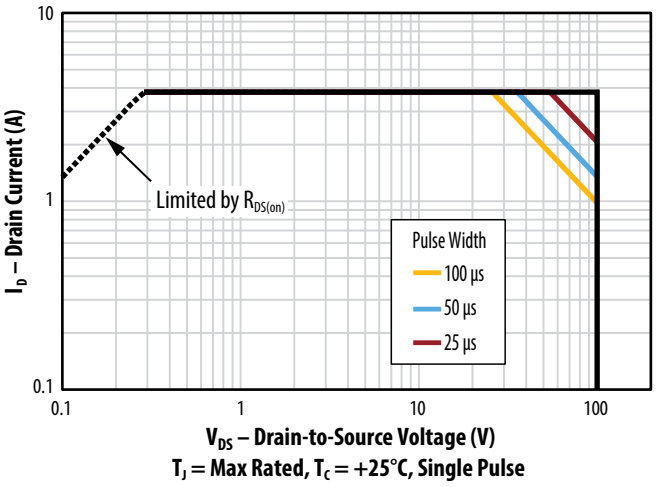


Figure 13 (Q3): Typical Gate-Source Characteristics



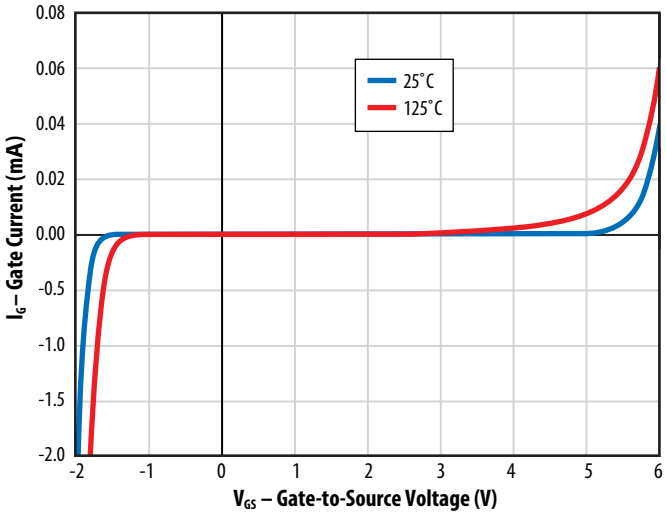


Figure 14: Typical Application Circuit

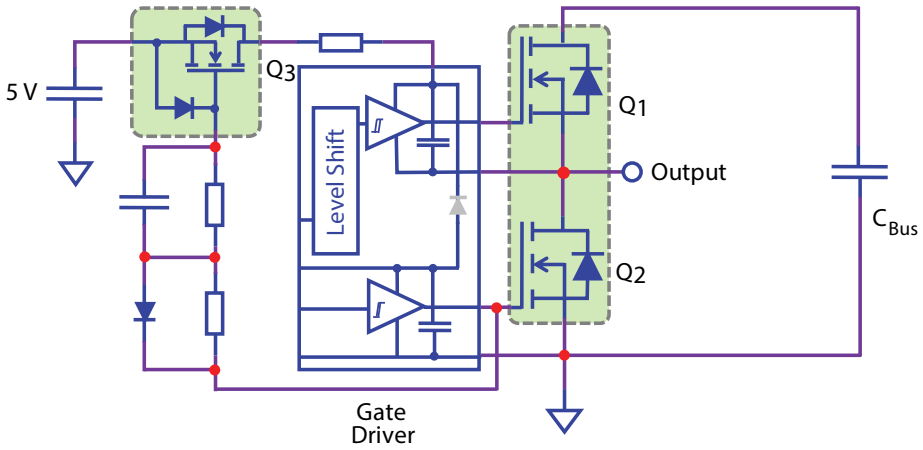

TAPE AND REEL CONFIGURATION


4mm pitch, 8mm wide tape on 7" reel

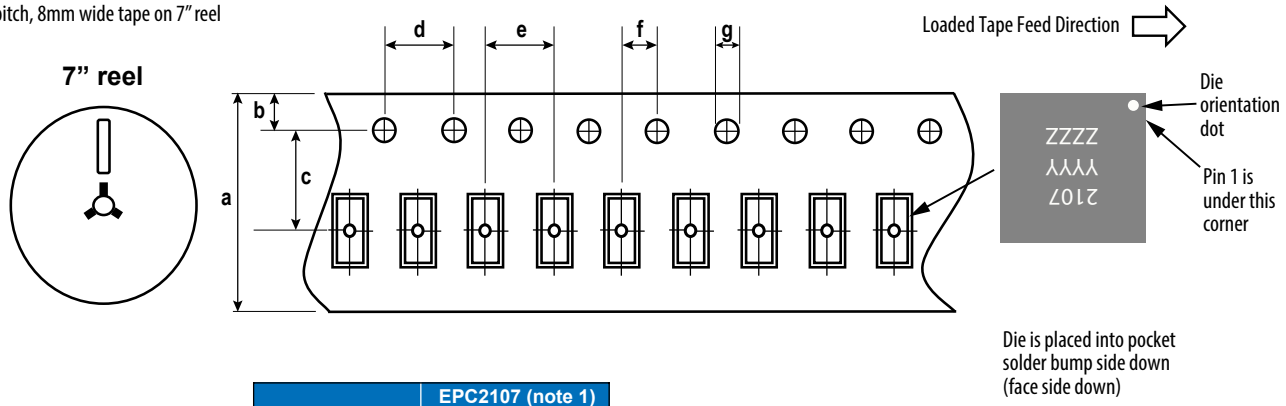

	EPC2107 (note 1)		
Dimension (mm)	target	min	max
a	8.00	7.90	8.30
b	1.75	1.65	1.85
c (see note)	3.50	3.45	3.55
d	4.00	3.90	4.10
e	4.00	3.90	4.10
f (see note)	2.00	1.95	2.05
g	1.5	1.5	1.6

Note 1: MSL 1 (moisture sensitivity level 1) classified according to IPC/JEDEC industry standard.
Note 2: Pocket position is relative to the sprocket hole measured as true position of the pocket, not the pocket hole.


DIE MARKINGS

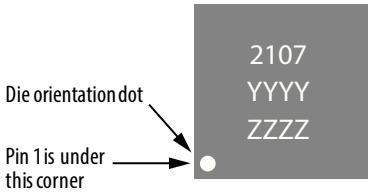

Part Number	Laser Markings		
	Part # Marking Line 1	Lot_Date Code Marking Line 2	Lot_Date Code Marking Line 3
EPC2107	2107	YYYY	ZZZZ

DIE OUTLINE

Solder Bump View

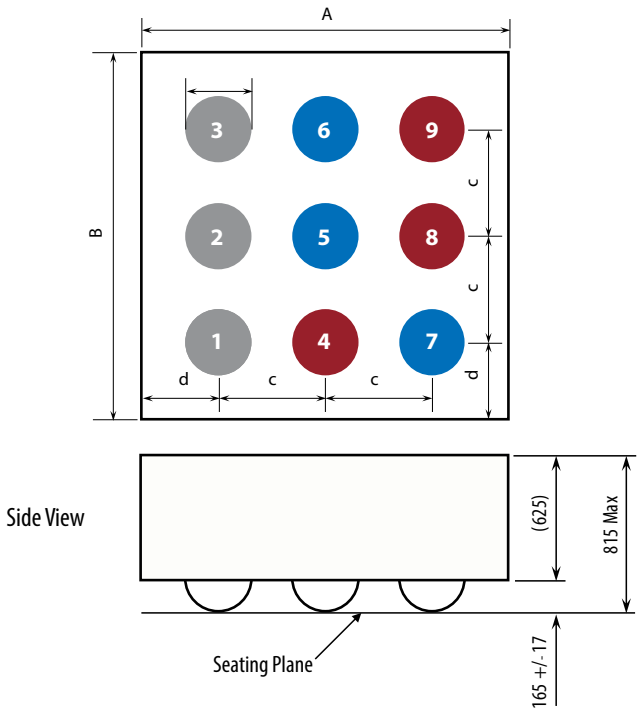


Side View

DIM	Micrometers		
	MIN	Nominal	MAX
A	1320	1350	1380
B	1320	1350	1380
c	450	450	450
d	210	225	240
e	187	208	229

Pad 1 is Gate1 (Q1)
Pad 2 is Gate2 (Q2)
Pad 3 is Gate 3 (Q3)
Pad 7 is Drain1 (Q1)
Pad 5 is Drain2 (Q2)
Pad 6 is Drain3 (Q3)
Pad 4 is Source1 (Q1)
Pad 8 is Source2 (Q2)
Pad 9 is Source3 (Q3)

RECOMMENDED LAND PATTERN


(measurements in µm)

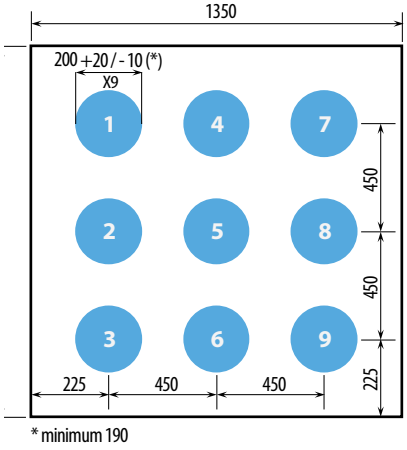

The land pattern is solder mask defined.

RECOMMENDED STENCIL DRAWING

(measurements in µm)

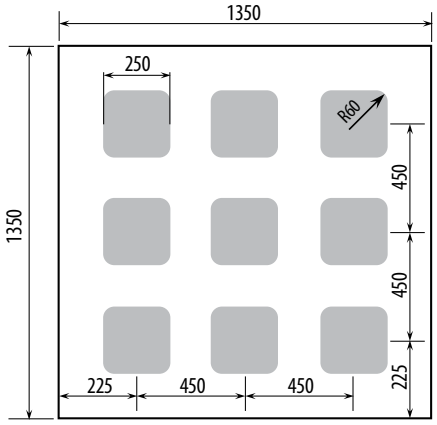

Recommended stencil should be 4 mil (100 µm) thick, must be laser cut, openings per drawing.

Intended for use with SAC305 Type 4 solder, reference 88.5% metals content.

Additional assembly resources available at https://epc-co.com/epc/design-support

Efficient Power Conversion Corporation (EPC) reserves the right to make changes without further notice to any products herein to improve reliability, function or design. EPC does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

eGaN® is a registered trademark of Efficient Power Conversion Corporation.
EPC Patent Listing: https://epc-co.com/epc/about-epc/patents

Information subject to change without notice.